

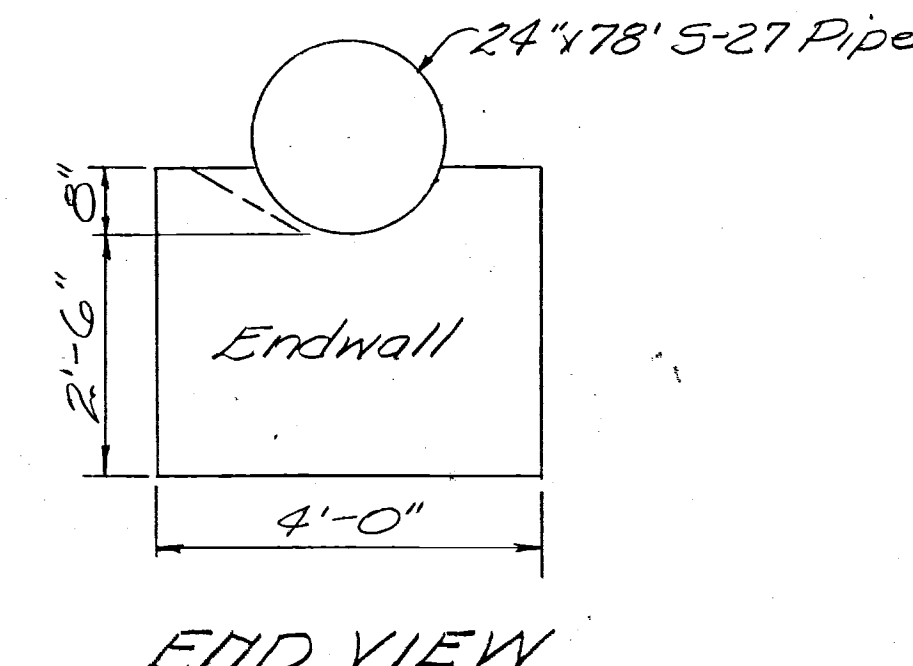
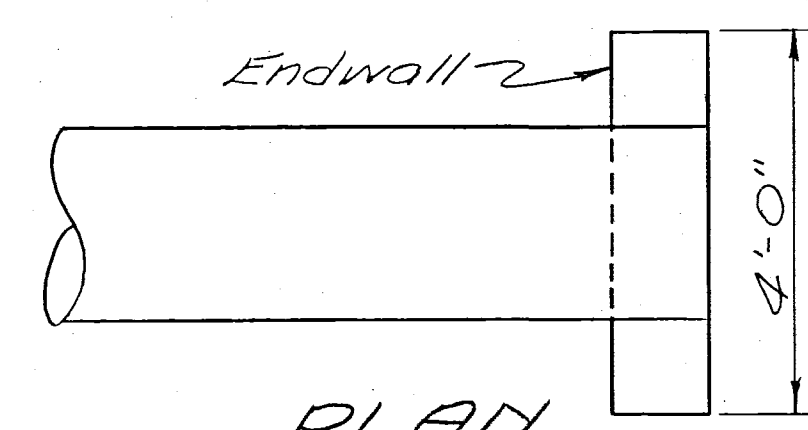
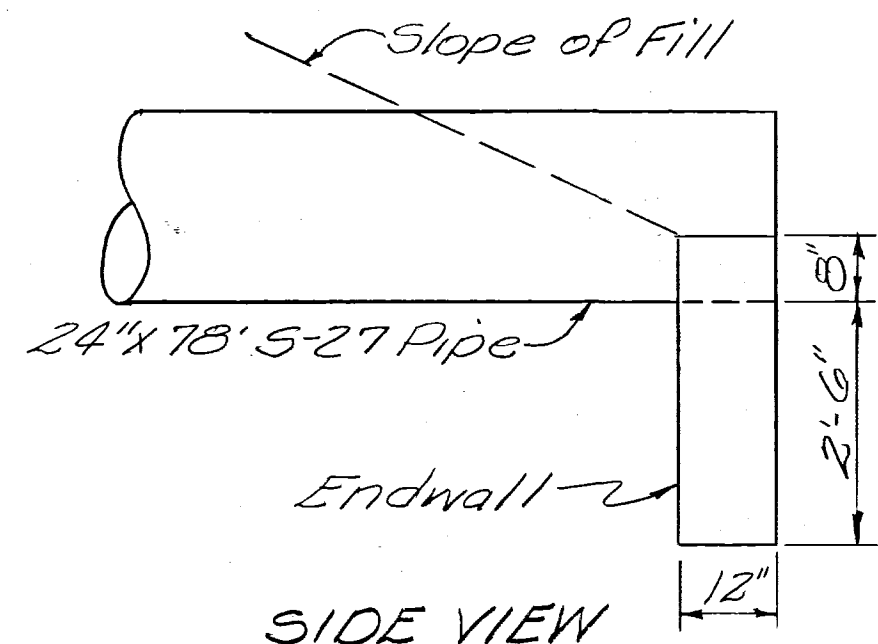


MUSKINGUM COUNTY


MUS-156-2.85

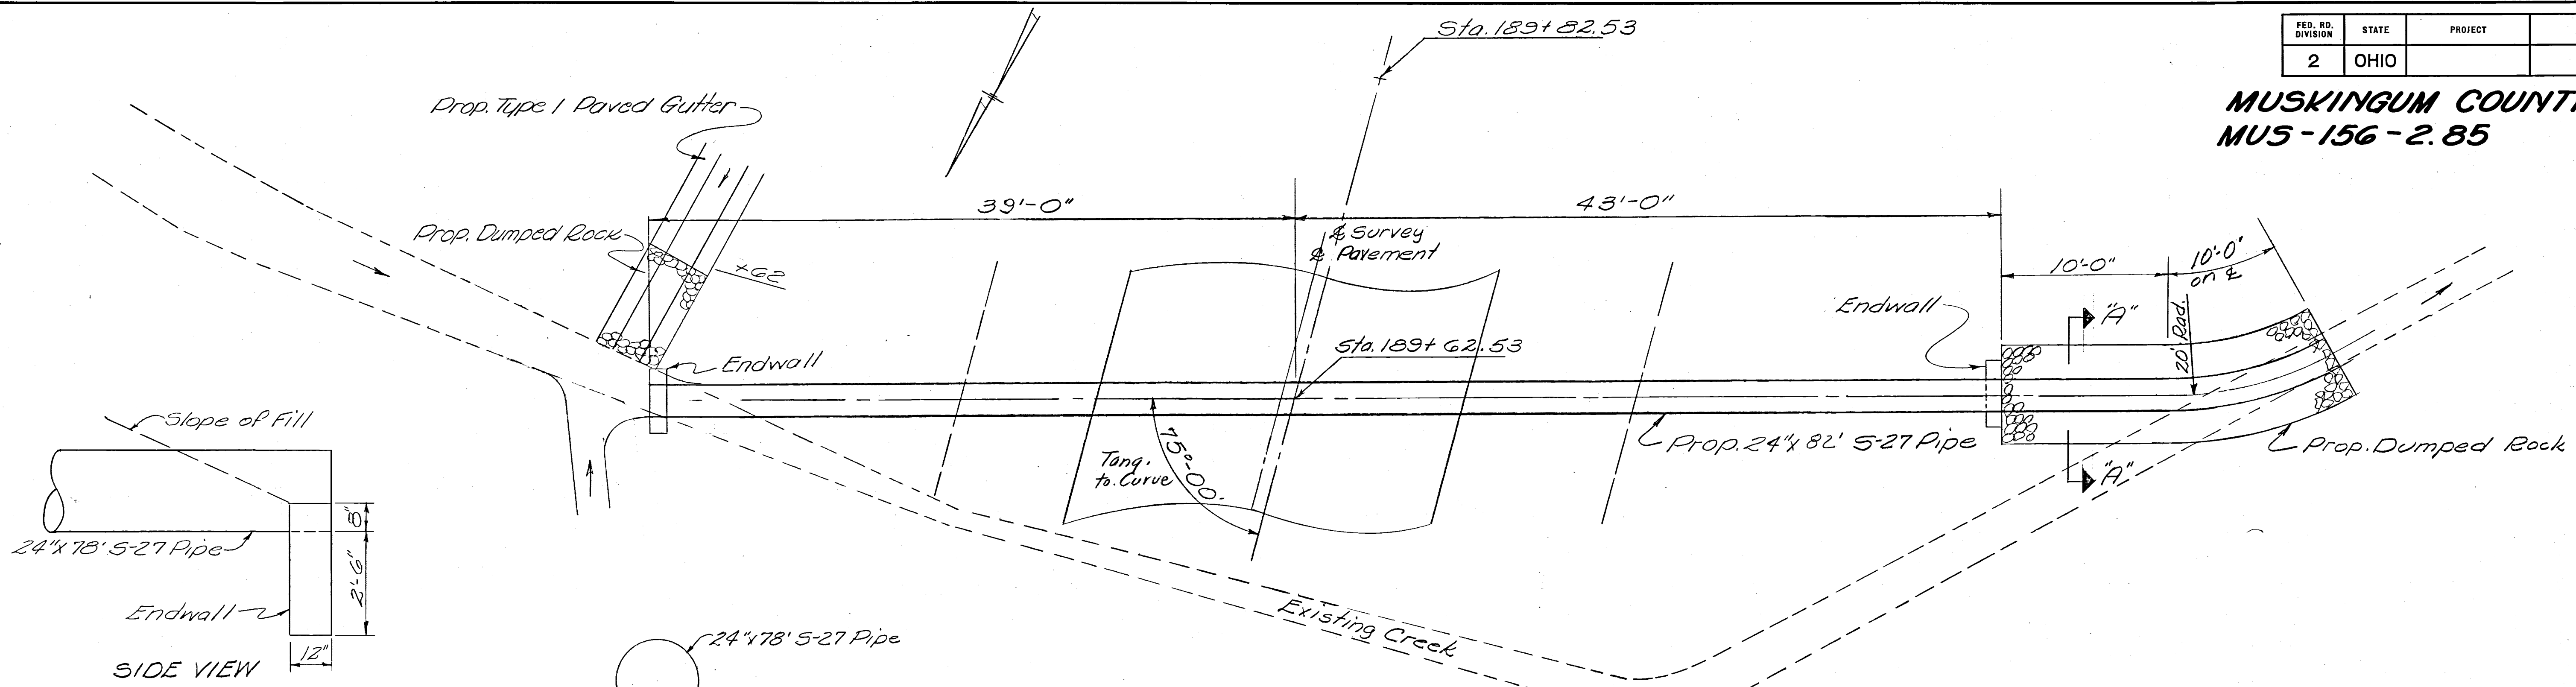

DETAIL OF CONCRETE ENDWALL

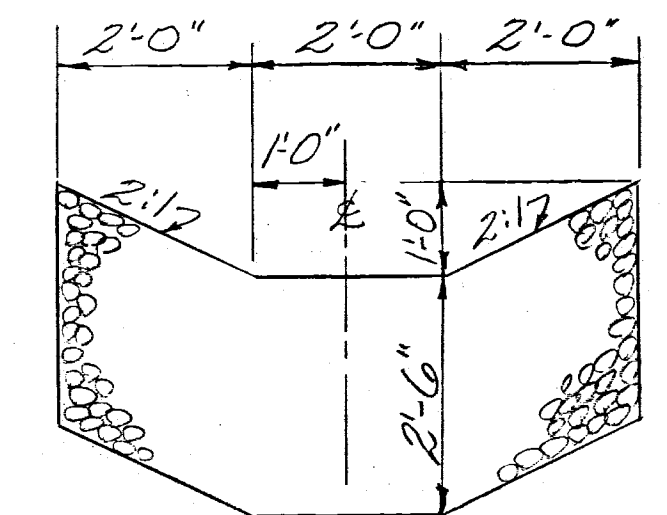

DRAINAGE DATA	
Area	14 Acres
Q10	21 c.f.s.

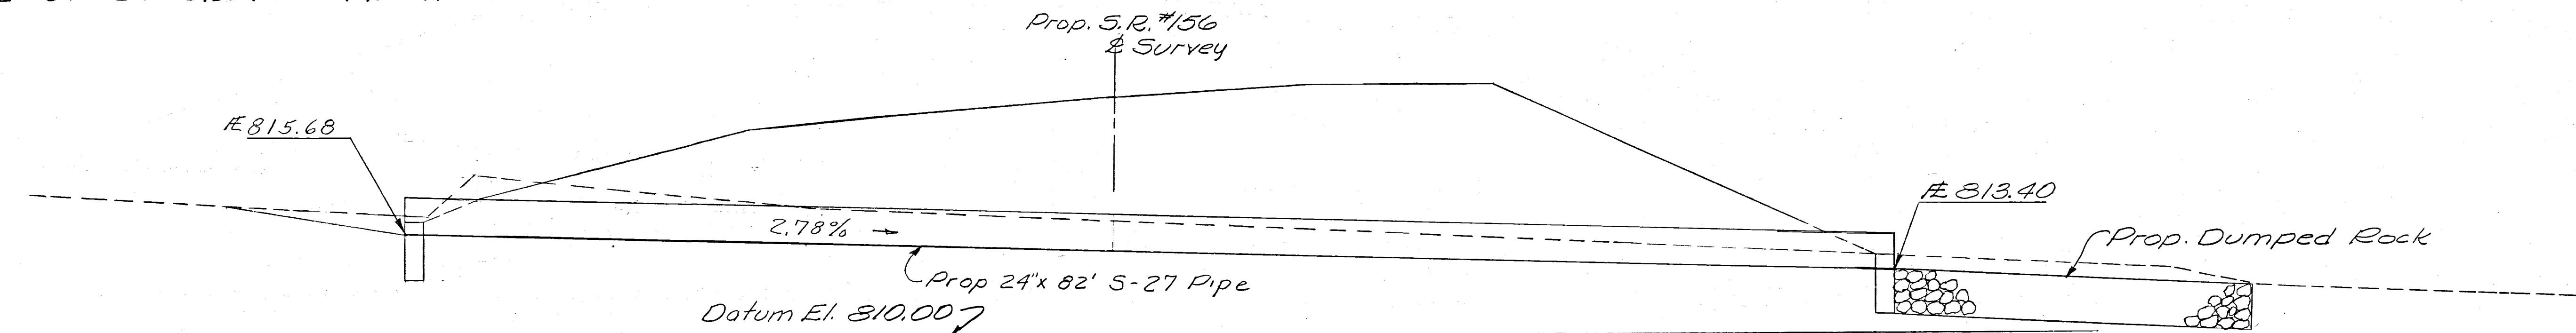

- ESTIMATED QUANTITIES**
- Item E-2 Excavation for Structure, Unclassified 27 Cu. Yds.
 - Item E-3 Channel Excavation 2 Cu. Yds.
 - Item I-10 Dumped Rock Channel Protection 11 Cu. Yds.
 - Item S-1 Concrete for Structures Class "E" 0.82 Cu. Yds.
 - Item S-27 24" Pipe for Roadway Culvert 82 Lin. Ft.

REVISION		DATE	DESCRIPTION	BY
U. S. ARMY ENGINEER DISTRICT, HUNTINGTON CORPS OF ENGINEERS HUNTINGTON, W. VA. LICKING RIVER DILLON RESERVOIR PROJECT RELOCATION OF OHIO STATE ROUTE NO. 156 (Section 3 & 4)				
DRAWN BY:		EER		
TRACED BY:		86W		
CHECKED BY:		86W		
SUBMITTED BY:		Elmer S. Barrett		
ELMER S. BARRETT ASSOCIATES		CHILLICOTHE, OHIO		
RECOMMENDED BY:		J. J. [Signature]		
CHIEF ENG. DIV.		COL. C. E. DISTRICT ENGINEER		
DATE:		JULY 1959		
SCALE: 1" = 5'		SPEC. NO.		
DRAWING NUMBER		027f-UD6-68/45		
SHEET		45 of 62		