

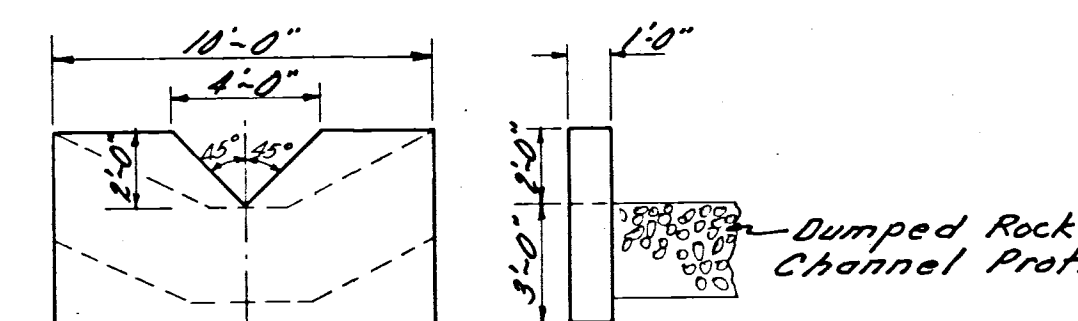


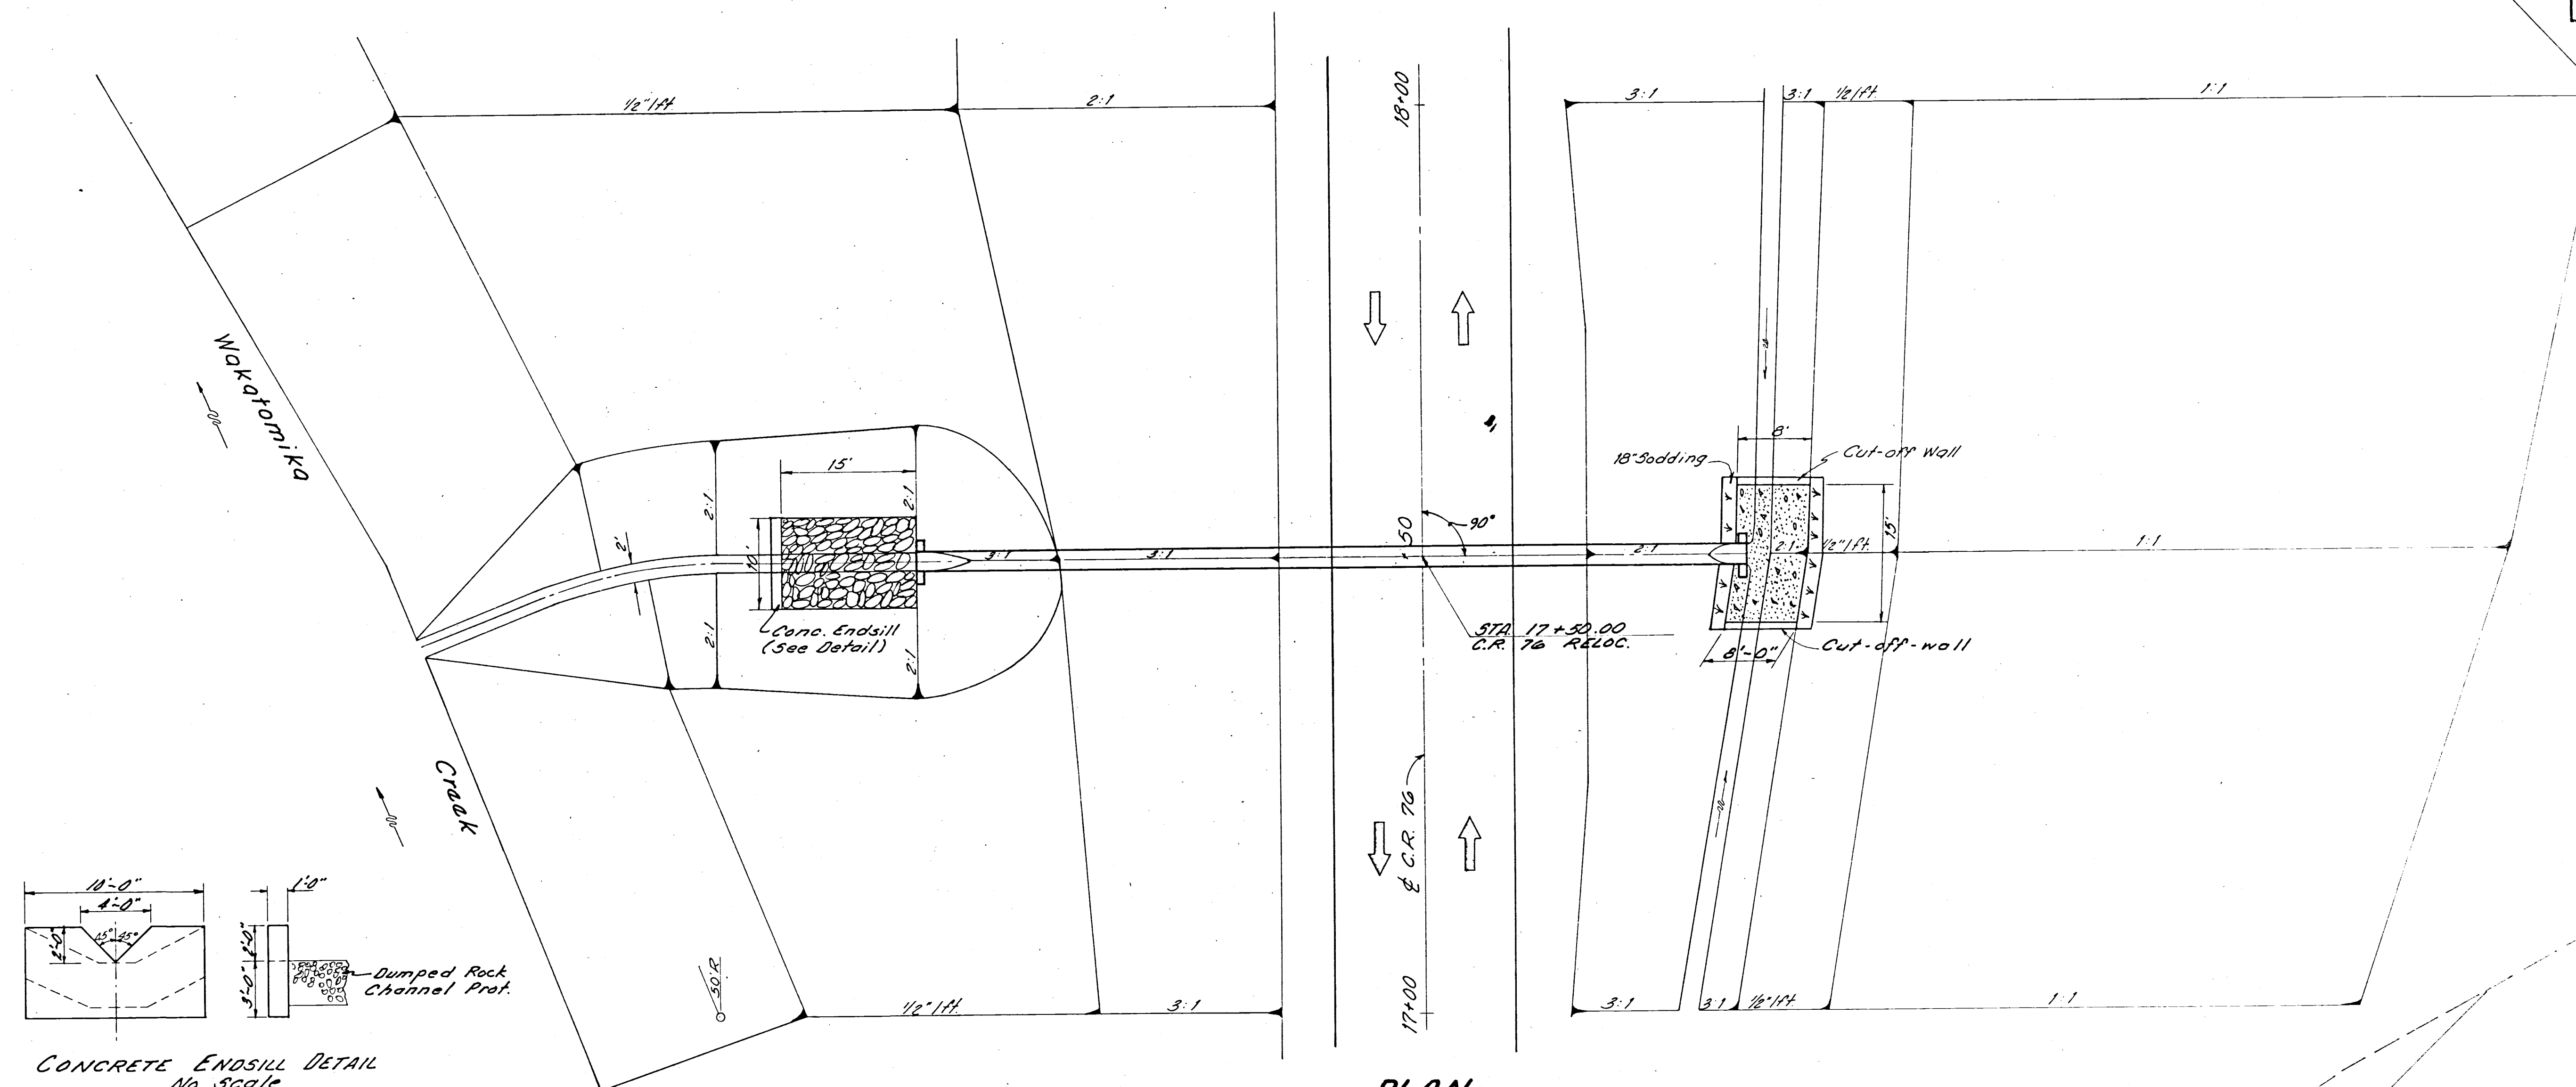


ESTIMATED QUANTITIES

ITEM 603	24" Conduit Type "A" with Class "B" Bedding (706.02 or 706.08)	92 L.F.
ITEM 602	Concrete Masonry	3.89 C.Y.
ITEM 601	Dumped Rock Channel Protection	14 C.Y.
ITEM 601	Riprap Using 6" Reinforced Concrete Slab As per Plan	13 S.Y.
ITEM 660	Sodding	3 S.Y.

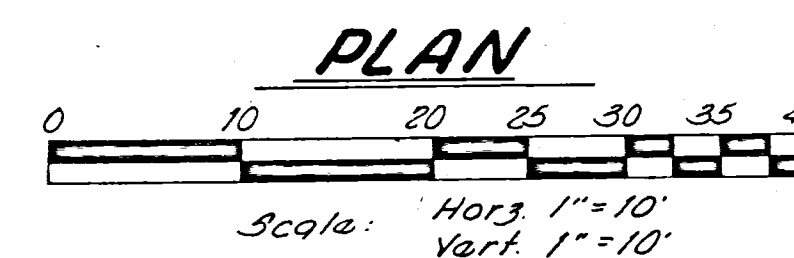

Drainage Area = 13 Ac.
 $Q_{10} = 276.13$

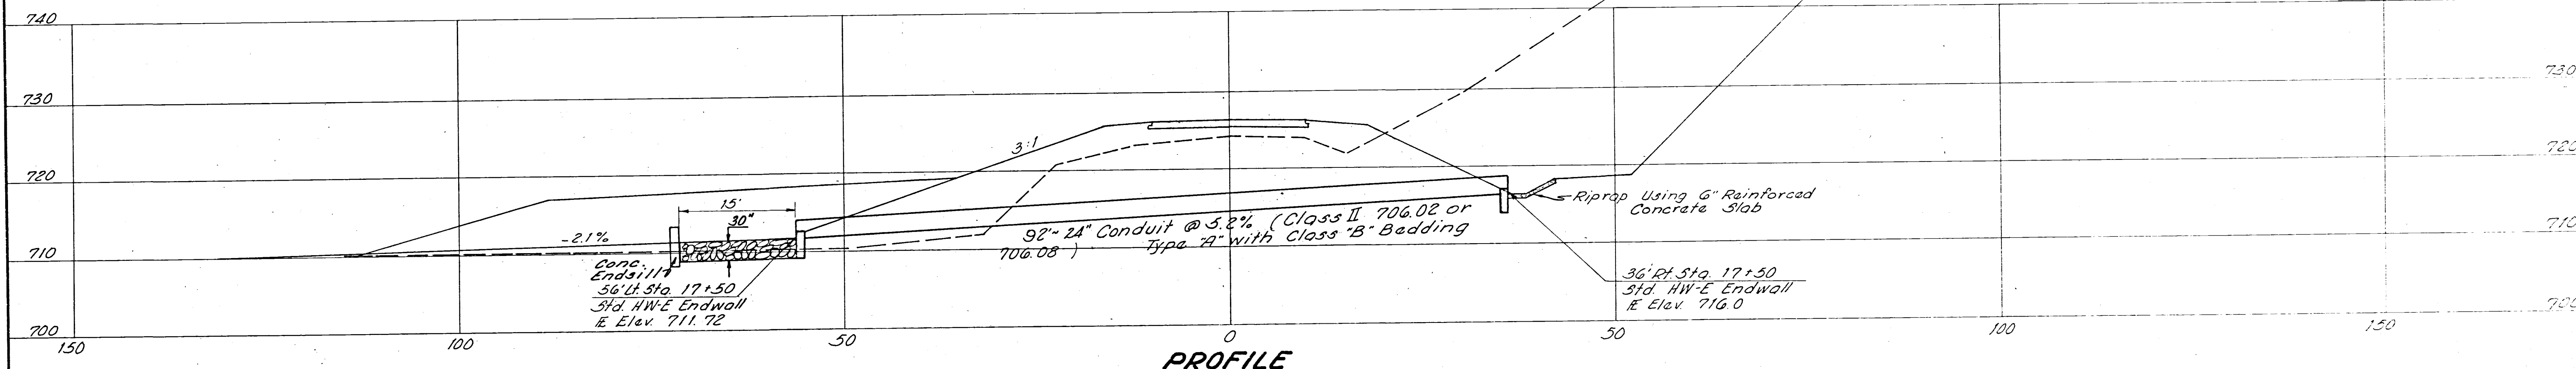

Note:
 Reference made to Standard
 Drawings MC-4 & HW-E