


FED. RD. DIST. NO.	STATE	FED. AID PROJECT	FISCAL YEAR
	OHIO		

29
31.

I.C.H. NO 10 SEC. "M"
MUSKINGUM COUNTY

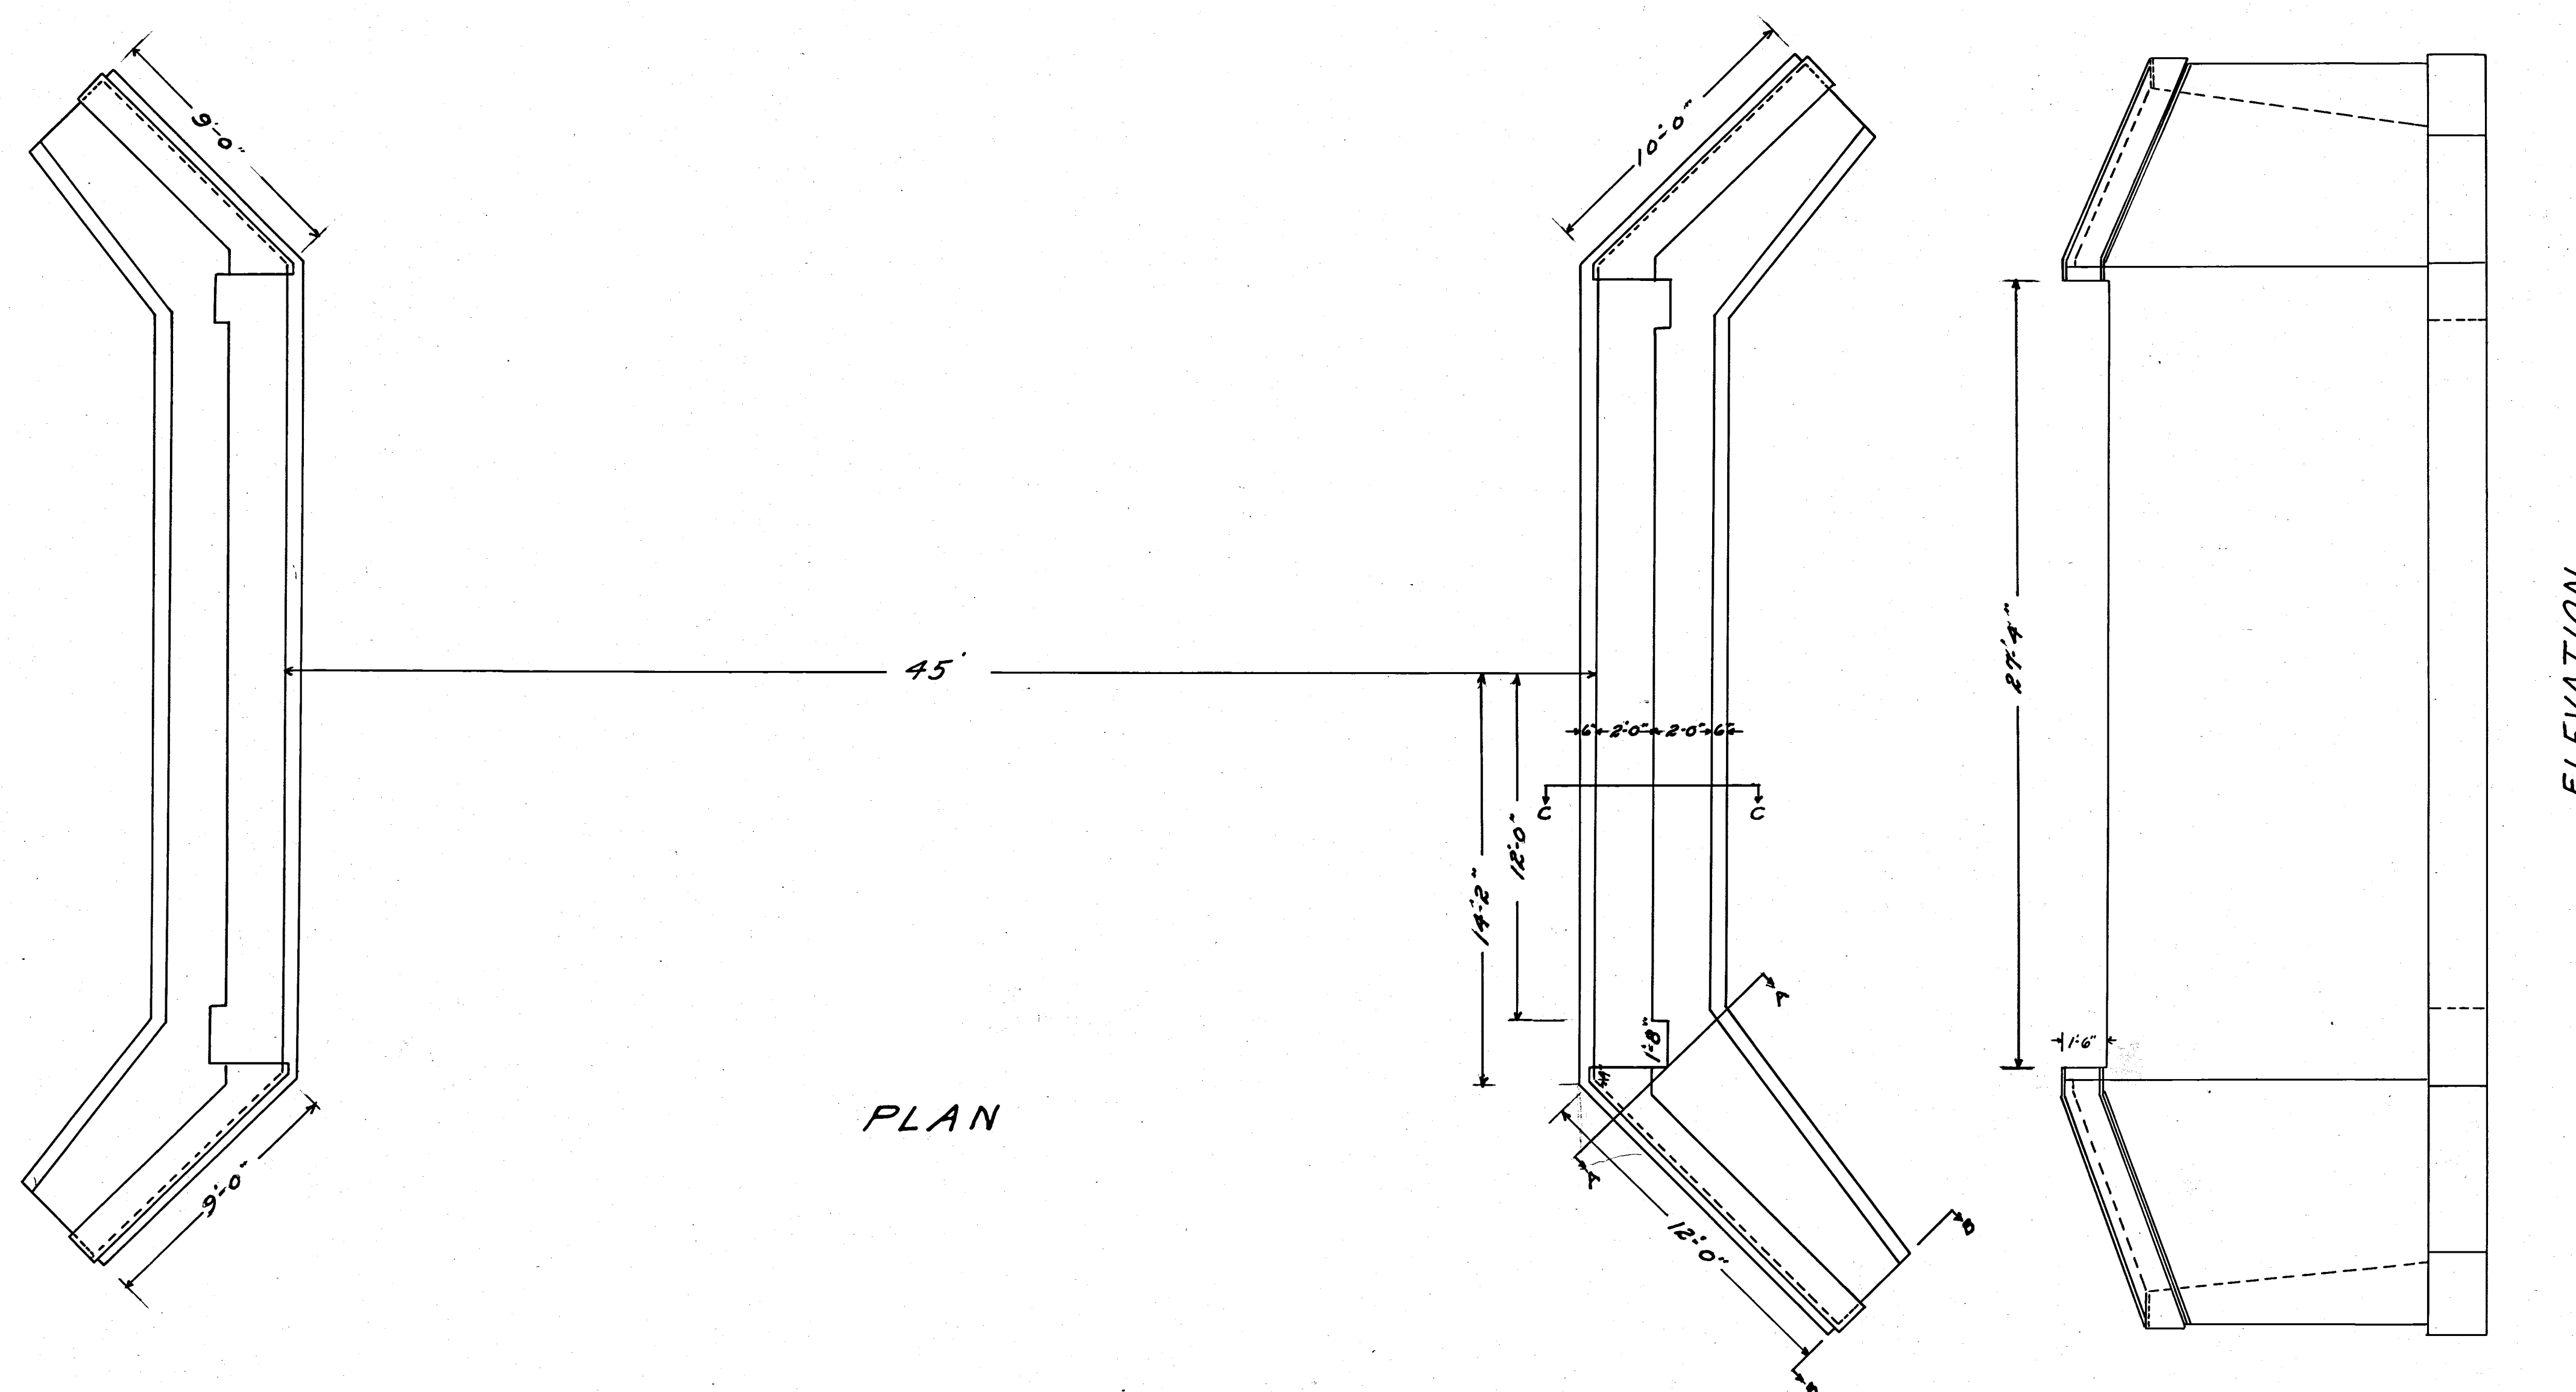



SUBSTRUCTURE

ESTIMATED	QUANTITIES
1-2 1/2-5 Concrete	112.8 Cu. yds
1-3-6 Concrete	31.5 Cu. yds
Excavation	190 Cu. yds
Reinforcing Steel	77 Lbs.
8-3/4" Tw. Bars 5 feet Long	

SUPER STRUCTURE

ESTIMATED	QUANTITIES
CONCRETE 1:2:4 =	31.7 Cu. yds 68.4
REINF. STEEL	6419 Cu. yds 14250
4 STD NO. 3 CONC. CURB SCUPPERS	

NOTE:- Superstructure to be Standard Concrete Girder G 15-24

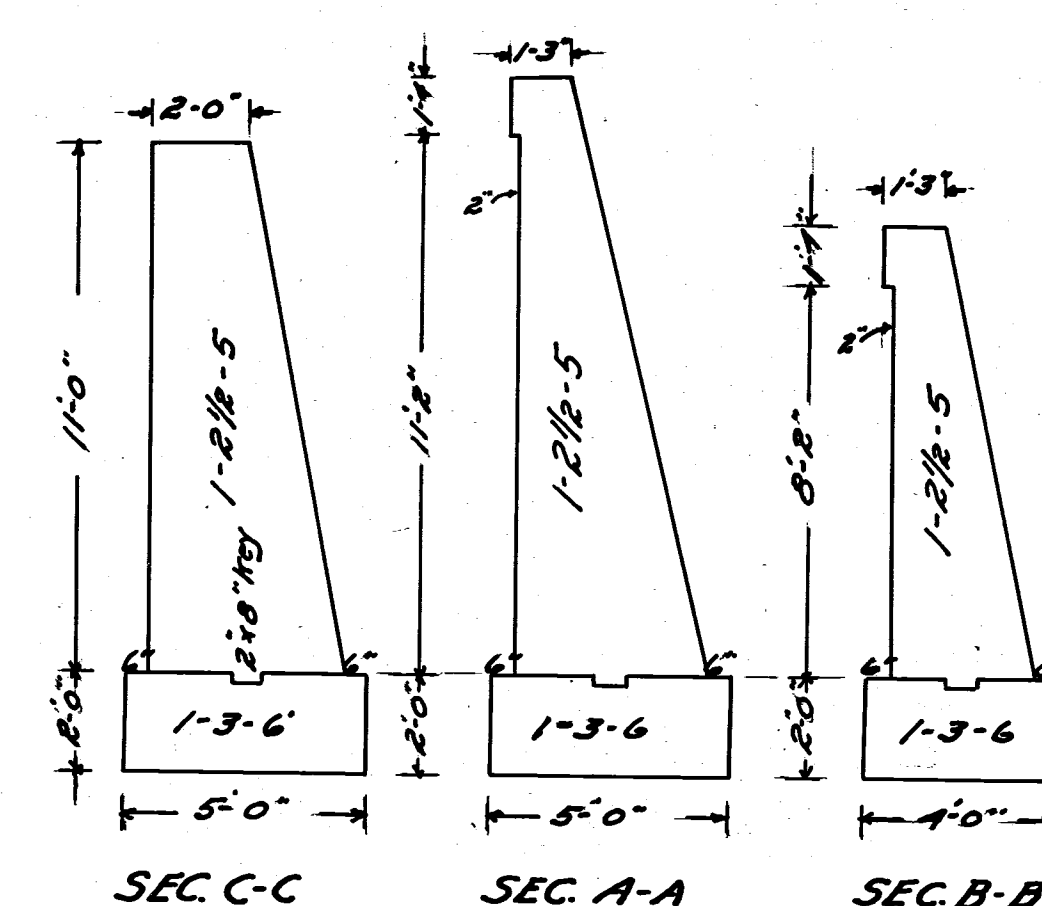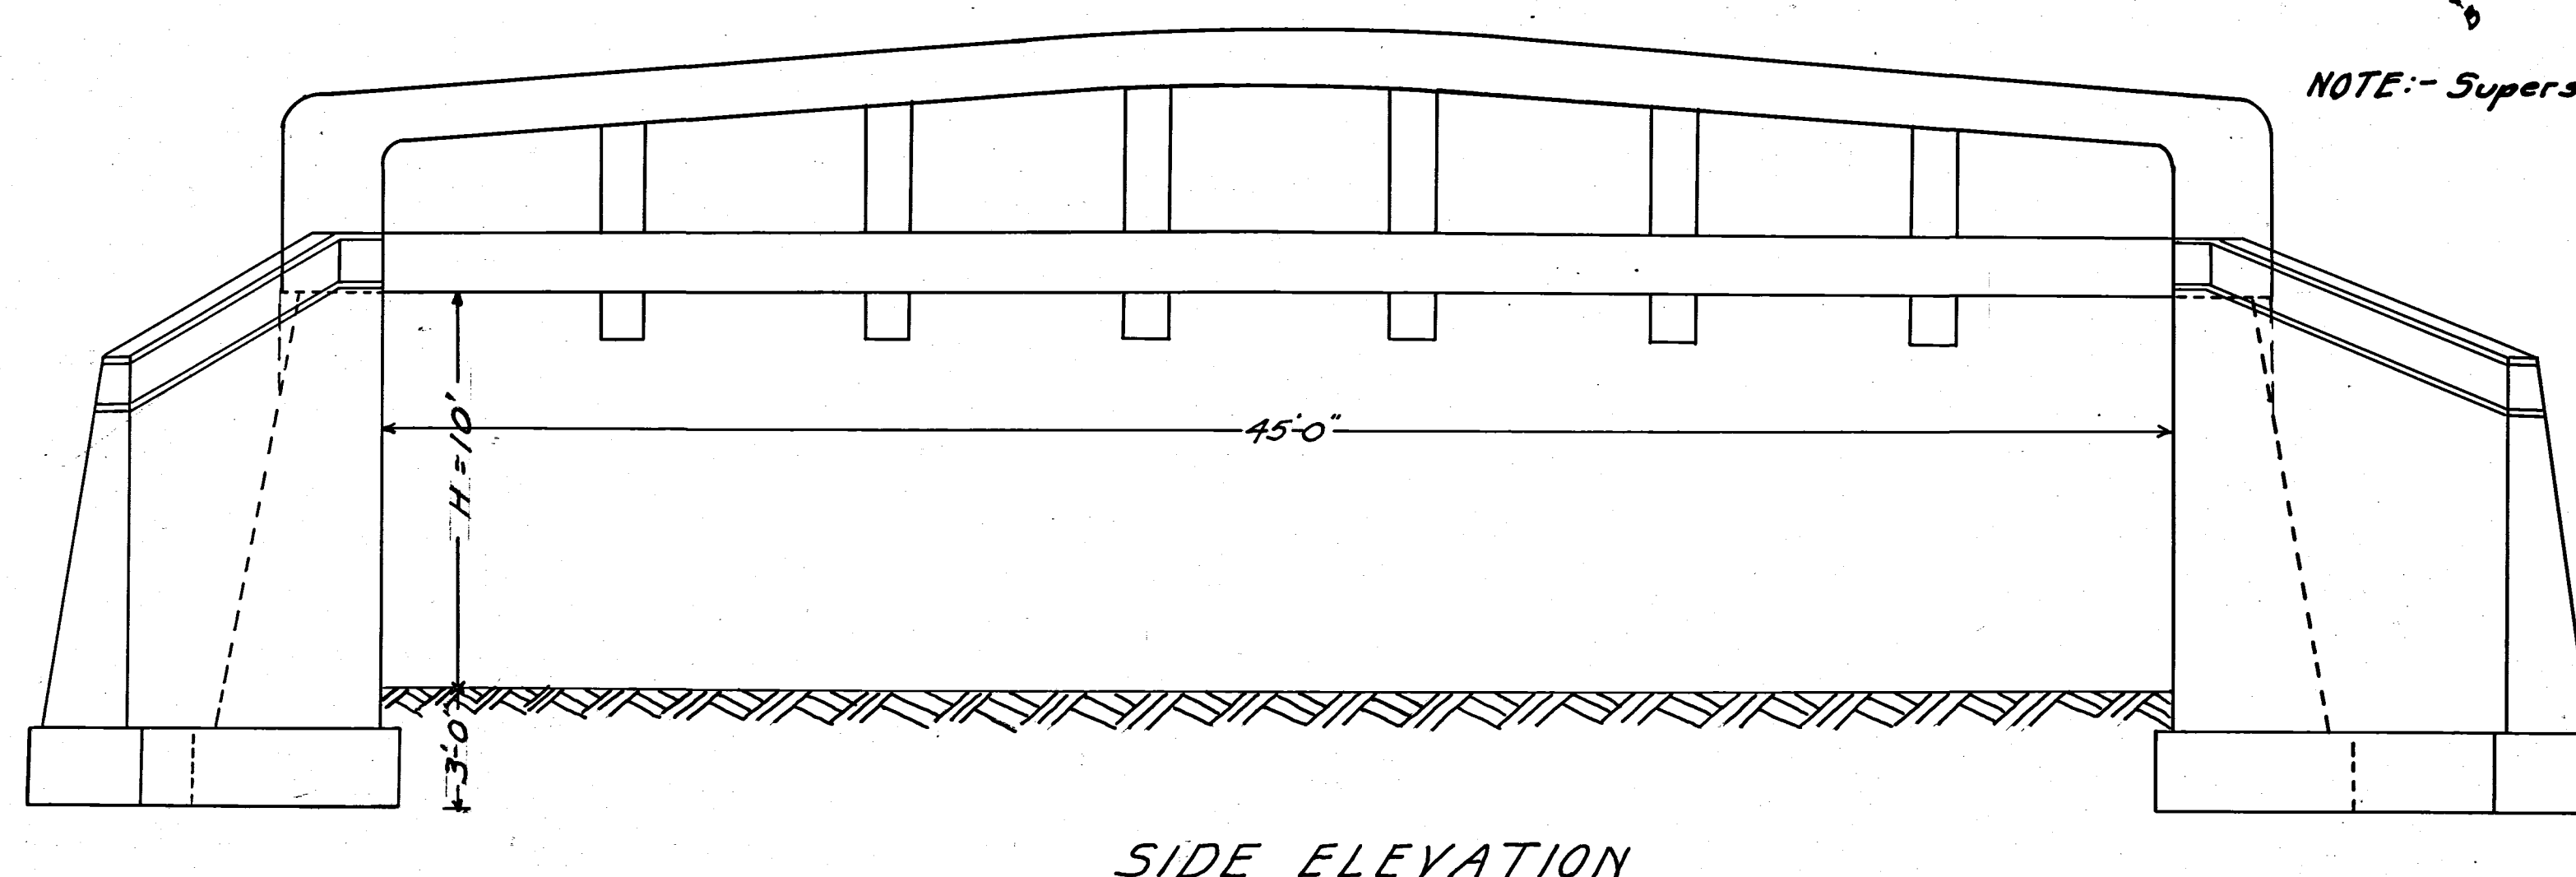

SUBSTRUCTURE
For
STANDARD
CONCRETE GIRDER BRIDGE - STATION 80+87
SPAN 45 FEET CLEAR ROADWAY 24 FEET
GRADE ELEV. 728.74 SCALE 1"= 4 FEET