

NOTE:- Bot Sta. 96+00 to 103+20
Place 720 Lin Feet of Guard Rail

Edge of Paving	Width	Station	Grade	Width	Edge of Paving
747.83	9.0	97+00	748.12	9.0	747.83
747.68	11.9	97+50	747.84	9.0	748.20
747.27	13.6	98+00	747.56	9.0	748.69
746.29	13.6	98+50	747.88	9.0	748.41
746.71	13.6	99+00	747.00	9.0	748.13
746.43	13.6	99+50	746.72	9.0	747.85
746.15	13.6	100+00	746.44	9.0	747.57
745.94	13.6	100+28.7	746.23	9.0	747.36
745.92	13.45	100+50	746.21	9.0	747.35
745.81	12.55	100+82.7	746.10	9.0	747.17
745.80	12.4	101+00	746.09	9.0	747.15
745.64	11.5	101+42.7	745.93	9.0	746.93
745.61	11.5	101+50	745.80	9.0	746.80
745.33	11.5	102+00	745.62	9.0	746.62
745.20	11.5	102+50	745.49	9.0	746.49
745.07	11.5	103+00	745.36	9.0	746.36
744.94	11.5	103+50	745.23	9.0	746.23
744.80	11.5	104+00	745.09	9.0	746.09
744.67	11.5	104+50	744.96	9.0	745.96
744.54	11.5	105+00	744.83	9.0	745.83
744.41	11.5	105+50	744.70	9.0	745.70
744.34	11.5	105+77.4	744.63	9.0	745.63
744.28	11.9	106+00	744.57	9.0	745.57
744.21	10.34	106+18.4	744.50	9.0	744.88
744.15	9.54	106+50	744.44	9.0	744.47
744.03	9.0	106+74.3	744.37	9.0	744.03

Extra Paving = 319.0 sq yds.

BM Spike in 30' Locust
20 on Left Sta.
100+50 Elev. 744.22


BM Spike in 40' Elm
25 Left Station
107+18 Elev. 741.45

BM 2 spikes in 50'
Willow 15' Left Sta.
111+95 Elev. 742.65

BM Cut N.W. Cor.
Curb Bridge Sta.
121+10 Elev. 744.83

RIGHT	LEFT
Edge of Paving	Edge of Paving
749.00 9.0	749.29 9.0
749.21 11.73	750.20 9.0
750.20 11.60	750.49 9.0
751.11 13.57	751.40 9.0
751.40 13.8	751.69 9.0
752.31 13.8	752.60 9.0
753.14 13.8	753.43 9.0
753.24 13.8	753.53 9.0
753.12 13.8	753.47 9.0
752.61 12.23	752.90 9.0
750.22 11.60	750.71 9.0
751.25 9.06	751.54 9.0
750.94 9.0	751.23 9.0

Extra Paving = 130.9 sq yds.

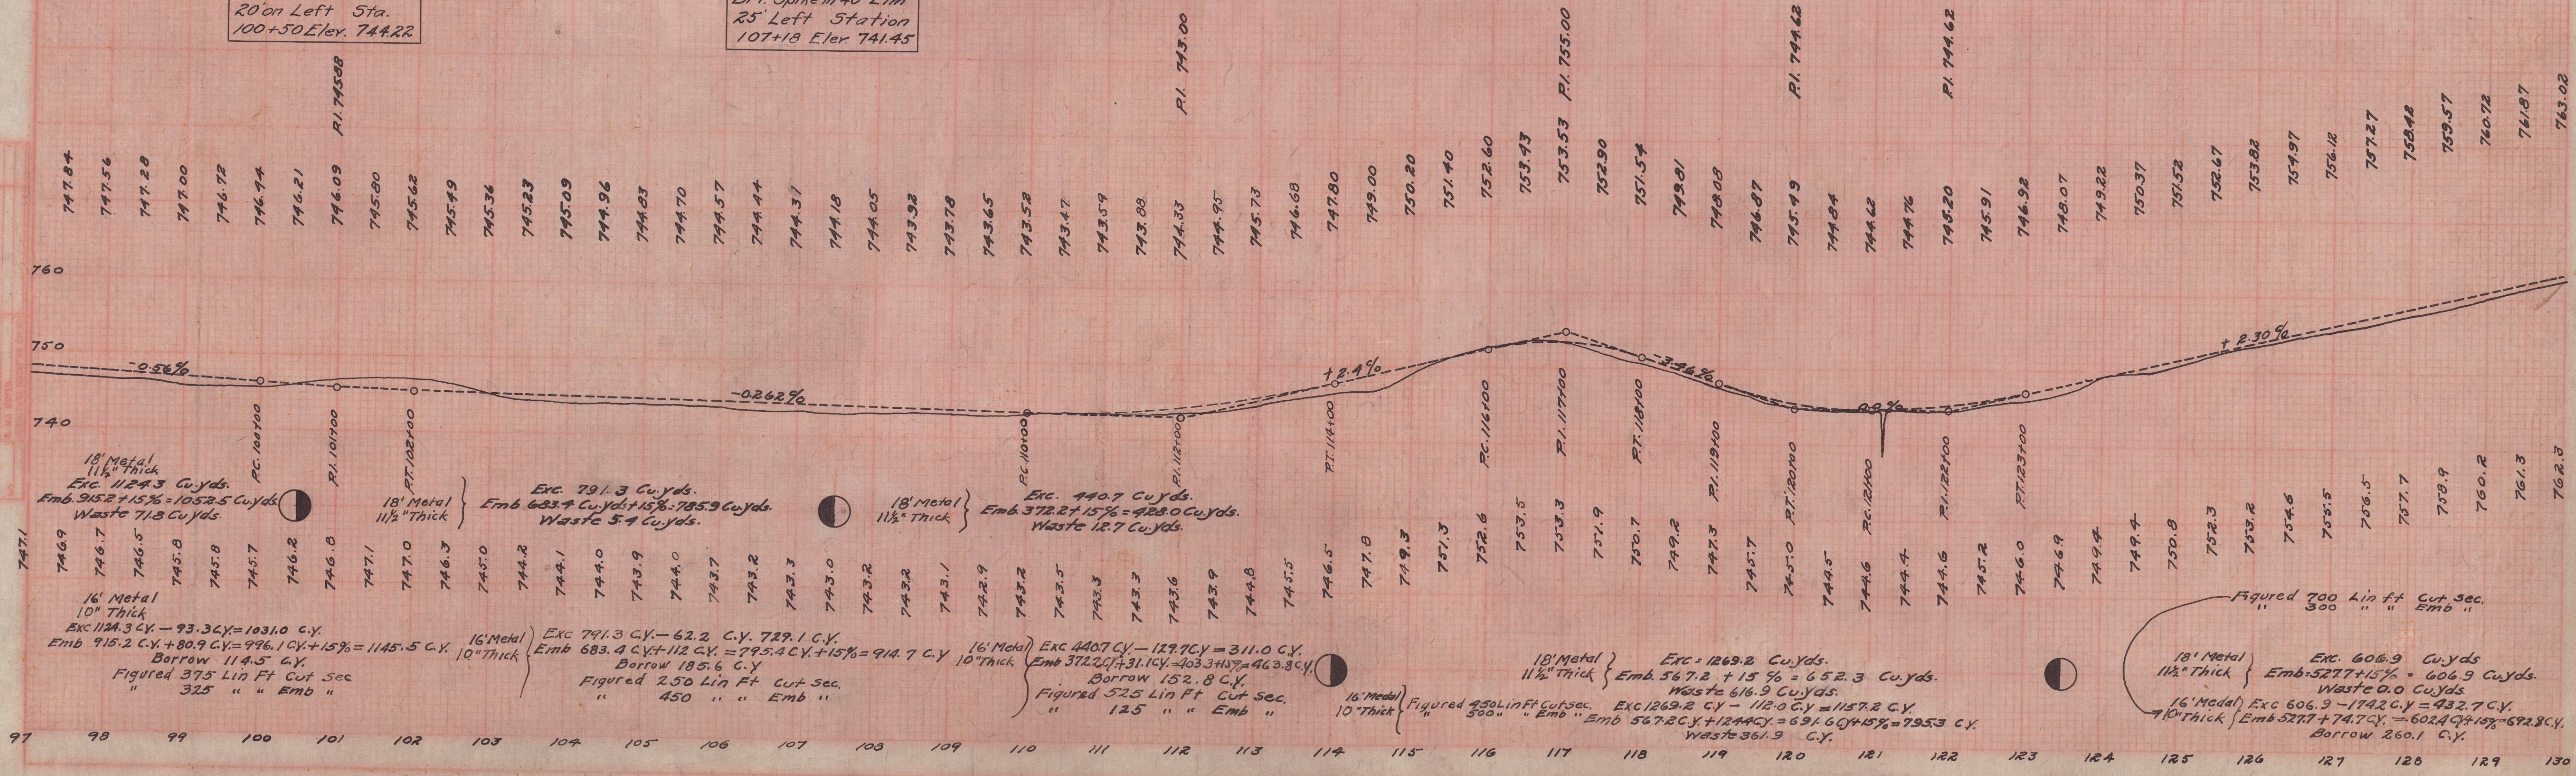

FED. RD. DIST. N°	STATE	FED. AID PROJECT	FISCAL YEAR
	OHIO		

I.C.H. N° 10 SEC. M'
MUSKINGUM COUNTY