


MUS-CO.
TWP. ROAD 47
CO. ROAD 60

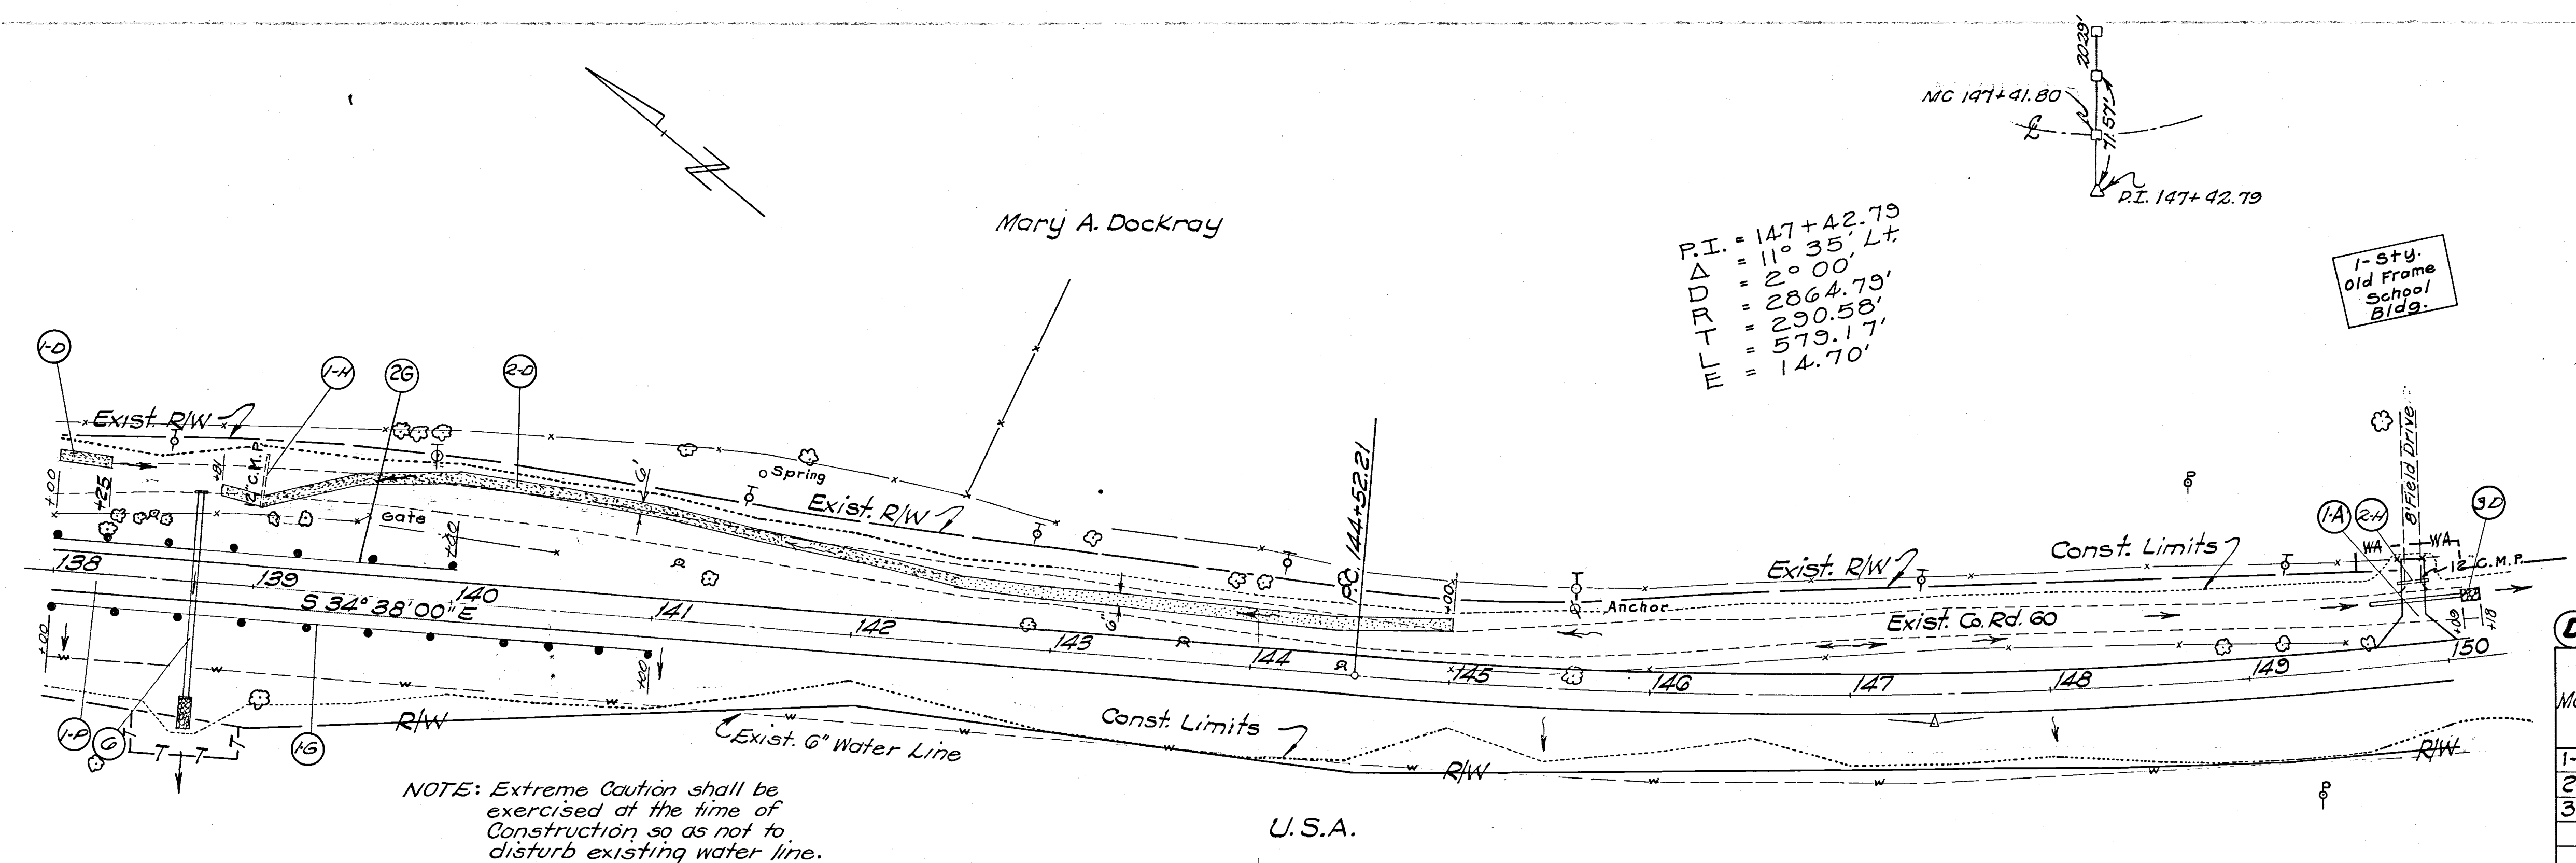

⑥ GUARD RAIL

Mark	Station		Side	606 Guard Rail Type 4 Lin. Ft.
	From	To		
1-G	138+00	141+00	Rt.	300
2-G	138+00	140+00	Lt.	200
Totals				500

⑦ DITCHES

Mark	Station		Side	600 Sodding Sq.Yds.	601 Dump Rock Chan. Prot. Cu.Yds.
	From	To			
1-D	138+00	138+25	Lt.	17	
2-D	138+81	145+00	Lt.	420	
3-D	150+09	150+18	Lt.		3
Totals				437	3

⑧ PAVEMENT

Mark	Station		404 Asphalt Concrete Cu.Yds.	402 Asphalt Concrete Cu.Yds.	304 Aggregate Base Cu.Yds.	310 Subbase Cu.Yds.	605 Aggregate Drain Lin. Ft.	203 Subgrade Prep Sq.Yds.	408 Bit Prime Coat Gal's.
	From	To							
1-P	138+00	150+00	92.5	111.2	467	326	564	2667	1067

⑨ DRIVES & APPROACHES

Mark	Station	Type	Side	404 Asphalt Concrete Cu.Yds.	304 Aggregate Base Cu.Yds.	408 Prime Coat Gal's.	603 Cond. Type D Lin. Ft.	Details on Sheet.
1-A	149+83	Field	Lt.		14		46	48

STRUCTURES 20 SPAN & UNDER

Str. No.	S.L.M. Station	Proposed			Details on Sheet
		Type	Size	Length	
6	138+70	P.C.	30"	104'	69

⑩ PIPE REMOVED

Mark	Station	Side	202 Pipe Removed Lin. Ft.	
			15' Und. Over 15'	
1-H	139+02	Lt.	26	
2-H	149+79	Lt.	16	
Totals			42	

