


MUS-CO.
TWP. ROAD 47
CO. ROAD 60

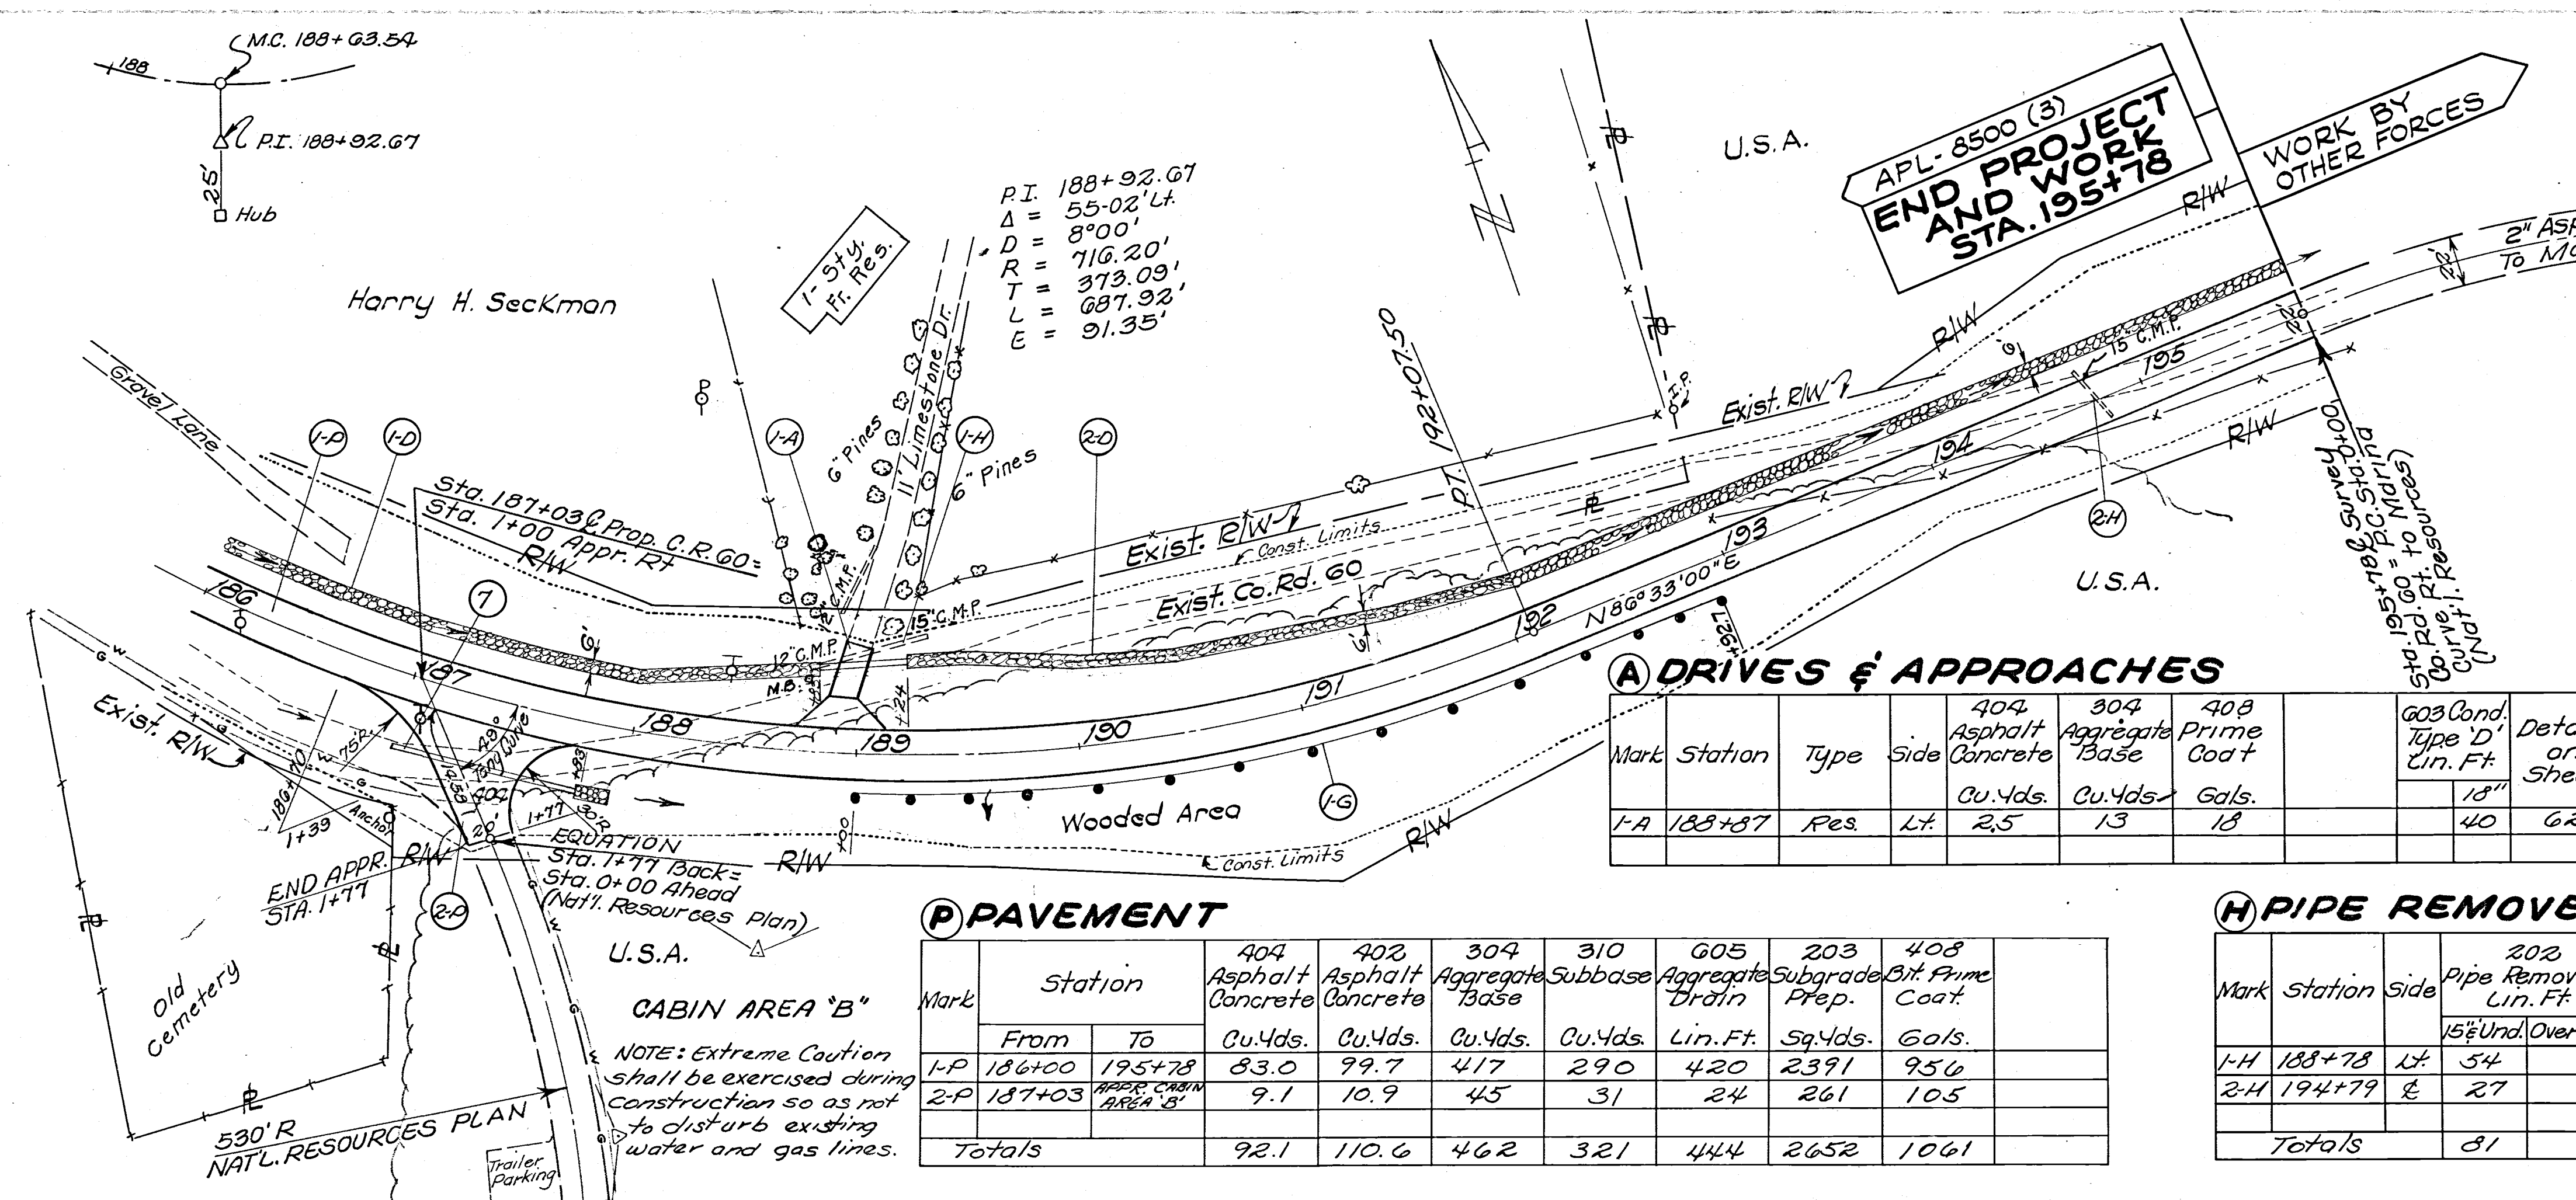

NAT'L. RESOURCES
CURVE DATA
 $\Delta = 119^\circ 15' 51''$ Rt.
 $R = 493.22'$
 $T = 841.76'$
 $L = 1029.13'$
 $E = 482.40'$

GUARD RAIL

Mark	Station		Side	GOG Guard Rail Type 4 Lin. Ft.
	From	To		
1-G	189+00	192+92.7	Rt.	400

DITCHES

Mark	Station		Side	GOG Sodding Sq.Yds.	GOG Dump Road Chn. Prot. Cu.Yds.
	From	To			
1-D	186+00	188+83	Lt.		125
2-D	189+24	195+78	Lt.		215
Totals					340

DRIVES & APPROACHES

Mark	Station	Type	Side	404 Asphalt Concrete	304 Aggregate Base	408 Prime Coat	GOG Cond. Type D Lin. Ft.	Details on Sheet
				Cu.Yds.	Cu.Yds.	Gals.		
1-A	188+87	Res.	Lt.	2.5	13	18	40	62

PAVEMENT

Mark	Station		404 Asphalt Concrete	408 Asphalt Concrete	304 Aggregate Base	310 Subbase	605 Aggregate Drain	203 Subgrade Prep.	408 Bit. Prime Coat
	From	To	Cu.Yds.	Cu.Yds.	Cu.Yds.	Cu.Yds.	Lin. Ft.	Sq.Yds.	Gals.
1-P	186+00	195+78	83.0	99.7	417	290	420	2391	956
2-P	187+03	195+78	9.1	10.9	45	31	24	261	105
Totals			92.1	110.6	462	321	444	2652	1061

PIPE REMOVED

Mark	Station	Side	202 Pipe Removed Lin. Ft.
			15" Und. Over 15"
1-H	188+78	Lt.	54
2-H	194+79	Rt.	27
Totals			81

STRUCTURES 20' SPAN & UNDER

Str. No	Station	Proposed			Details on Sheet
		Type	Size	Length	
7	APPR. STA. 1+40.00	PC.	12"	84'	62

