

STRUCTURES 20' SPAN & UNDER

Str. No.	S.L.M.	Station	Proposed			Details on Sheet
			Type	Size	Length	
3		90+00	R.C.	15"	56'	28

(H) PIPE REMOVED

Mark	Station	Side	202 Pipe Removed Lin. Ft.	
1-H	79+30	Rt.	16	
2-H	89+29	Lt.	30	
Totals			46	

(D) DITCHES


Mark	Station		Side	660 Sodding Sq. Yds.	601 Dump Rock Chan. Prot. Cu. Yds.	
	From	To				
1D	78+00	79+02	Rt.	67		
2D	79+47	82+00	Rt.	169	3	
3D	78+00	78+50	Lt.	33		
4D	79+35	82+00	Rt.		54	
5D	82+00	82+00	Lt.	165		
6D	85+00	89+90	Lt.	293	17	
Totals				727	74	

(G) GUARD RAIL

Mark	Station		Side	606 Guard Rail Type 4 Lin. Ft.	
	From	To			
1-G	89+50	90+00	Rt.	50	
Totals					

Seeding *12120 Sq. Yds.
Excavation 16820 Cu. Yds.
Embankment 2667 Cu. Yds.

B.M. R.R. Sp. S. Root 40' OdK
11.7 Rt. Sta. 83+47 El. 900.33

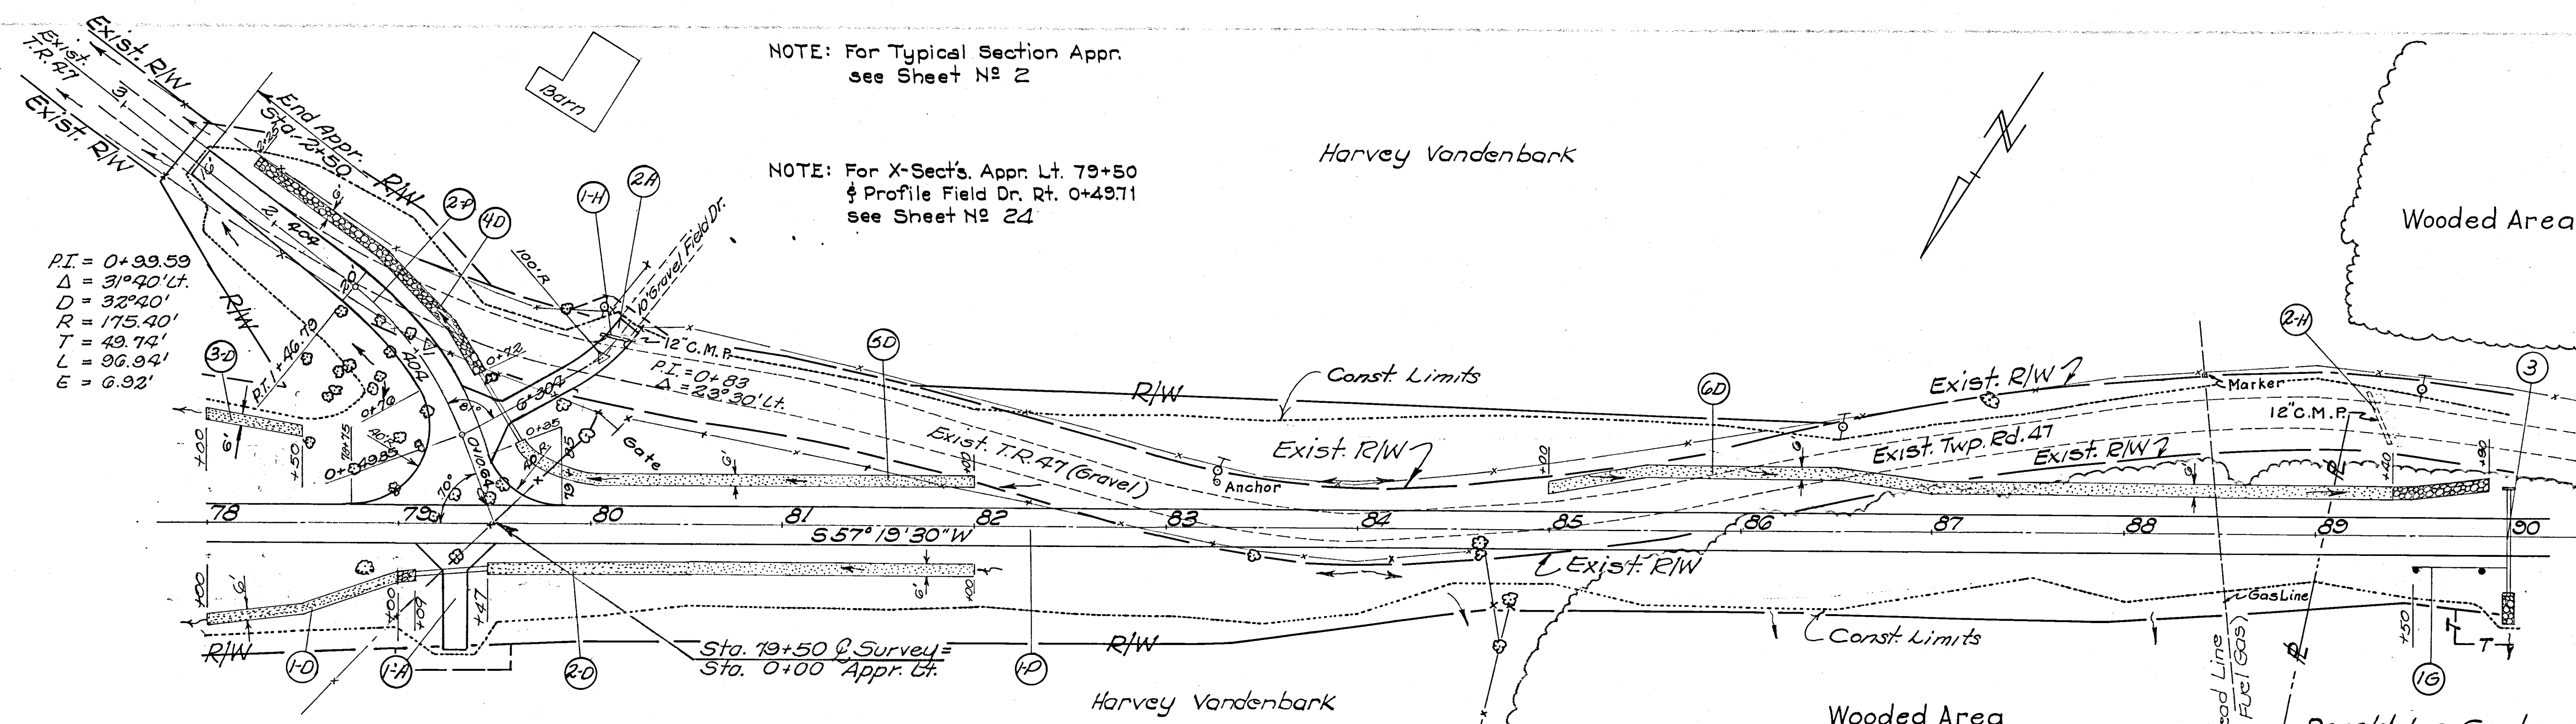

(P) PAVEMENT

Mark	Station		404 Asphalt Concrete Cu. Yds.	402 Asphalt Concrete Cu. Yds.	304 Aggregate Base Cu. Yds.	310 Subbase Cu. Yds.	605 Aggregate Drains Lin. Ft.	203 Subgrade Prep Sq. Yds.	408 Bit. Prime Coat Gals.
	From	To							
1-P	78+00	90+00	92.5	111.2	467	326	552	2667	1067
2-P	Twp. Rd. 47 Sta. 79+50		21.1	35.4	106	74	120	608	243
Totals			113.6	136.6	573	400	672	3275	1310

(A) DRIVES & APPROACHES

Mark	Station	Type	Side	404 Asphalt Concrete Cu. Yds.	304 Aggregate Base Cu. Yds.	408 Prime Coat Gals.	603 Cond Type D Lin. Ft.	603 Cond Type D 70702 or 70702 Lin. Ft.	Details on Sheet
1-A	79+30	Field	Rt.		17		38	12	23
2-A	Appro. Sta. 82+42.71	Field	Rt.		25			40	24
Totals					42		38	40	

