


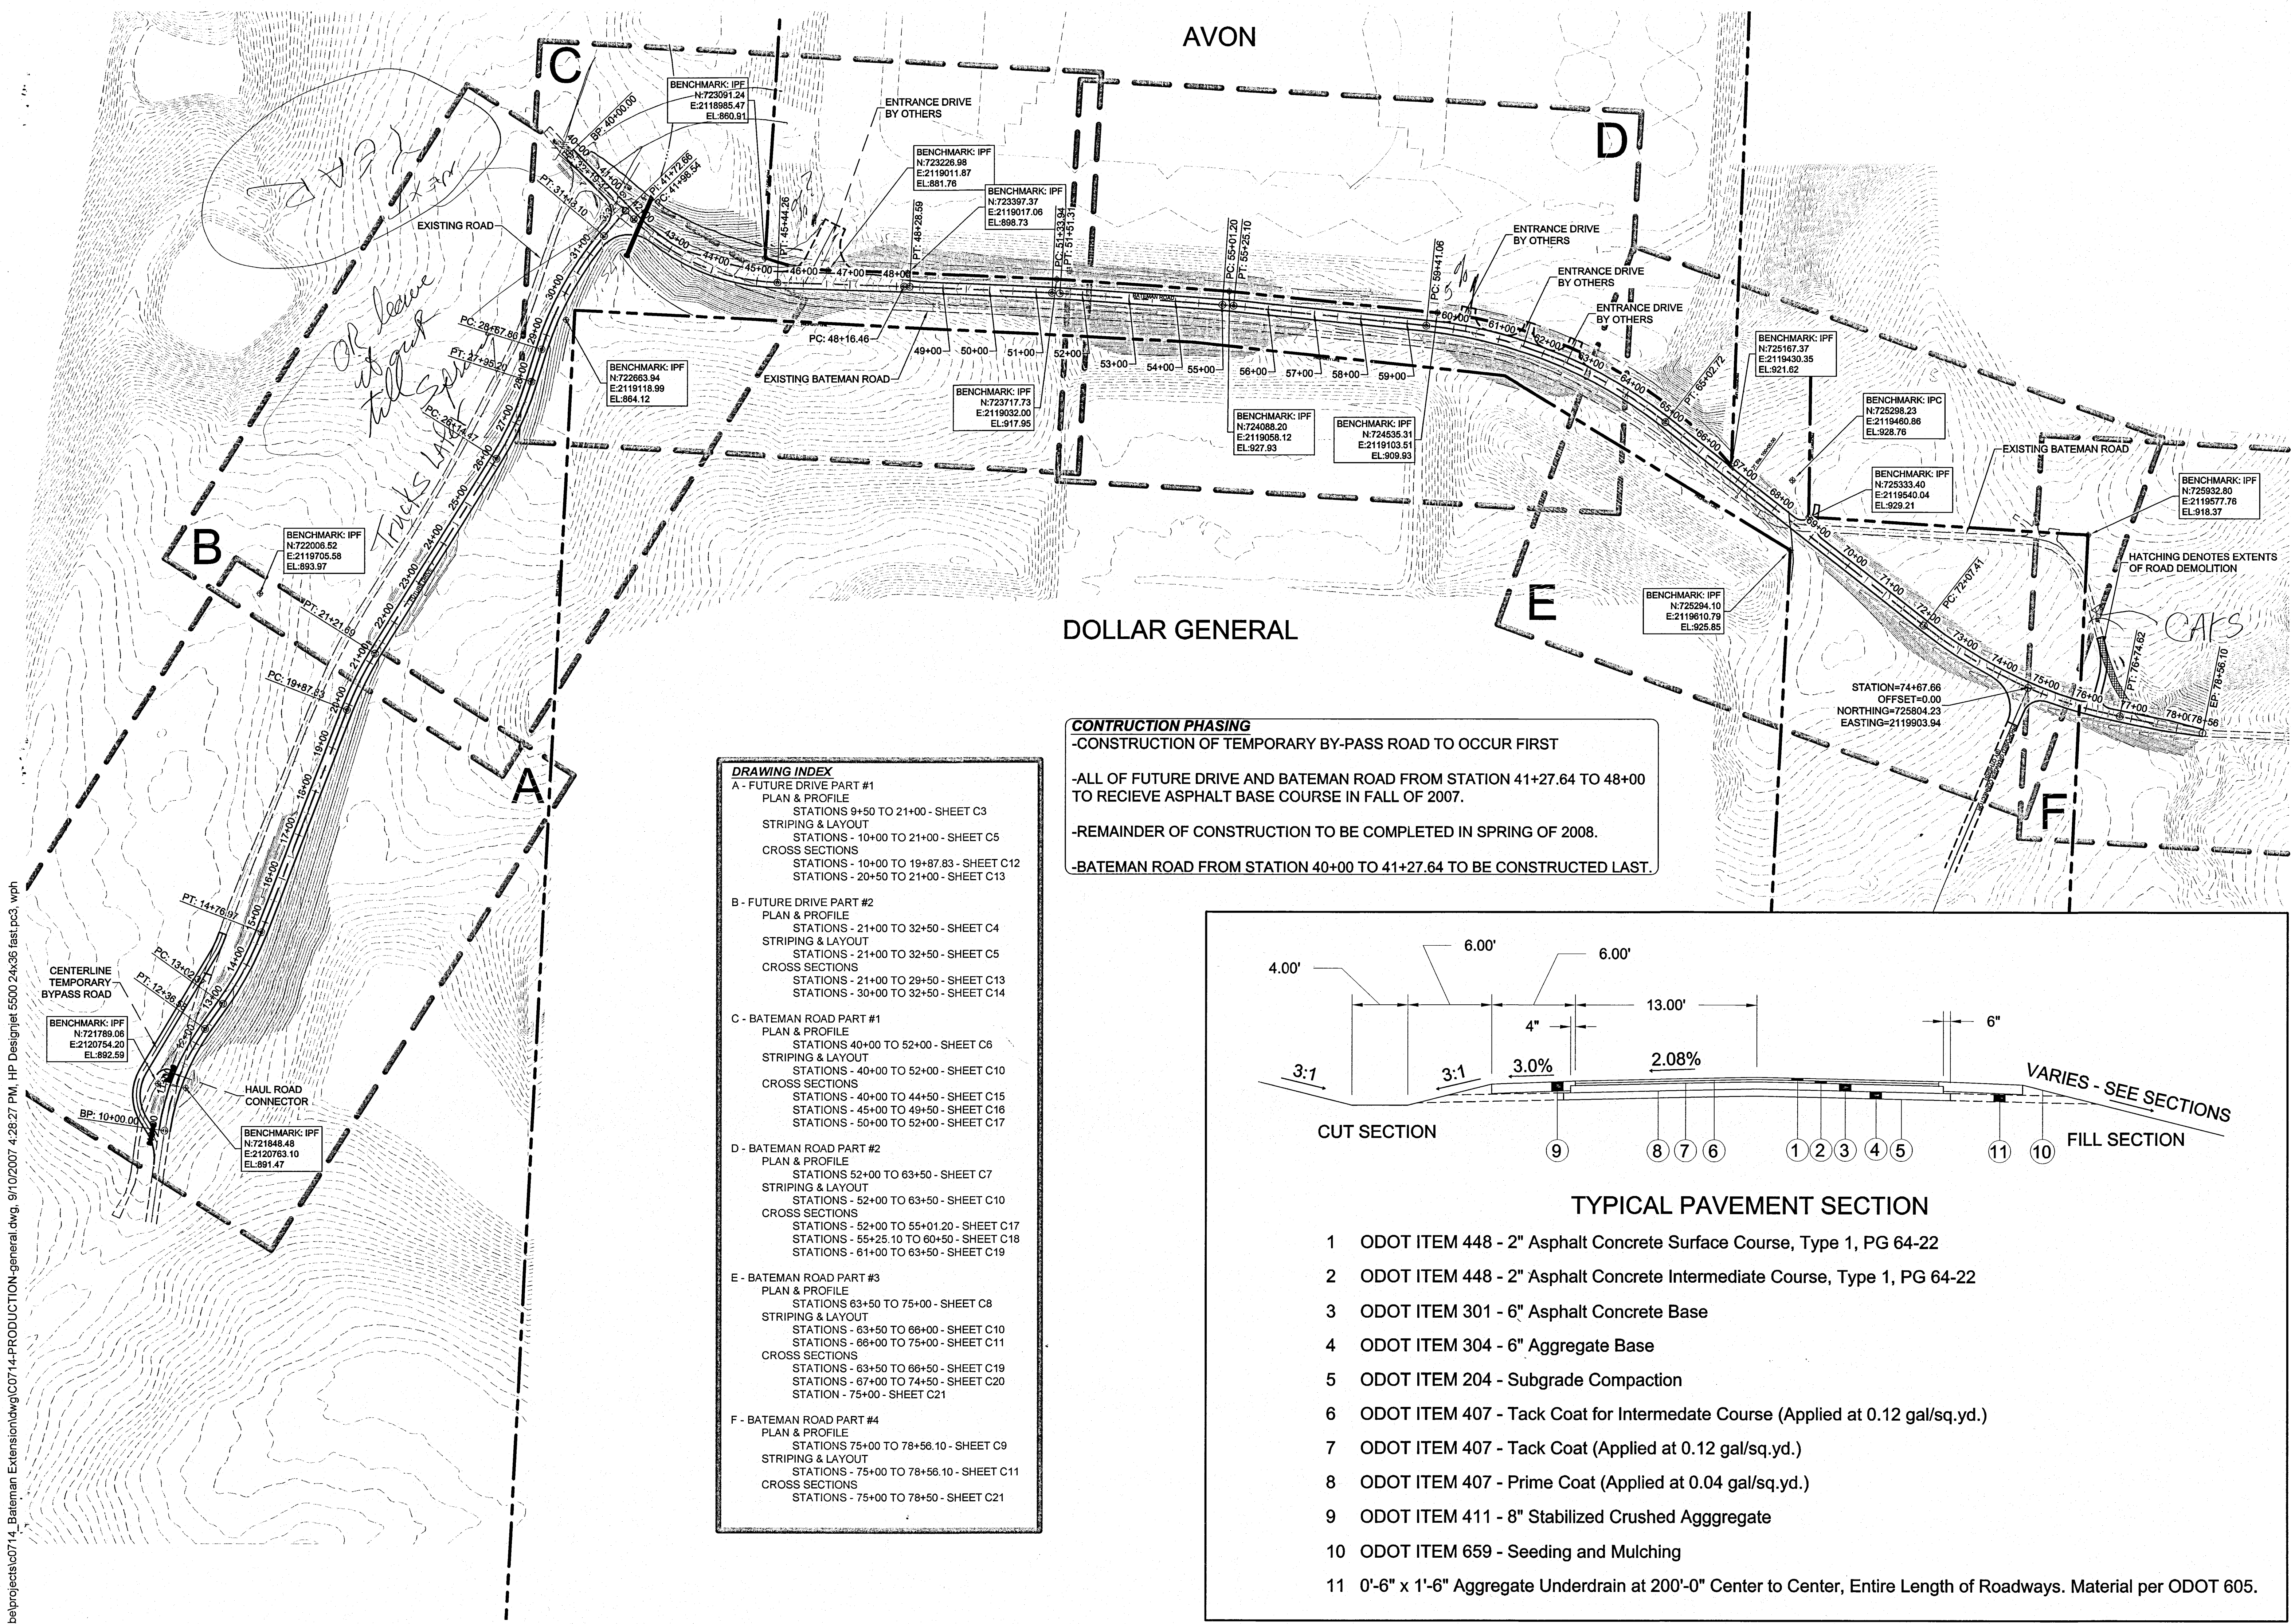

DRAWING INDEX


A - FUTURE DRIVE PART #1
PLAN & PROFILE STATIONS 9+50 TO 21+00 - SHEET C3
STRIPING & LAYOUT STATIONS - 10+00 TO 21+00 - SHEET C5
CROSS SECTIONS STATIONS - 10+00 TO 19+87.83 - SHEET C12 STATIONS - 20+50 TO 21+00 - SHEET C13
B - FUTURE DRIVE PART #2
PLAN & PROFILE STATIONS - 21+00 TO 32+50 - SHEET C4
STRIPING & LAYOUT STATIONS - 21+00 TO 32+50 - SHEET C5
CROSS SECTIONS STATIONS - 21+00 TO 29+50 - SHEET C13 STATIONS - 30+00 TO 32+50 - SHEET C14
C - BATEMAN ROAD PART #1
PLAN & PROFILE STATIONS 40+00 TO 52+00 - SHEET C6
STRIPING & LAYOUT STATIONS - 40+00 TO 52+00 - SHEET C10
CROSS SECTIONS STATIONS - 40+00 TO 44+50 - SHEET C15 STATIONS - 45+00 TO 49+50 - SHEET C16 STATIONS - 50+00 TO 52+00 - SHEET C17
D - BATEMAN ROAD PART #2
PLAN & PROFILE STATIONS 52+00 TO 63+50 - SHEET C7
STRIPING & LAYOUT STATIONS - 52+00 TO 63+50 - SHEET C10
CROSS SECTIONS STATIONS - 52+00 TO 55+01.20 - SHEET C17 STATIONS - 55+25.10 TO 60+50 - SHEET C18 STATIONS - 61+00 TO 63+50 - SHEET C19
E - BATEMAN ROAD PART #3
PLAN & PROFILE STATIONS 63+50 TO 75+00 - SHEET C8
STRIPING & LAYOUT STATIONS - 63+50 TO 66+00 - SHEET C10 STATIONS - 66+00 TO 75+00 - SHEET C11
CROSS SECTIONS STATIONS - 63+50 TO 66+50 - SHEET C19 STATIONS - 67+00 TO 74+50 - SHEET C20 STATION - 75+00 - SHEET C21
F - BATEMAN ROAD PART #4
PLAN & PROFILE STATIONS 75+00 TO 78+56.10 - SHEET C9
STRIPING & LAYOUT STATIONS - 75+00 TO 78+56.10 - SHEET C11
CROSS SECTIONS STATIONS - 75+00 TO 78+50 - SHEET C21

CONSTRUCTION PHASING
-CONSTRUCTION OF TEMPORARY BY-PASS ROAD TO OCCUR FIRST

-ALL OF FUTURE DRIVE AND BATEMAN ROAD FROM STATION 41+27.64 TO 48+00 TO RECIEVE ASPHALT BASE COURSE IN FALL OF 2007.

-REMAINDER OF CONSTRUCTION TO BE COMPLETED IN SPRING OF 2008.

-BATEMAN ROAD FROM STATION 40+00 TO 41+27.64 TO BE CONSTRUCTED LAST.

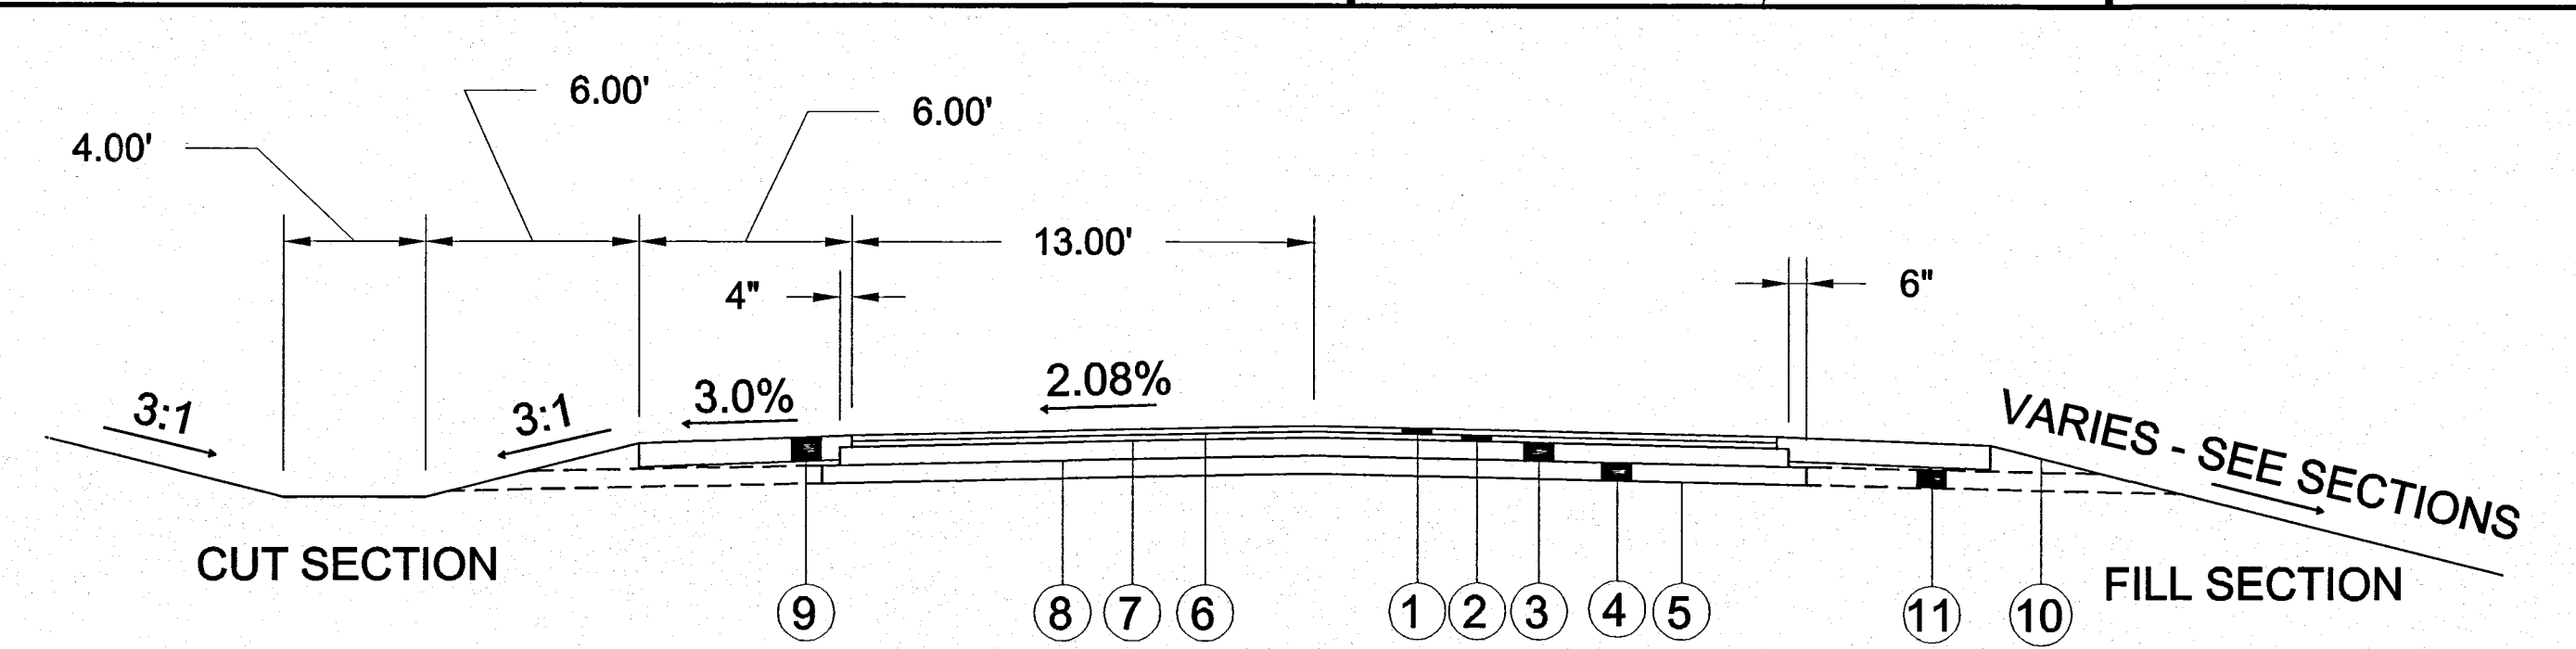

- TYPICAL PAVEMENT SECTION**
- 1 ODOT ITEM 448 - 2" Asphalt Concrete Surface Course, Type 1, PG 64-22
 - 2 ODOT ITEM 448 - 2" Asphalt Concrete Intermediate Course, Type 1, PG 64-22
 - 3 ODOT ITEM 301 - 6" Asphalt Concrete Base
 - 4 ODOT ITEM 304 - 6" Aggregate Base
 - 5 ODOT ITEM 204 - Subgrade Compaction
 - 6 ODOT ITEM 407 - Tack Coat for Intermediate Course (Applied at 0.12 gal/sq.yd.)
 - 7 ODOT ITEM 407 - Tack Coat (Applied at 0.12 gal/sq.yd.)
 - 8 ODOT ITEM 407 - Prime Coat (Applied at 0.04 gal/sq.yd.)
 - 9 ODOT ITEM 411 - 8" Stabilized Crushed Aggregate
 - 10 ODOT ITEM 659 - Seeding and Mulching
 - 11 0'-6" x 1'-6" Aggregate Underdrain at 200'-0" Center to Center, Entire Length of Roadways. Material per ODOT 605.