



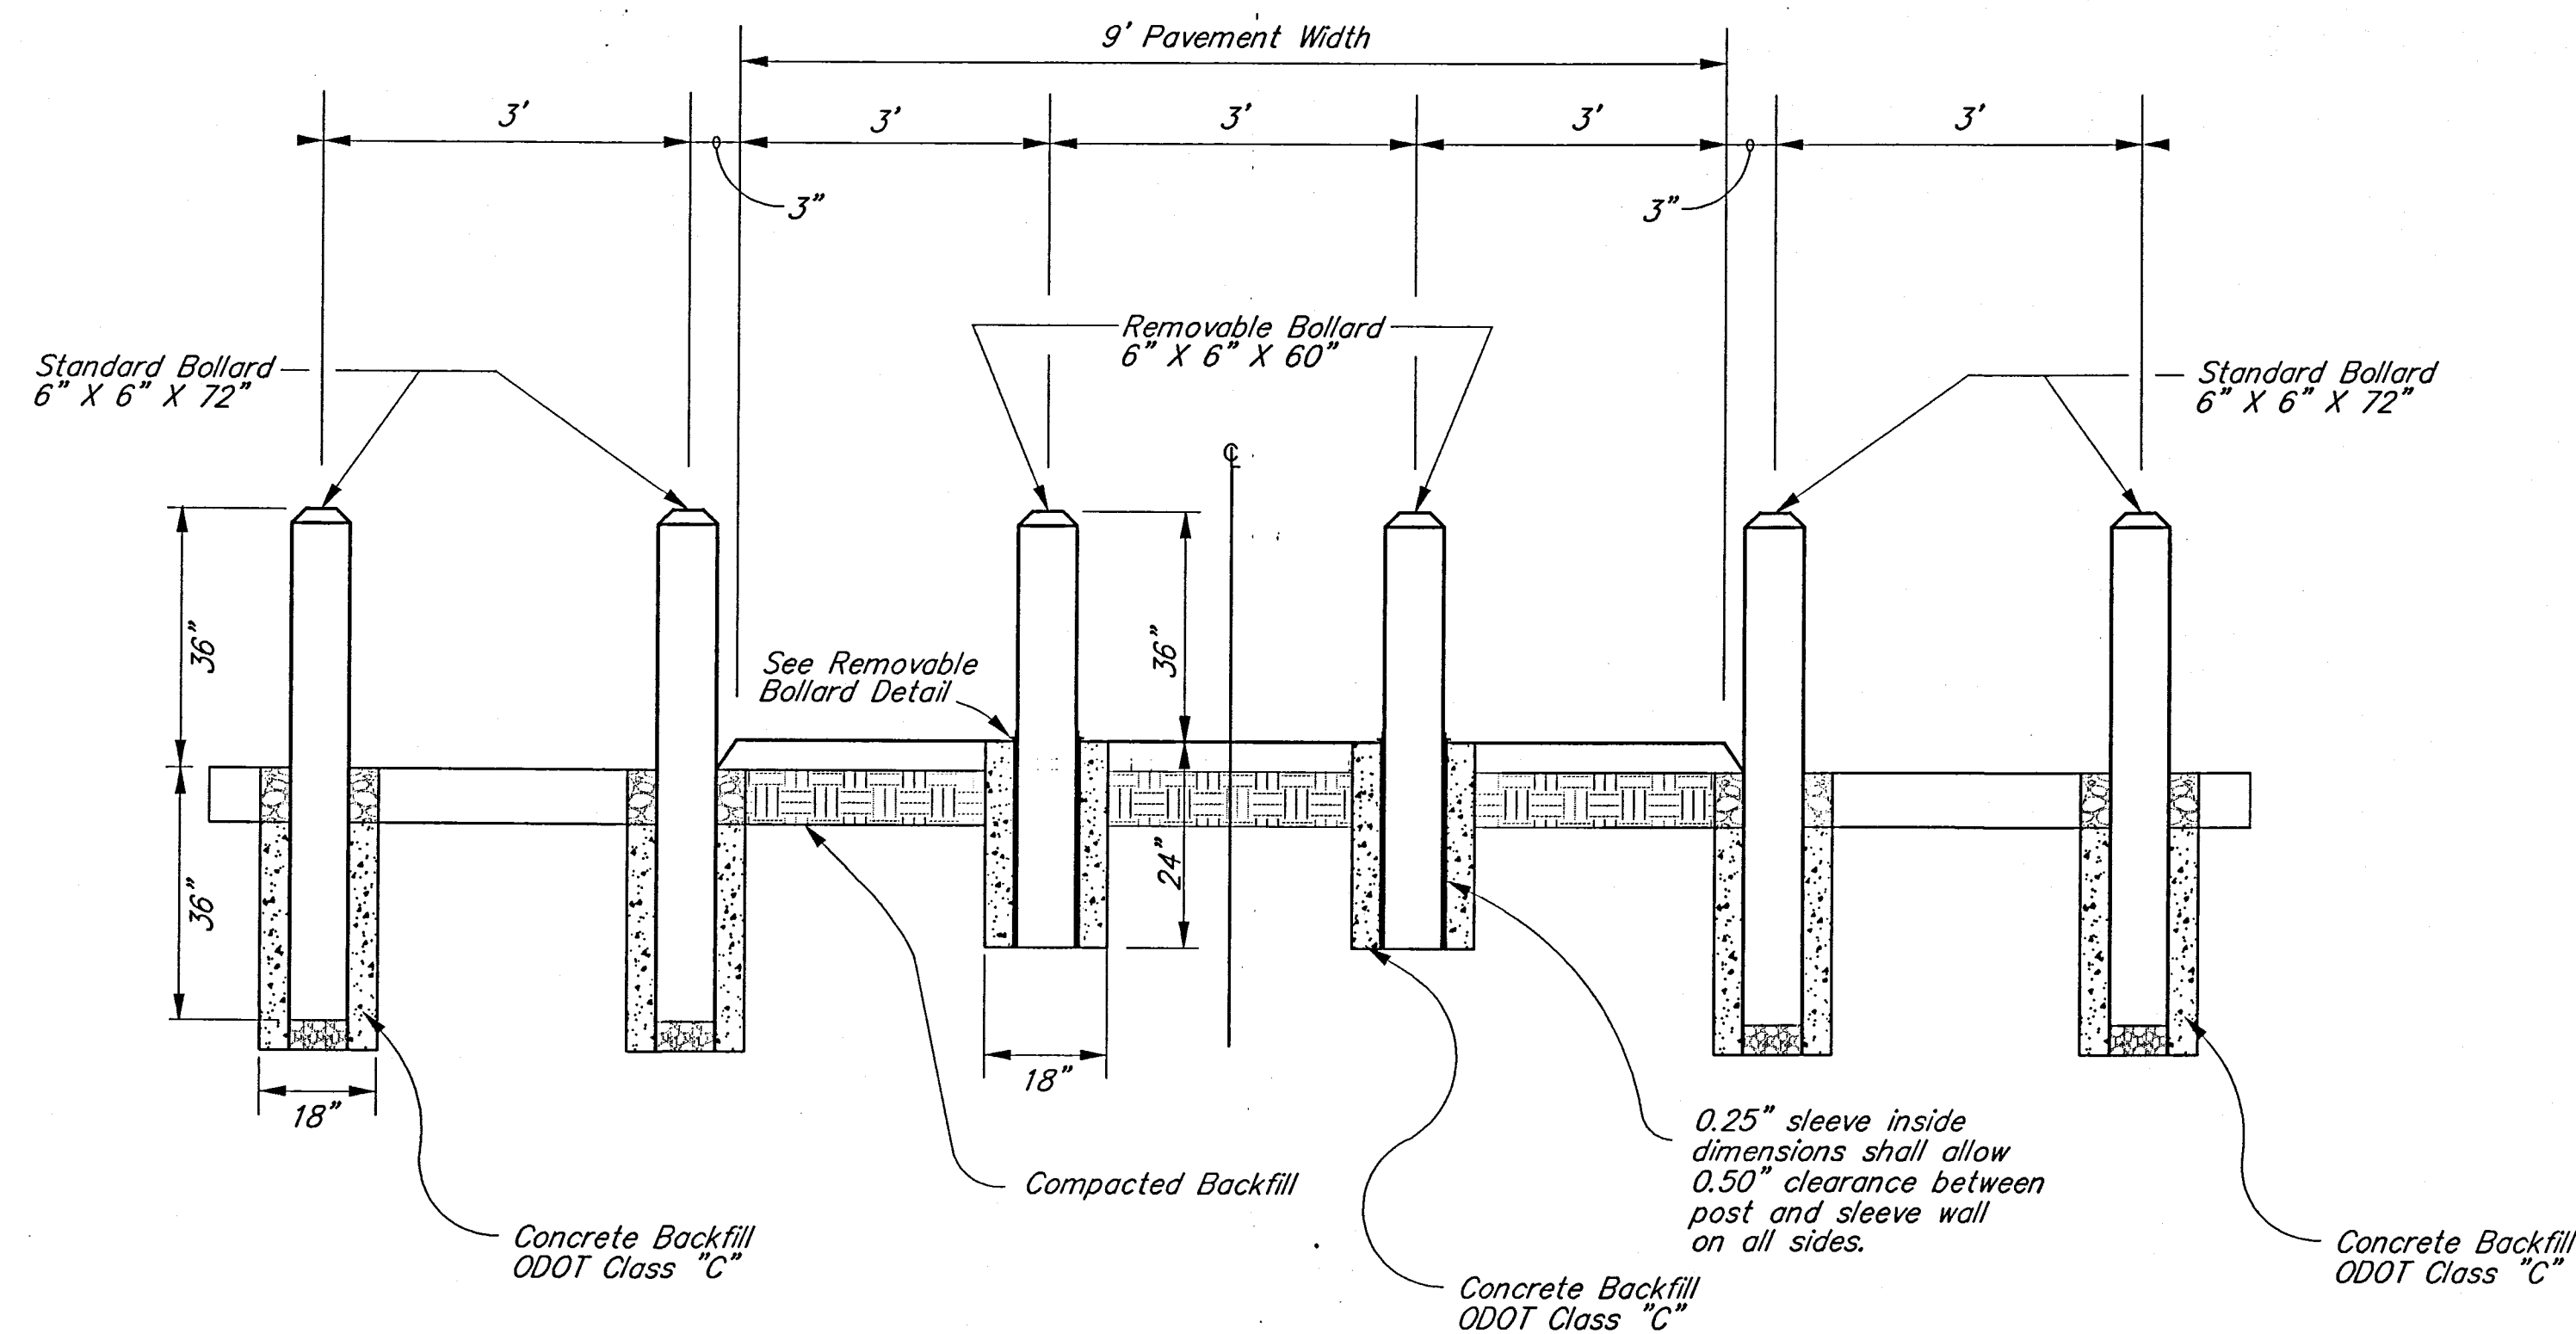


NOTES


1. All timbers are to be treated with A.W.P.I. L.P. 22 (Wolman salts or equal) and have retention of 40 P.S.F.
2. The Contractor shall install the Earthen Backfill in 6" Lifts and take care to Plumb each Post.
3. The sleeve, angle iron and anchor rods shall be painted with 2 coats of Rust-Oleum No. 769 Damp-proof red primer or equal prior to installation.

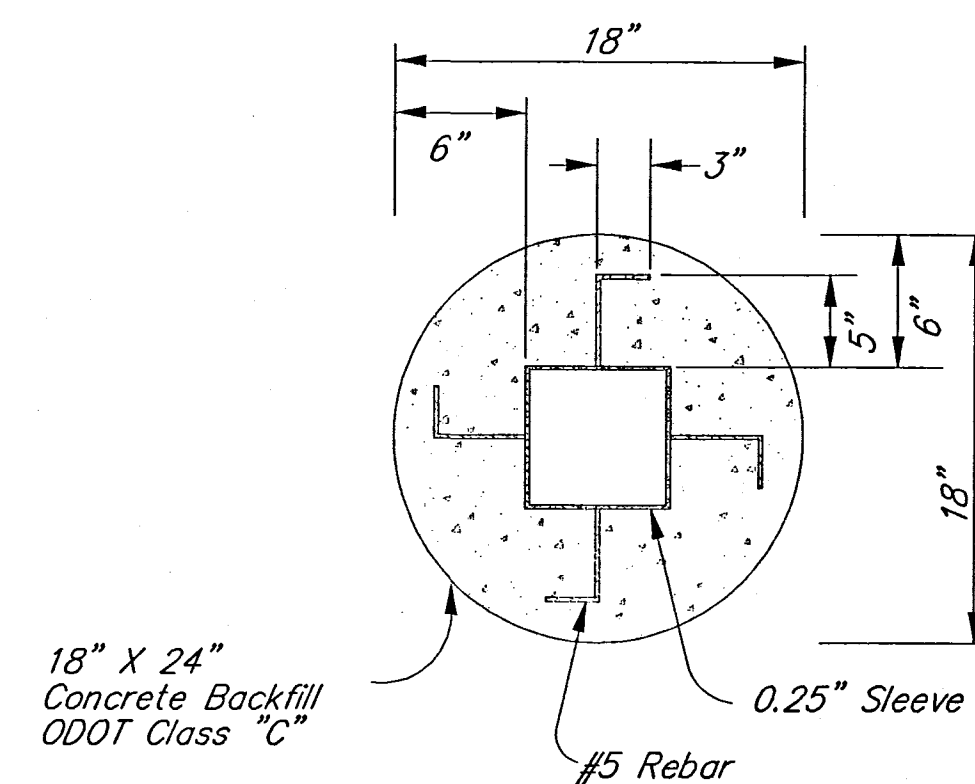

REMOVABLE BOLLARD FOOTER DETAIL

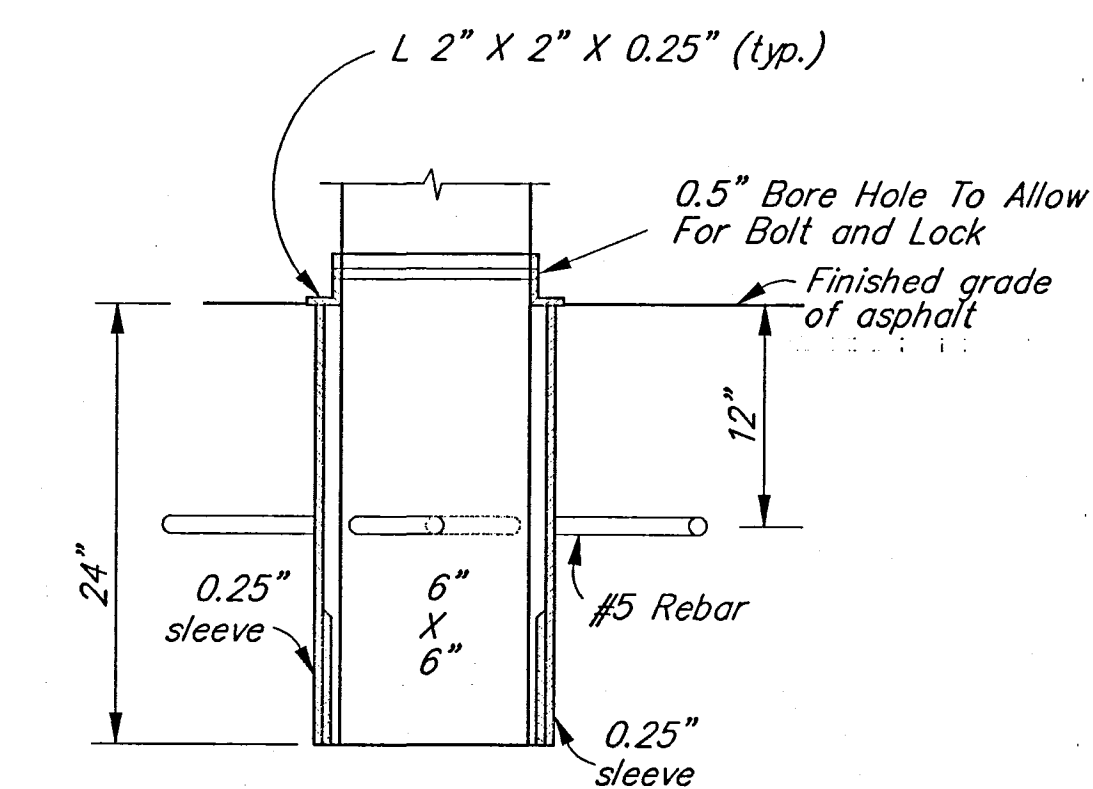

REMOVABLE BOLLARD DETAIL

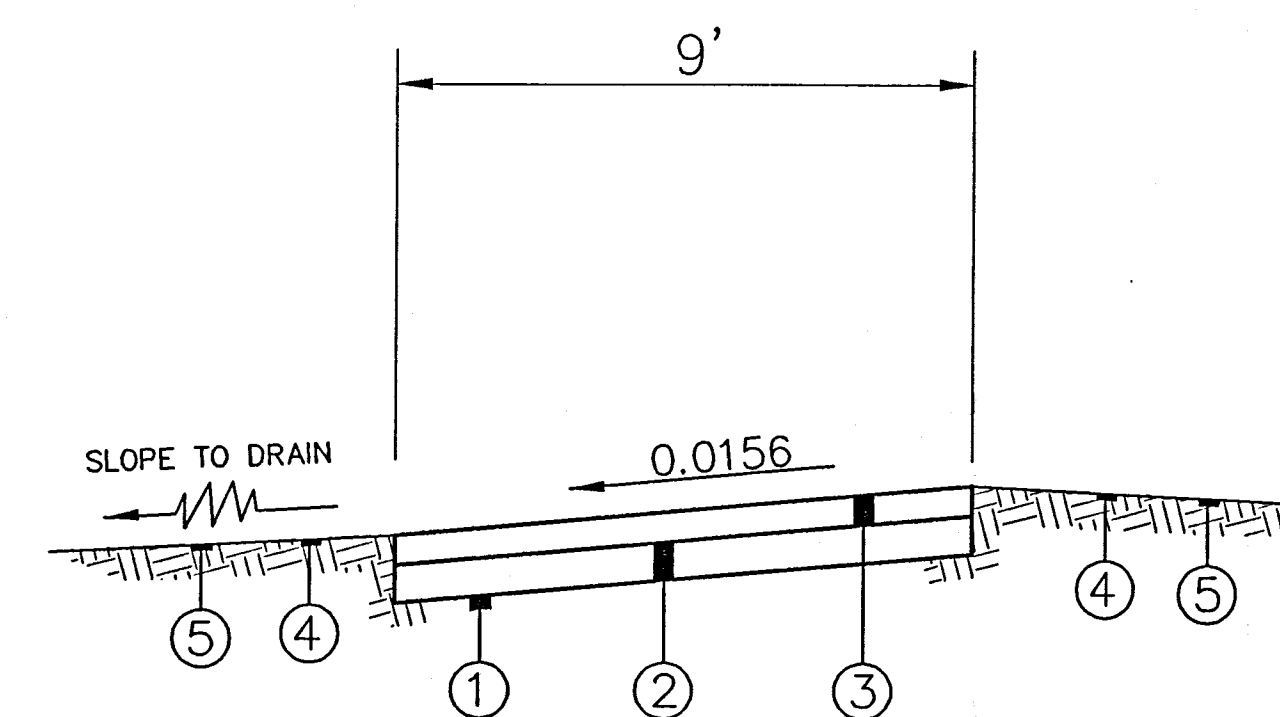


- ① ITEM 203 - SUBGRADE COMPACTION
- ② ITEM 301 - 3" BITUMINOUS AGGREGATE BASE, PG64-22
- ③ ITEM 448 - 2" ASPHALT SURFACE COURSE TYPE I, PG64-22
- ④ ITEM 203 - LINEAR GRADING
- ⑤ ITEN 659 - SEEDING & MULCHING

TYPICAL PAVEMENT

STA. 433+07.31 TO STA. 449+56.00
STA. 454+88.00 TO STA. 464+88.00

TYPICAL PAVEMENT SECTIONS / DETAILS

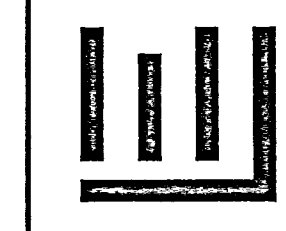

Linn Engineering, Inc.
Civil Engineering Consultants
P.O. Box 2086 Zanesville, Ohio 43702-2086
740-452-7434

MUSKINGUM RECREATIONAL TRAIL
ZANESVILLE, OHIO
ELLIS BRIDGE RESTORATION
TYPICAL PAVEMENT SECTIONS/ DETAILS

Project No.	Sheet No.	Of
MRT-8808	4	6