


ESTIMATED QUANTITIES

ITEM 603	30" Conduit Type "A" (706.02 Class III or 706.00) with C.I. "B" Bedding	150 L.F.
ITEM 601	Dumped Rock Channel Protection	9 C.Y.
ITEM 601	Riprap, Using 6" Reinforced Concrete Slab as per Plan	33 S.Y.
ITEM 660	Sodding	7 S.Y.
ITEM 602	Masonry	352 C.Y.

Drainage Area = 21 Ac.
Q₂₅ = 44 c.f.s.

Note:
Reference made to Standard
Drawings MC-4 HW-E

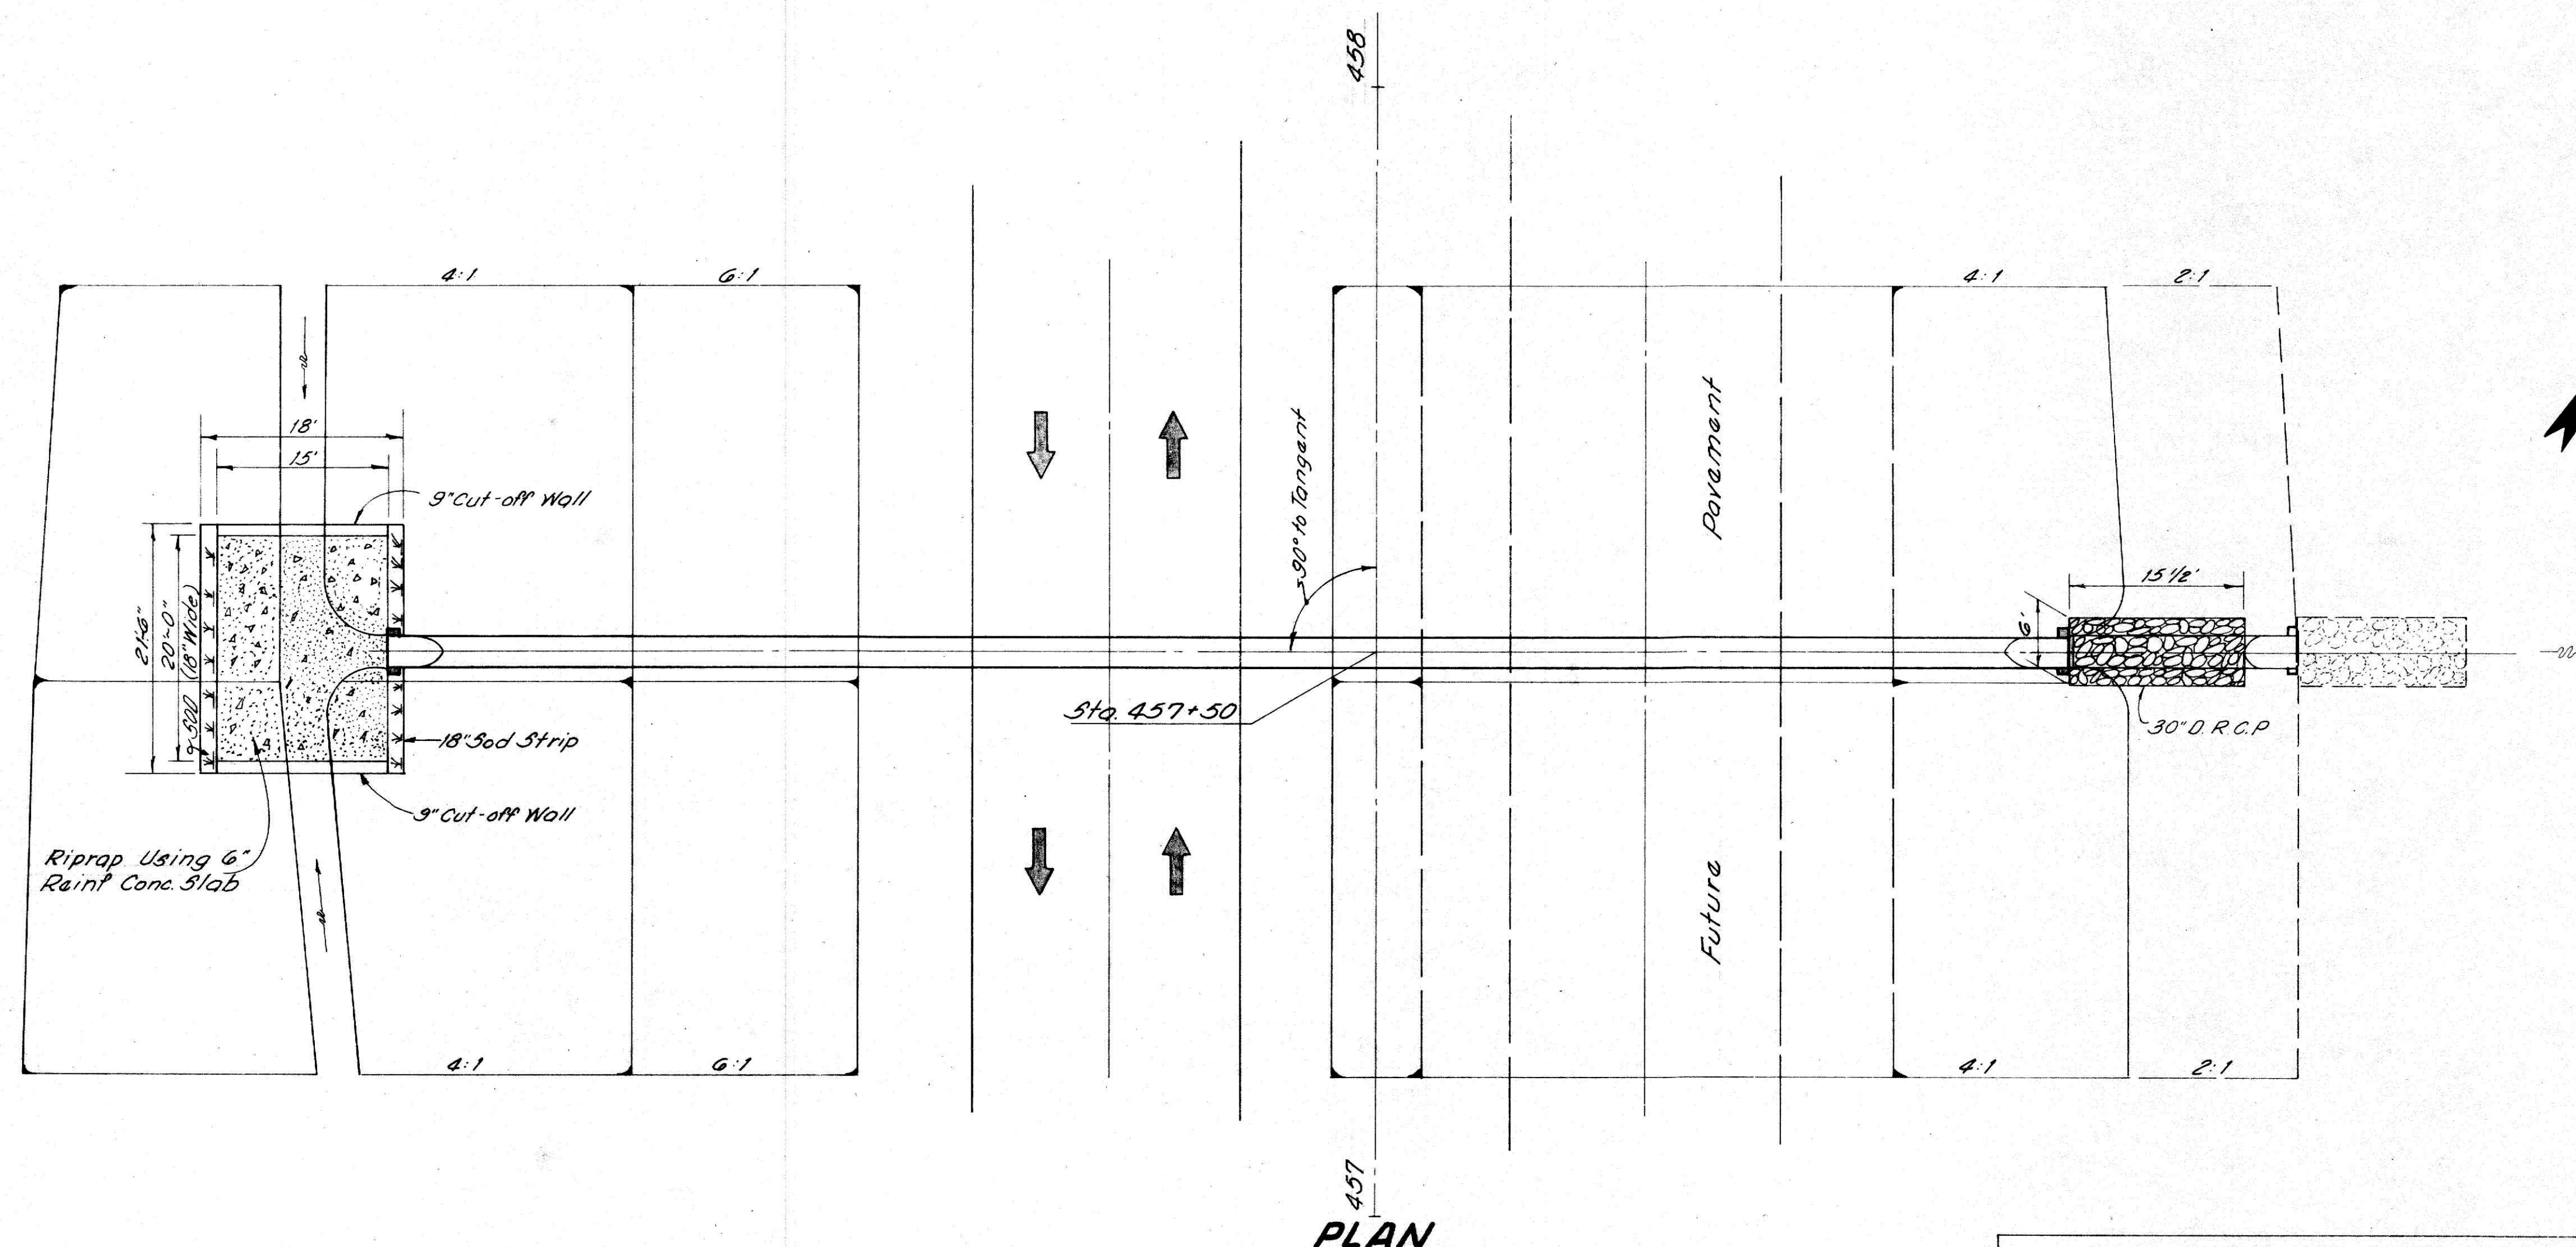