


PER. 75-2657
MUS. 75-000

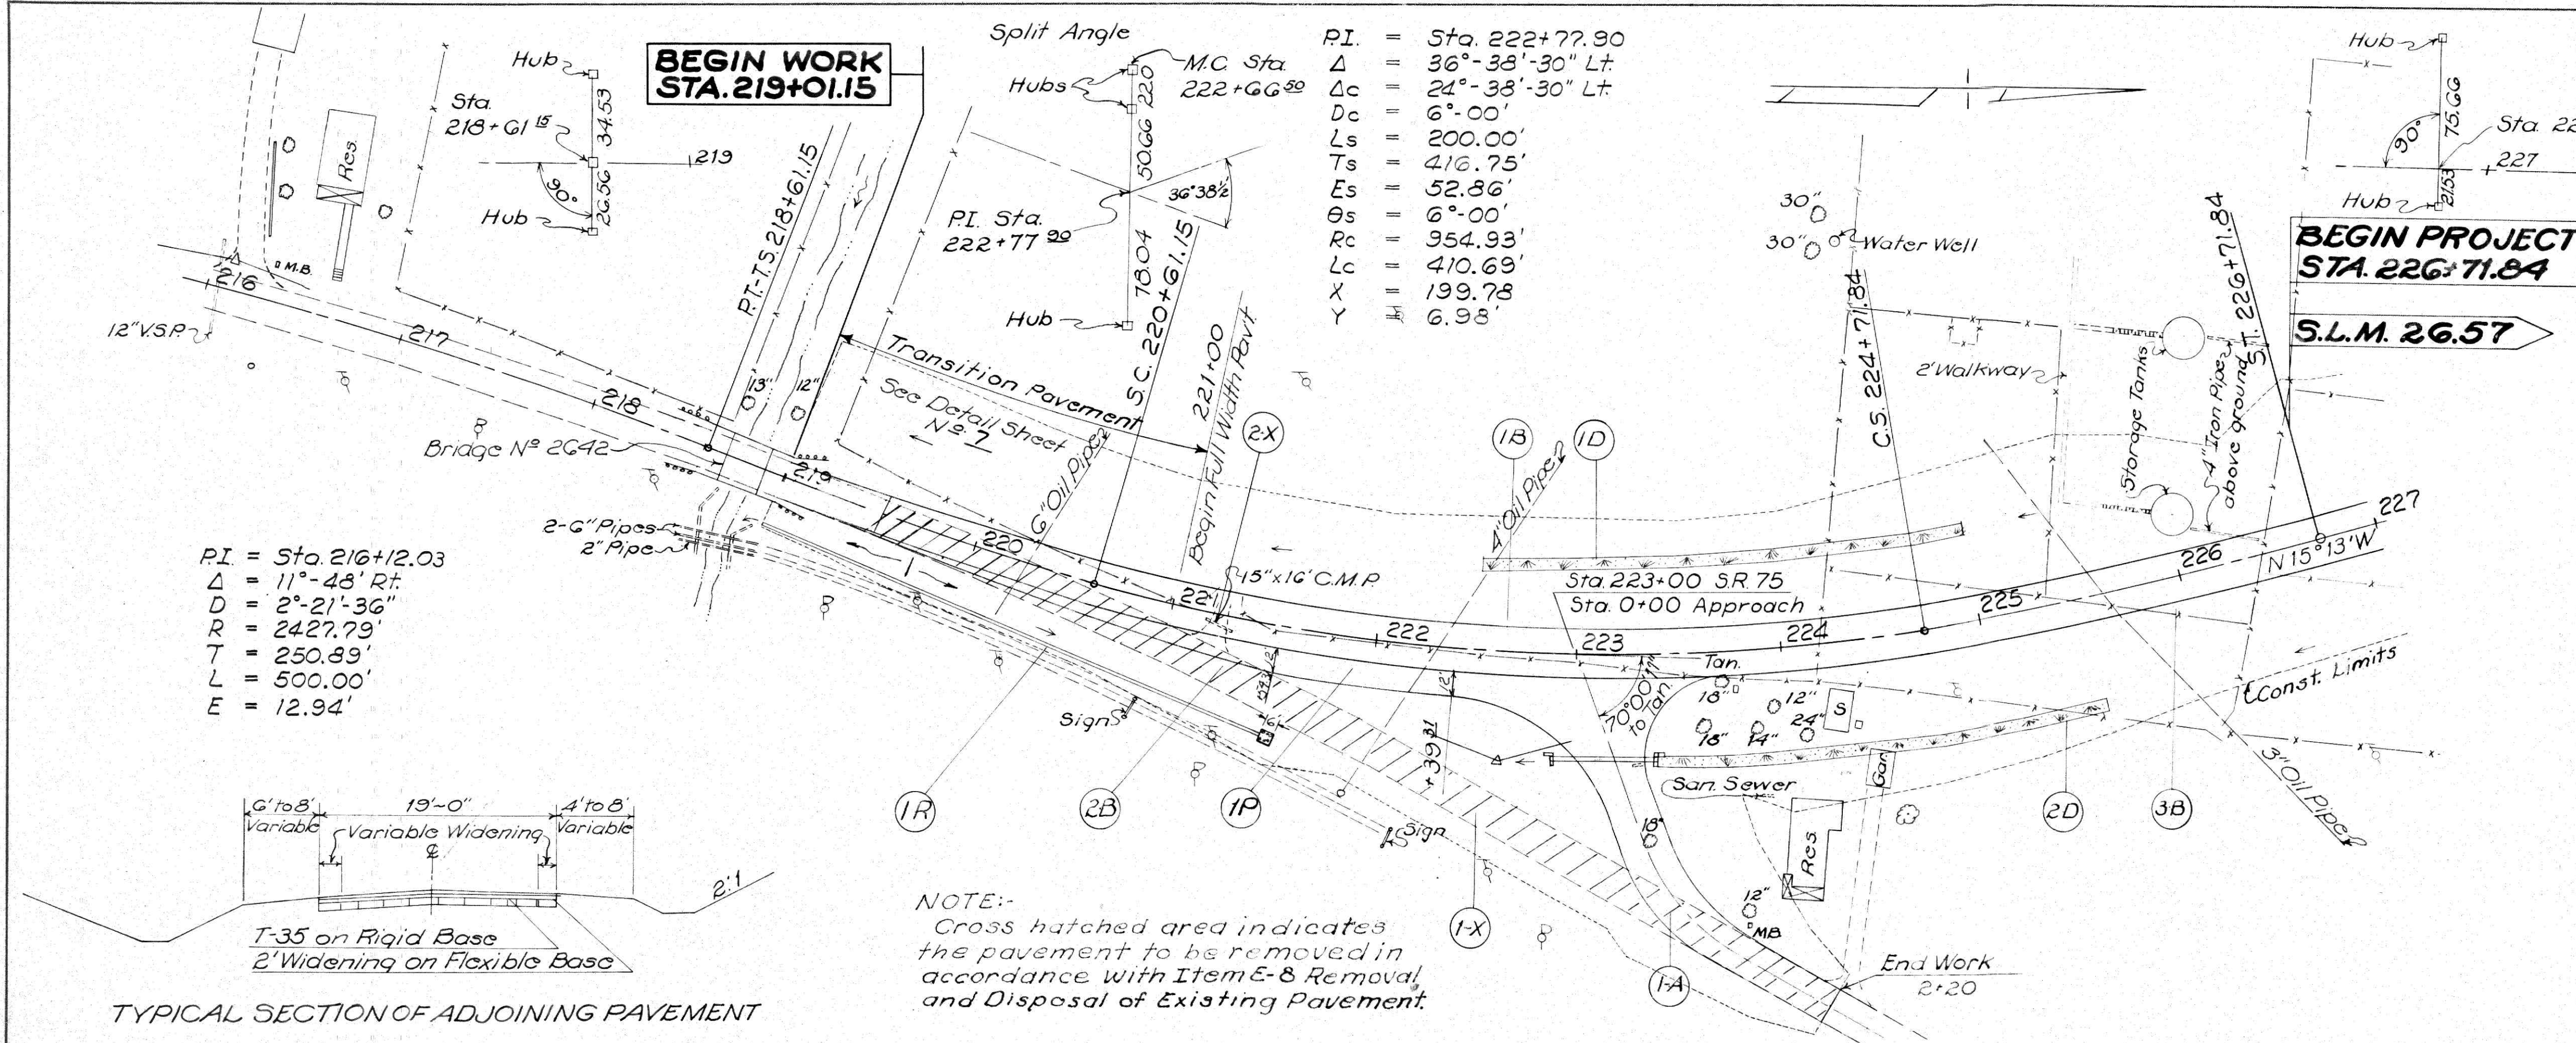

(B) STABILIZED BERMS

Mark	Station		Side	Stabilized Berm Sq Yds.
	From	To		
1-B	219+01.15	227+00	Lt.	267
2-B	219+01.15	222+76	Rt.	78
3-B	223+45	227+00	Rt.	158
Total				503

(P) PAVEMENT

Mark	Station		B-20 Waterbound Macadam Sq. Yds.	I-22 Subbase Cu. Yds.	E-1 Comp Subg Sq. Yds.	F-30 Prime Type C Gals.	F-35 Jct. Level Cu. Yds.	B-35 3/4" Level Cu. Yds.	B-35 3/8" Base Cu. Yds.
	From	To							
1-P	221+00	222+39.1	172	29	172	69	6	6	15
Total			172	29	172	69	6	6	15

(A) DRIVES AND APPROACHES

Mark	Station	Side	Type	Details on Sheet
1-A	223+00	Rt.	Rd. Appr.	174

(D) DITCHES

Mark	Station		Side	L-10 Sodding Sq Yds.	
	From	To		Type 1	Type 2
1-D	222+50	225+00	Lt.	160	
2-D	223+40	225+50	Rt.	149	
Total				309	

(R) ROADWAY DRAINAGE

Mark	Station		Side	I-3 Roadway Drainage Lin. Ft.	I-10 Riprap Sq Yds.
	From	To			
1-R	219+01.15	221+40	Rt.	266	4
Total				266	4

(X) REMOVALS

Mark	Station		E-8 Rem. & Disp. of Ex. Pavt. Sq. Yds.	E-12 Pipe Removed 15' Under Lin. Ft.
	From	To		
1-X	219+50	224+26	998	
2-X	222+18			16
Total			998	16

