

PER. 75-26.57
MUS. 75-0.00

STRUCTURES 20' SPAN & UNDER

Struc. No	Station	Proposed			Details on Sheet
		Type	Size	Length	
1	239+60	Pipe	36"	188'	211

(B) STABILIZED BERM

Mark	Station		Side	Stabilized Berm Sq. Yds.
	From	To		
1-B	238+00	249+00	Lt.	489
2-B	238+00	249+00	Rt.	489
Total				978

(A) DRIVES AND APPROACHES

Mark	Station	Side	Type	Details on Sheet
1-A	TR Sta. 7+90	Lt.	Turn Around	47
2-A	TR Sta. 13+60	Rt.	Turn Around	50

(D) DITCHES



Mark	Station		Side	L-10 Sodding Sq. Yds.		I-14 Paved Gutter Type 1 Lin. Ft.	I-10 Dumped Rock Chan. Protect. Cu. Yds.
	From	To		Type 1	Type 2		
1-D	238+00	239+56	Lt.		112		
2-D	239+71	241+25	Lt.	105			
3-D	241+40	245+50	Lt.			446	
4-D	245+50	247+00	Lt.	100			
5-D	241+25	241+40	Lt.				G
Total				205	112	446	G

(G) GUARD RAIL

Mark	Station		Side	I-15 Guard Rail S.B. (deep) Lin. Ft.
	From	To		
1-G	238+00	245+00	Lt.	700
2-G	238+00	245+25	Rt.	725
3-G	Twp. Rd. Sta. 8+50			25
4-G	Twp. Rd. Sta. 13+20			25
5-G	248+75	249+00	Rt.	25
Total				1500

(U) PIPE UNDERDRAINS

Mark	Station		Side	I-4 6" Pipe Underdrain Lin. Ft.		I-4 8" Outlet Pipe Lin. Ft.		I-5 6" x 45° Pipe Spc. Each	
	From	To							
1-U	245+50	249+00	Lt.	350		10		1	
2-U	246+00	249+00	Rt.	300		10		1	
Total				650		20		2	

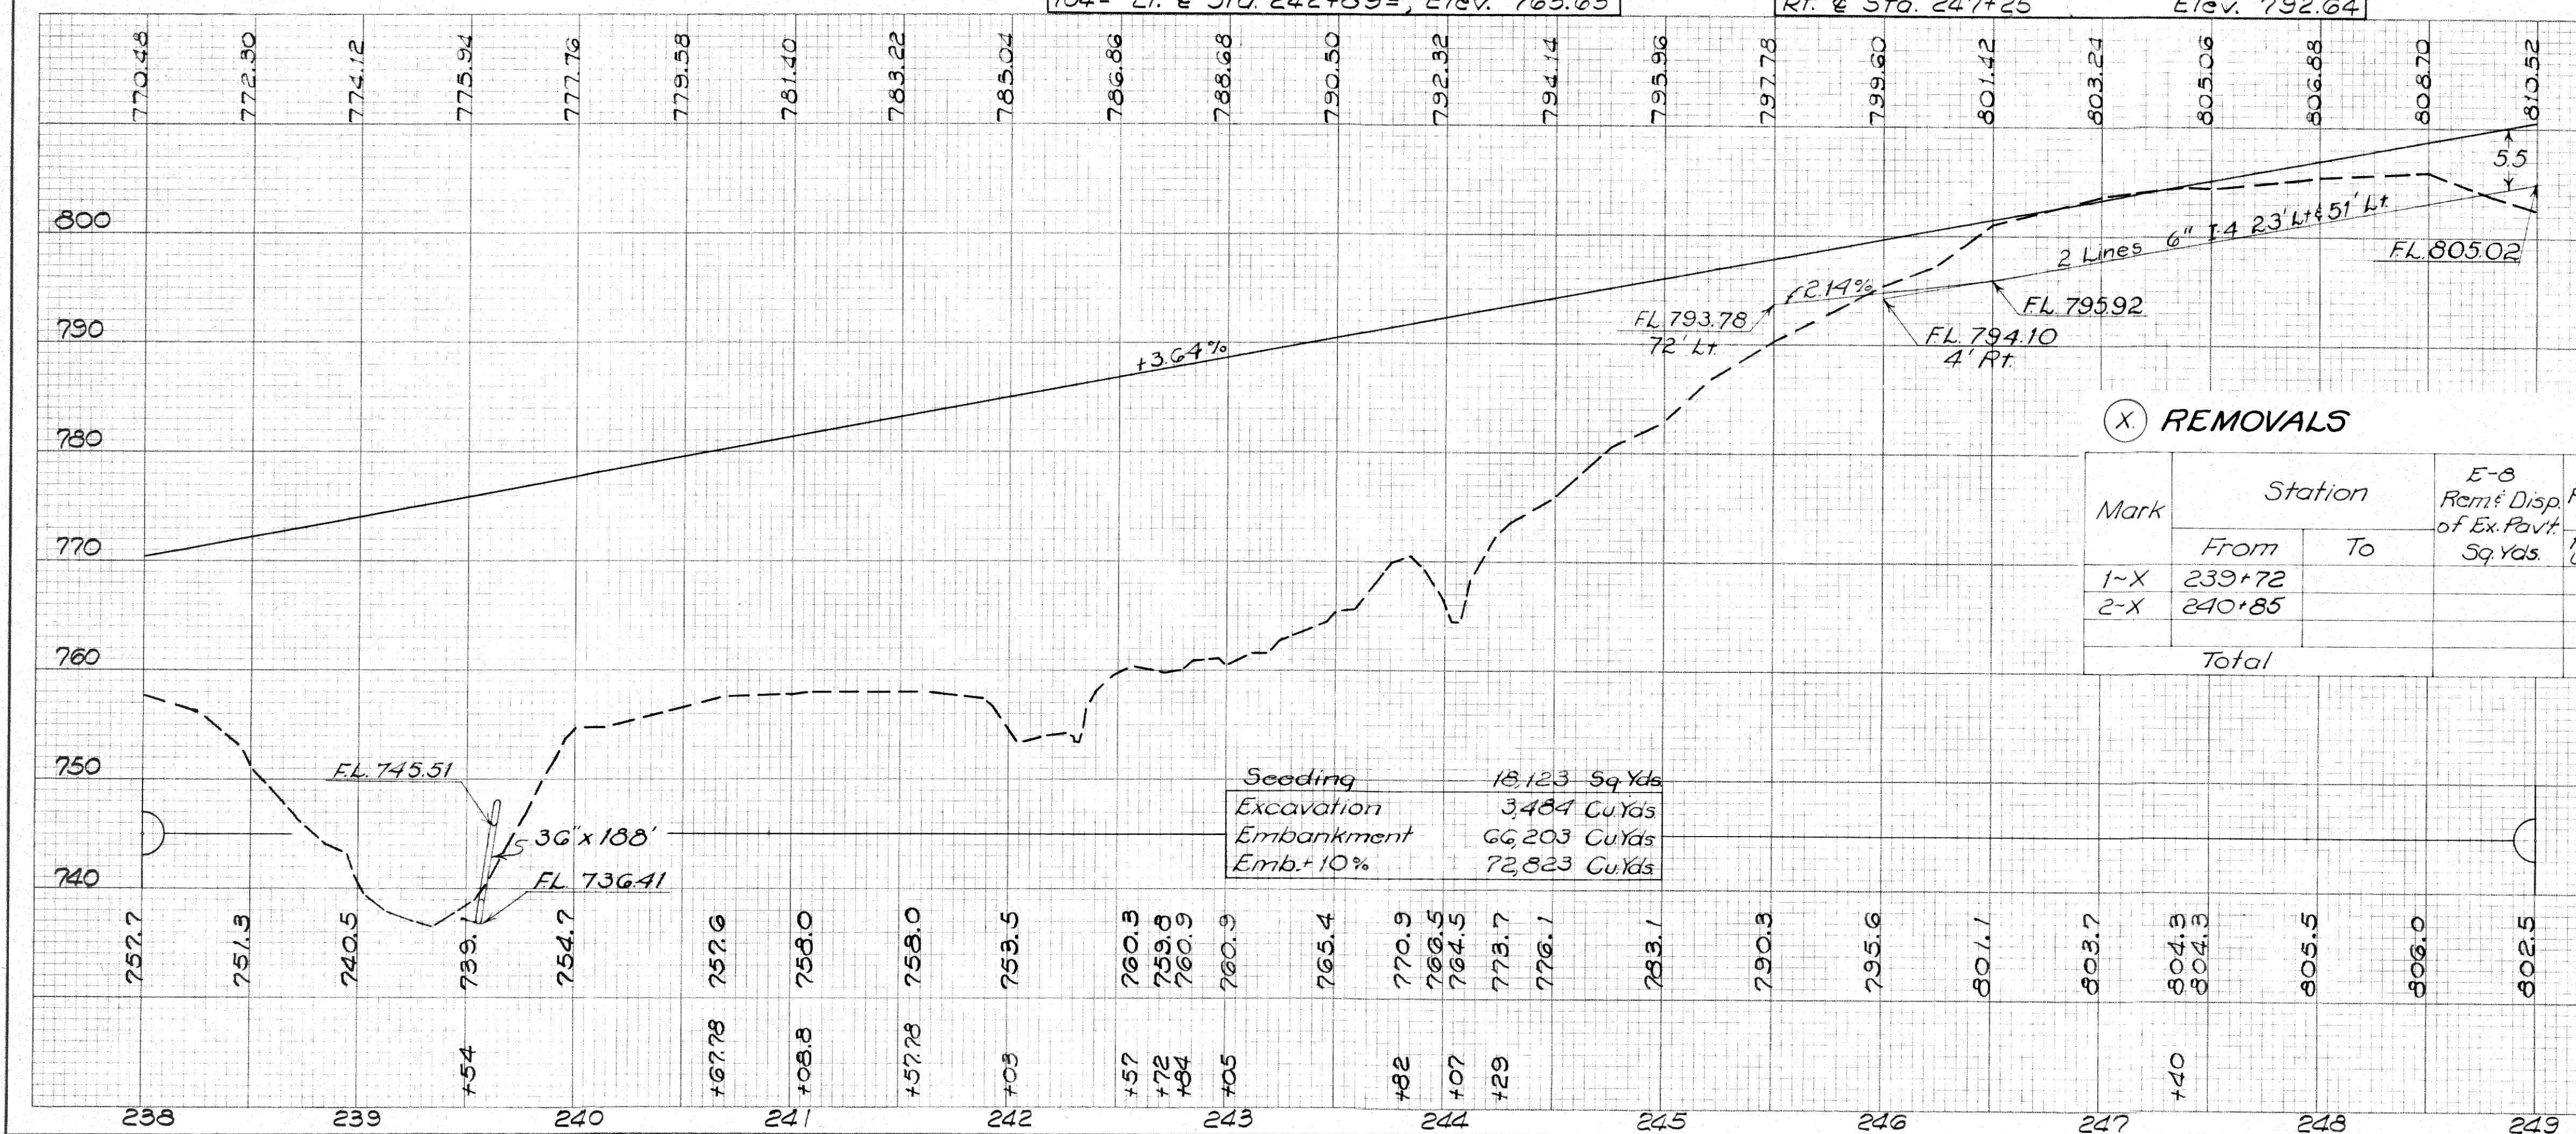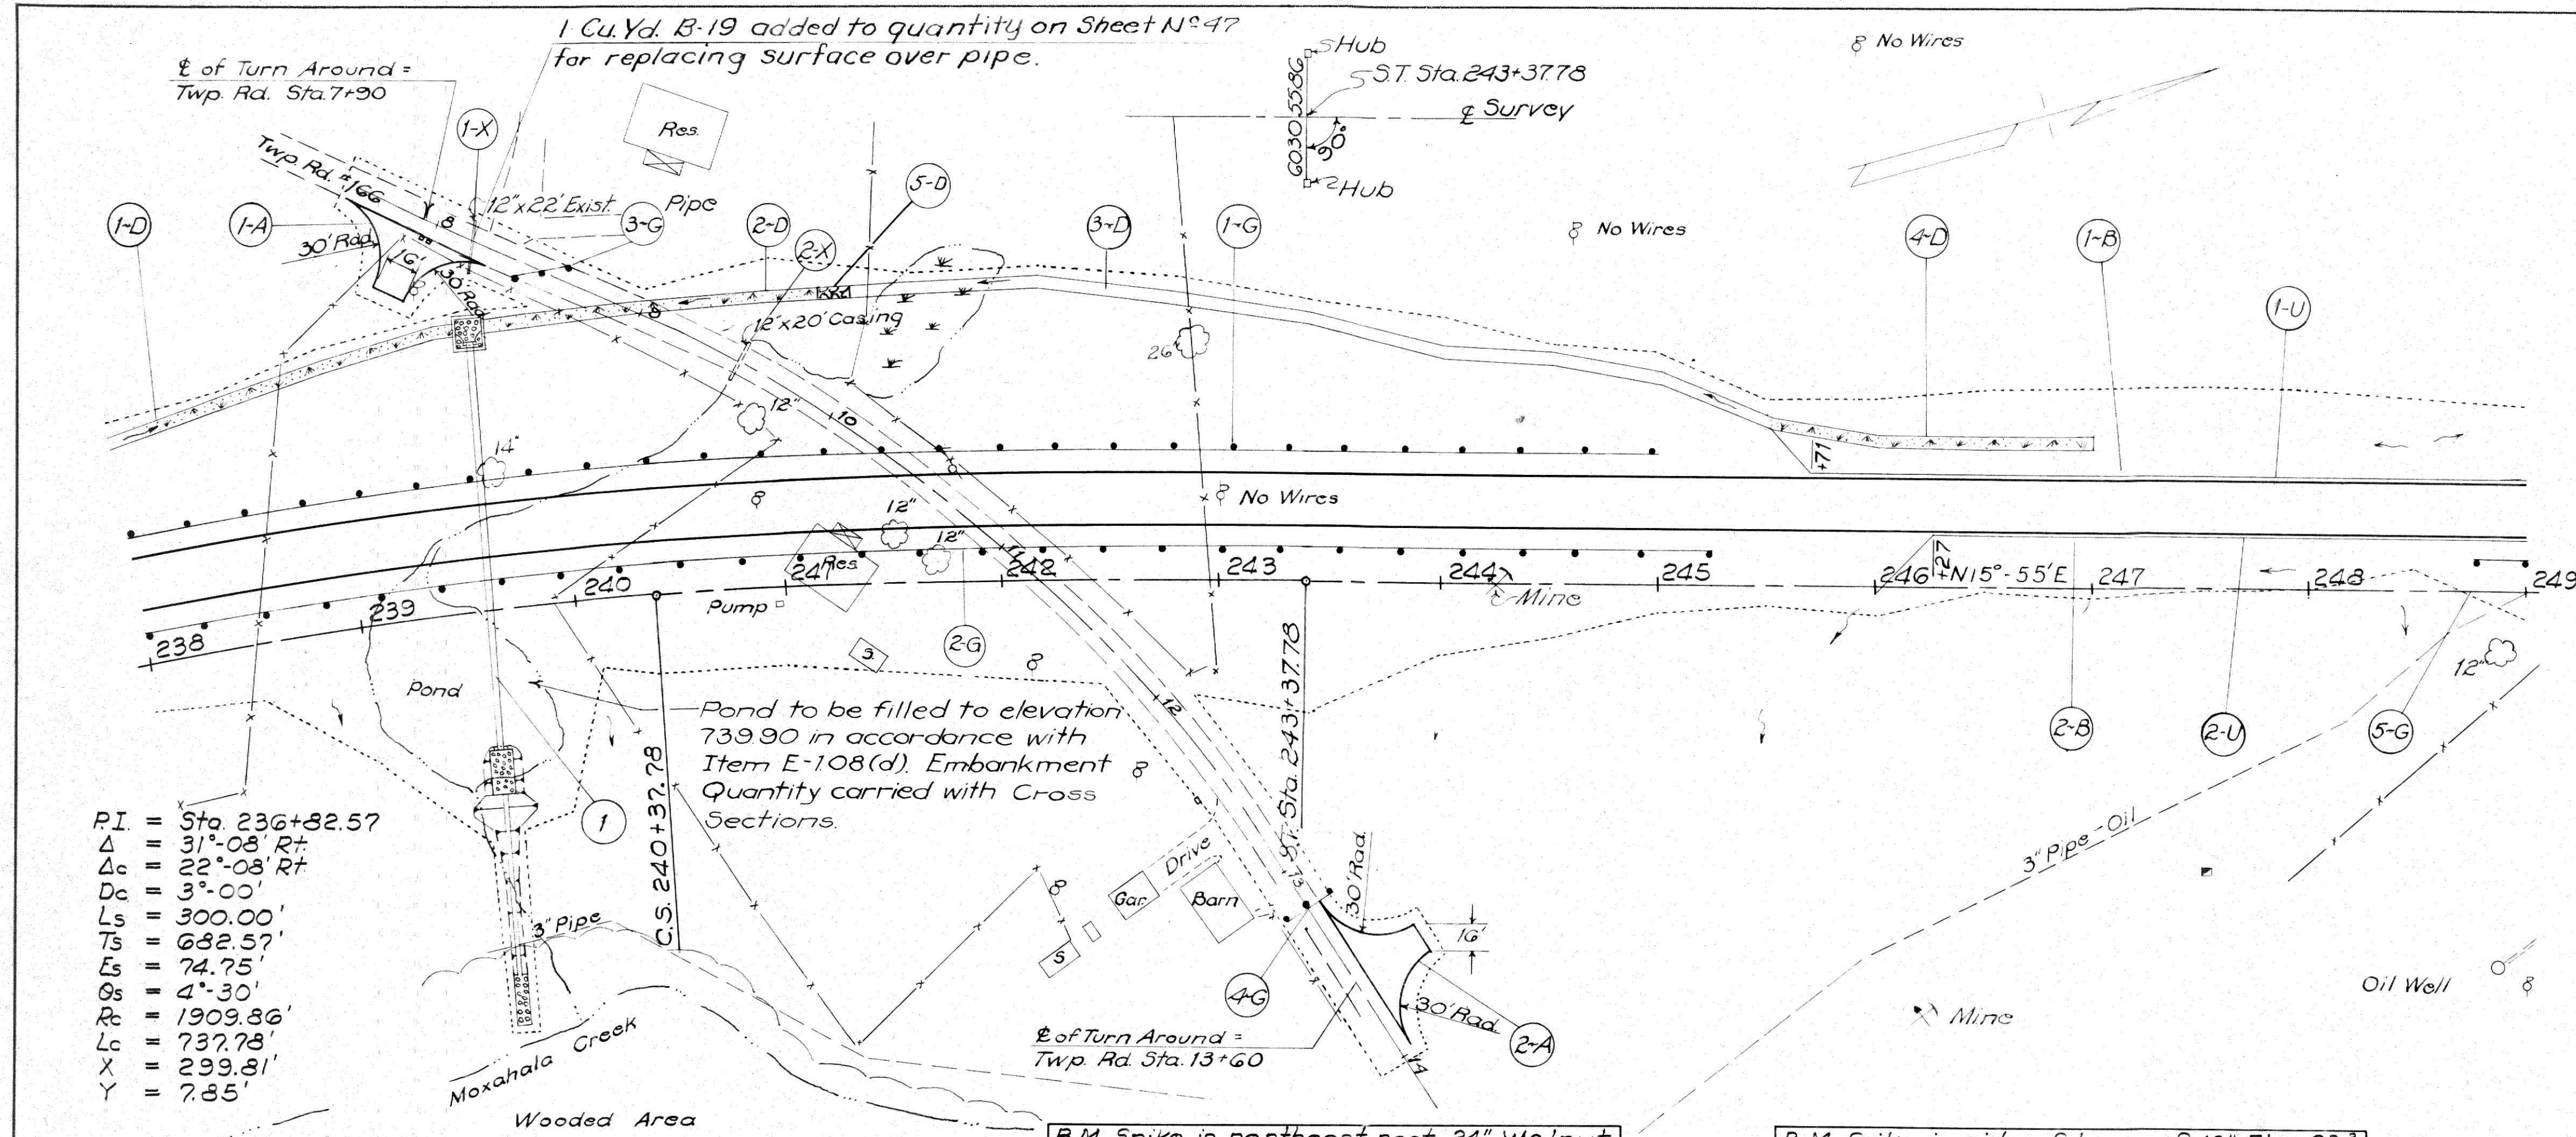

(X) REMOVALS

Mark	Station		E-8 Remt. Disp. of Ex. Pavt. Sq. Yds.	E-12 Pipe Removed Lin. Ft.
	From	To		
1-X	239+72			22'
2-X	240+85			20'
Total				42'

Seeding	18,123 Sq. Yds.
Excavation	3,484 Cu. Yds.
Embankment	66,203 Cu. Yds.
Emb. + 10%	72,823 Cu. Yds.