

PER. 75-26.57
MUS. 75-000

STRUCTURES 20' SPAN & UNDER

Stru No	Station	Proposed			Details on Sheet
		Type	Size	Length	
11	397+79	Pipe	30"	90'	221

B STABILIZED BERMS


Mark	Station		Side	Stabilized Berm Sq Yds.
	From	To		
1-B	392+00	403+00	Lt.	489
2-B	392+00	403+00	Lt.	489
Total				978

D DITCHES

Mark	Station		Side	L-10 Sodding Sq Yds.	
	From	To		Type 1	
1-D	396+50	397+79	Rt.	86	
2-D	397+00	397+79	Lt.	55	
3-D	401+00	403+00	Rt.	133	
4-D	402+00	403+00	Lt.	74	
Total				348	

U PIPE UNDERDRAINS

Mark	Station		Side	I-4 6" Pipe Underdrain Lin. Ft.	I-4 8" Outlet Pipe Lin. Ft.	I-5 6"x45° Pipe Spec. Each
	From	To				
1-U	401+00	403+00	Rt.	200		
Total				200		

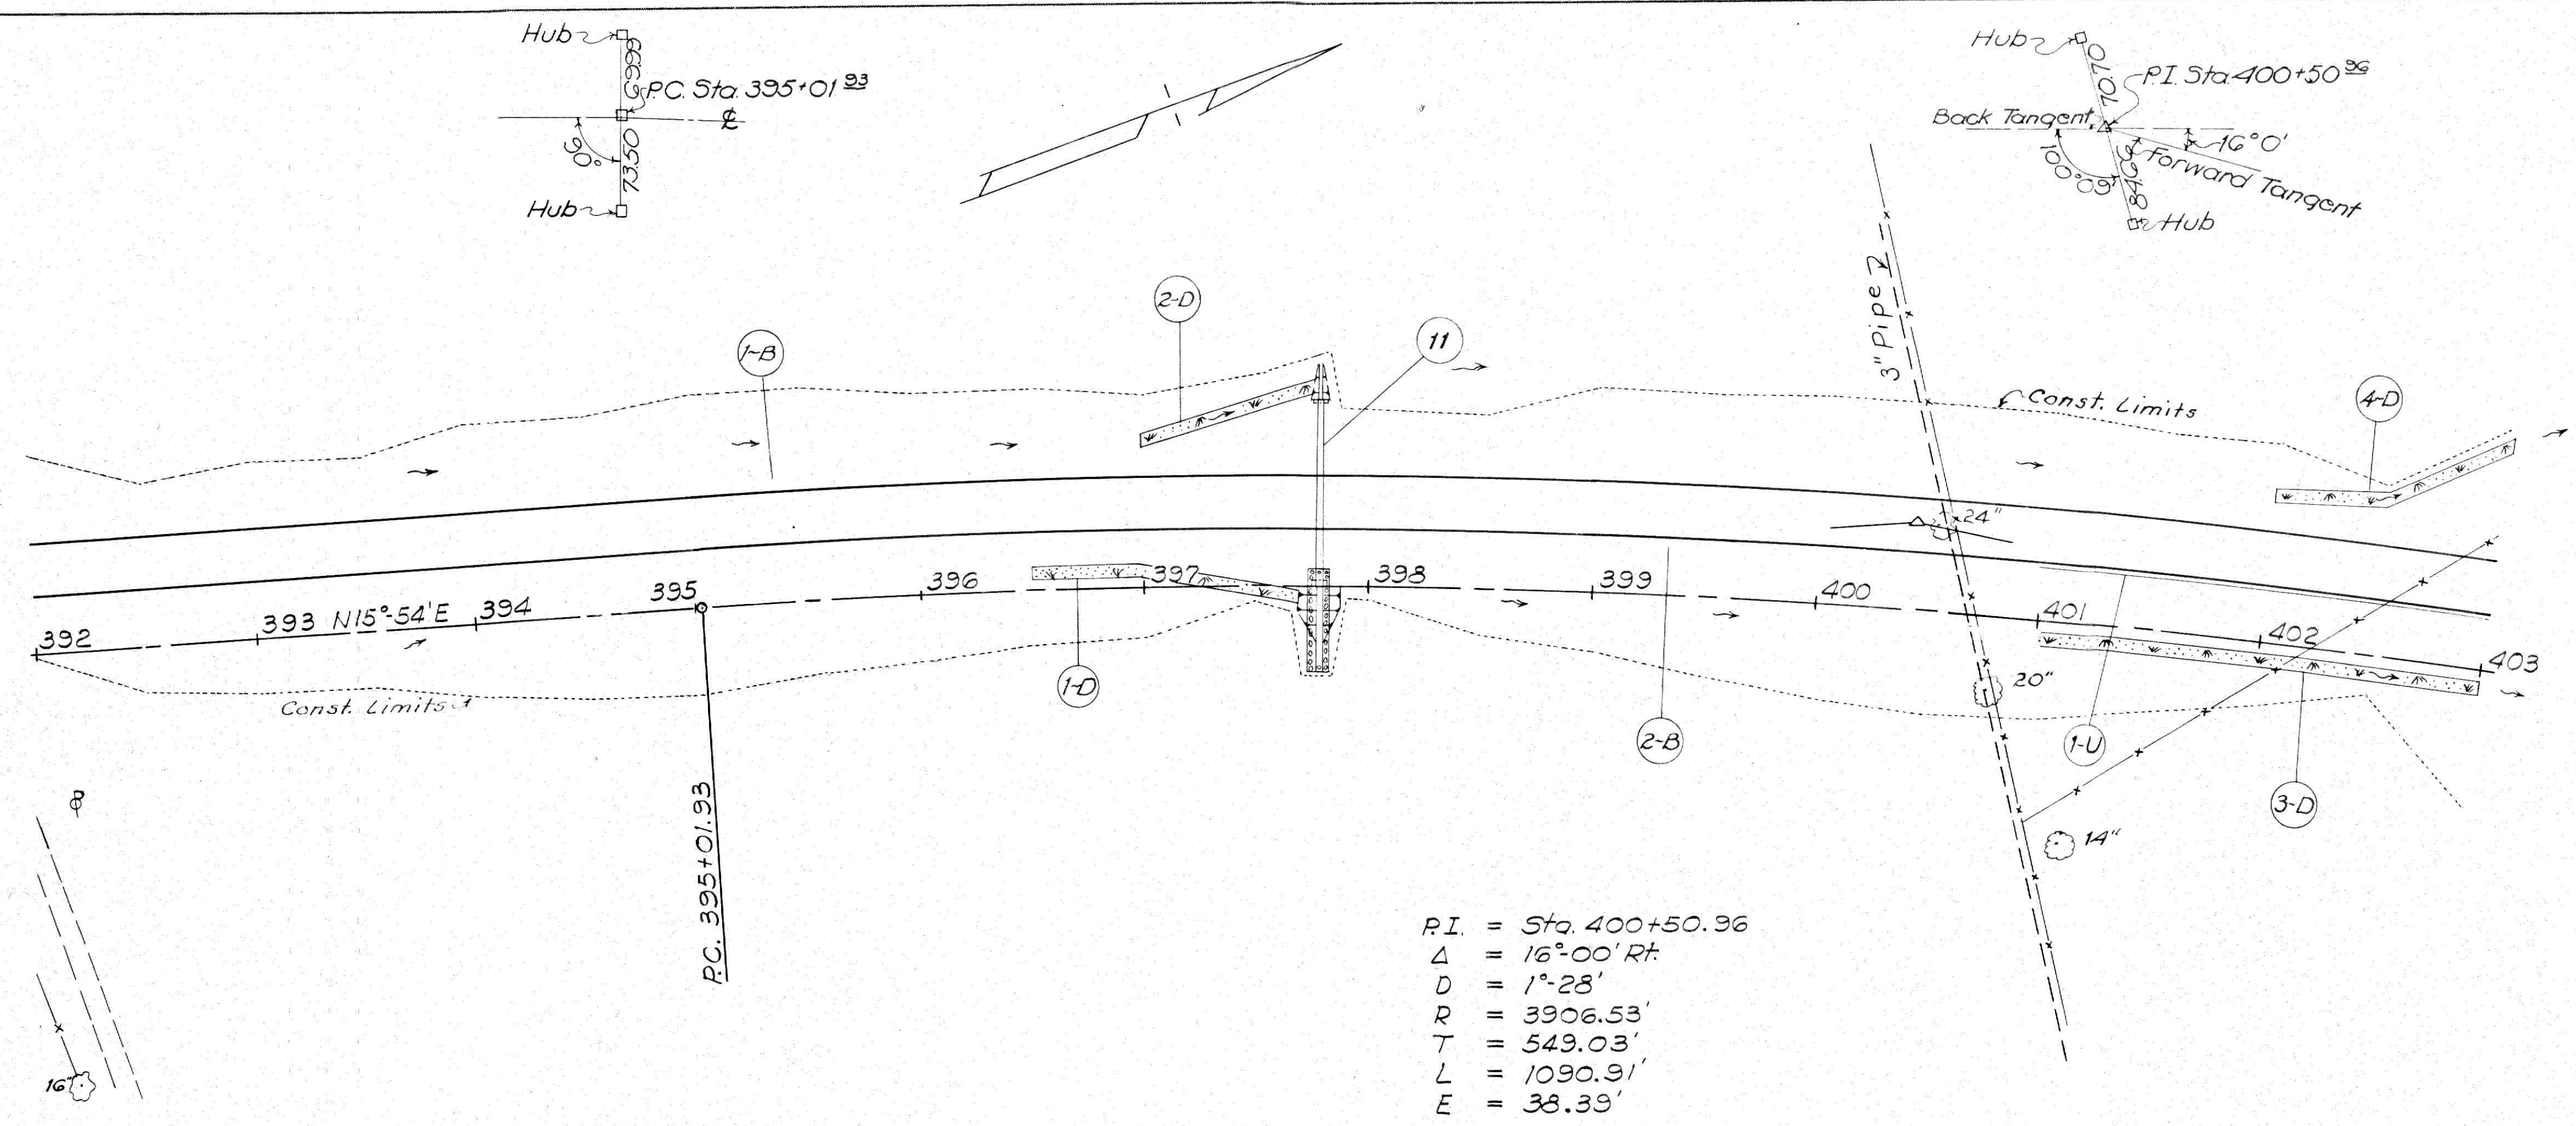

P.I. = Sta. 400+50.96
 Δ = 16°00' Rt.
 R = 3906.53'
 T = 549.03'
 L = 1090.91'
 E = 38.39'

B.M. Spike in west root of 28" Hackberry,
190' Rt. & Sta. 392+15 Elev. 813.34'

B.M. Spike in west root of 14" Wild Cherry,
100' Rt. & Sta. 401+05.5 Elev. 809.67'

