


ROADWAY DRAINAGE										Remarks
Item	From Station	To Station	Side	Pipe Size	Length	Material	Notes	Remarks		
5-RD	260+00	263+40	L	34	340	10'				Red. 4' for Y's
6-RD	266+70	268+10	L	34	140	10'				Red. 4' for Y's
7-RD	272+40	273+80	L	34	140	10'				Red. 4' for Y's
8-RD	285+70	287+10	L	34	140	10'				Red. 4' for Y's
9-RD	289+50	291+00	R	34	150	10'				Red. 4' for Y's
10-RD	291+50	292+00	R	34	50	10'				Red. 4' for Y's
Totals										

PIPE UNDERDRAINS*					Remarks
Item	From Station	To Station	Side	Pipe Size	
4-U	260+00	262+70	R/L	360	
5-U	267+00	269+00	R/L	360	
6-U	281+00	282+00	R/L	360	Outlet in ditch
7-U	284+50	285+00	R/L	360	Outlet in ditch
8-U	285+50	286+00	R/L	360	
9-U	291+31	291+91	R/L	360	
Totals					1362

ROADWAY DRAINAGE (PAVEMENT DRAINS)									
Item	Station	Side	Drain Basin	Outlet	30' E.T.I's	Rep. Sg. Yds.	#3-C		
7-RD	262+00	L	1	16	2	1			
8-RD	262+00	R	1	16	2	1			
9-RD	285+65	R	1	16	2	1			
10-RD	285+00	L	1	16	2	1			
11-RD	285+50	R	1	16	2	1			
12-RD	267+00	L	1	16	2	1			
13-RD	267+00	R	1	16	2	1			
14-RD	273+00	L	1	16	2	1			
15-RD	273+00	R	1	16	2	1			
TOTAL									

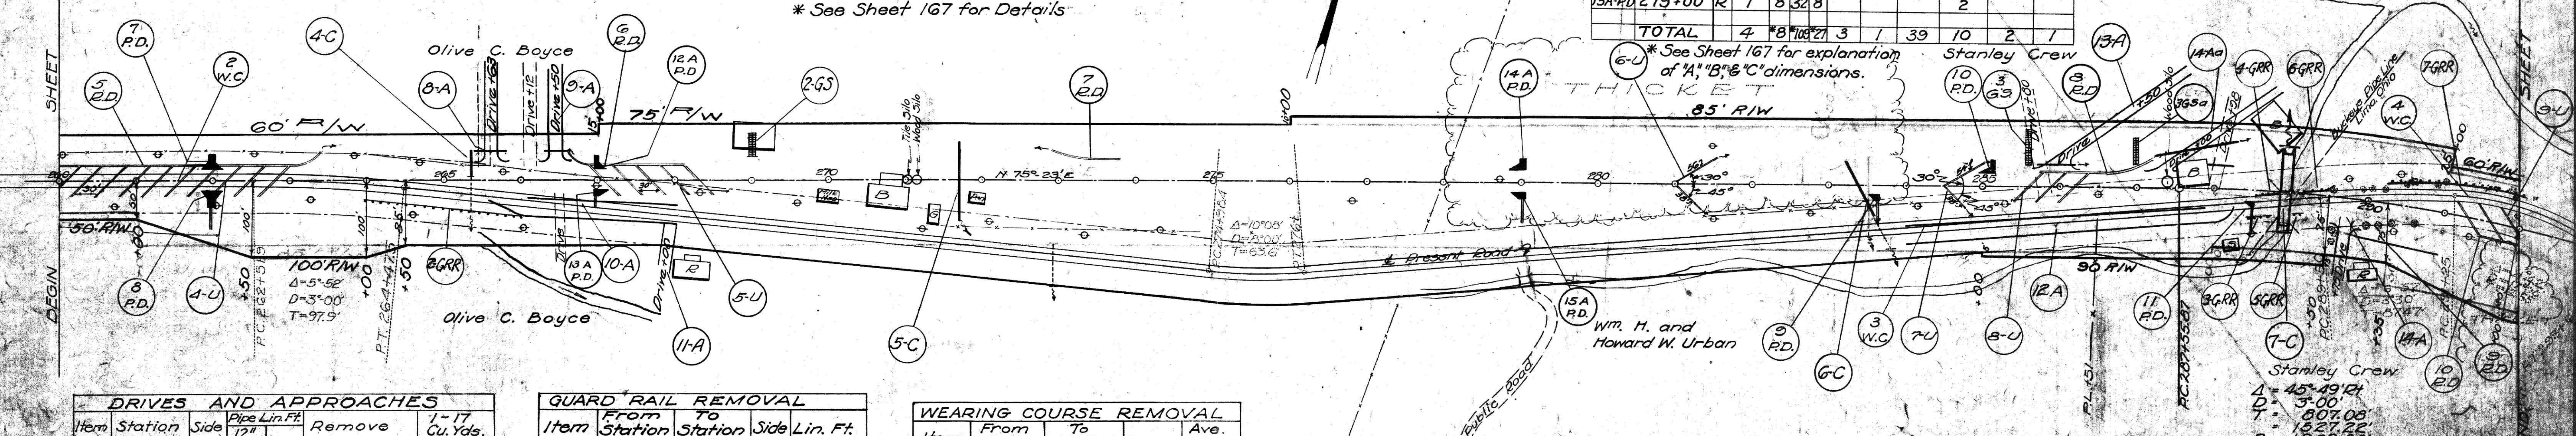

DRIVES AND APPROACHES				
Item	Station	Side	Remove	1-17 Cu. Yds.
8-A	265+63	L	10' x 12' Cor.	9
9-A	266+50	L		6
10-A	266+265	R		37
11-A	269+00	R		4
12-A	284+285	R		74
13-A	285+50	L	12' x 16' Wood Box	23
14-A	289+75	R	12' x 16' Cor.	9
14-A	291+00	L		20
Total				182

GUARD RAIL REMOVAL				
Item	From Station	To Station	Side	Lin. Ft.
2-GRR	263+20	266+14	R	224
3-GRR	268+40	268+72	R	32
4-GRR	268+55	268+83	L	28
5-GRR	289+08	289+13	R	12
6-GRR	289+14	289+46	L	32
7-GRR	290+26	292+00	L	174
Total				502

WEARING COURSE REMOVAL				
Item	From Station	To Station	Sq. Yds.	Ave. Width
2-WC	260+00	263+80	622.23	16
3-WC	284+00	285+00	177.78	16
4-WC	290+50	291+75	266.67	16
Total				1066.68

GUTTERS ON SLOPES & DITCHES				
Item	Station	Side	Lin. Ft.	
2-GS	269+00	L	37	
3-GS	285+60	L	60	
3-GS	287+00	L	37	
Total				134

STRUCTURES - 20 FT. SPAN AND UNDER									
No.	Station	Type	Size	Length	Type	Size	Length	Sheet No.	Notes
4-C	265+35.5	18" Renc.	24"	45'	Pipe	24"	Ext. 34' L	145	
5-C	271+70				Pipe	24"	Ext. 104'	145	
6-C	283+95				Pipe	15"	100'	146	
7-C	283+94.7	Stone Arch	12.5 span	40'-6"	Concrete	10'-8"	Ext. 104' L	147	

