

PRESENT STR. MU-22-190
Type: Conc. Beam
Span: 30'
Roadway: 23'-8"
Shew: -39°-30' R.F.

PAVEMENT REMOVAL		REMOVAL	
Item	From Sta. To Sta.	Qty. Yds.	Width
1 RR	296+25 305+75	1764	16.5'
2 P.B.	310+00 315+00	889	16.0'
3 R.B.	318+25 323+50	1283	22.0'
Total		3936	

CHANNEL EXCAVATION				
Item	From Sta.	To Sta.	Cu. Yds.	Detail Sht.
1-CE	292+00	295+00	2199	170
Total			2199	


ROADWAY DRAINAGE (PAVEMENT DRAINS)									
Item	Station	Side	Size	Length	Outlet	30°	60°	90°	180°
12-RD	293+50	R	12"	36'	1	1	1	1	1
13-RD	293+50	R	12"	36'	1	1	1	1	1
14-RD	303+50	R	12"	36'	1	1	1	1	1
15-RD	303+50	L	12"	36'	1	1	1	1	1
16-RD	310+50	L	12"	36'	1	1	1	1	1
17-RD	314+50	L	12"	36'	1	1	1	1	1
18-RD	319+50	L	12"	36'	1	1	1	1	1
Totals						3	3	3	3

FED. RD. DIST. NO.	STATE	FED. AID PROJ.	FISCAL YEAR
10	OHIO	1(4)	1938

MUSKINGUM COUNTY
S.H. No. 1 SEC. R(P)

8
184

DATE
BY
CHECKED
NOTED
NO.

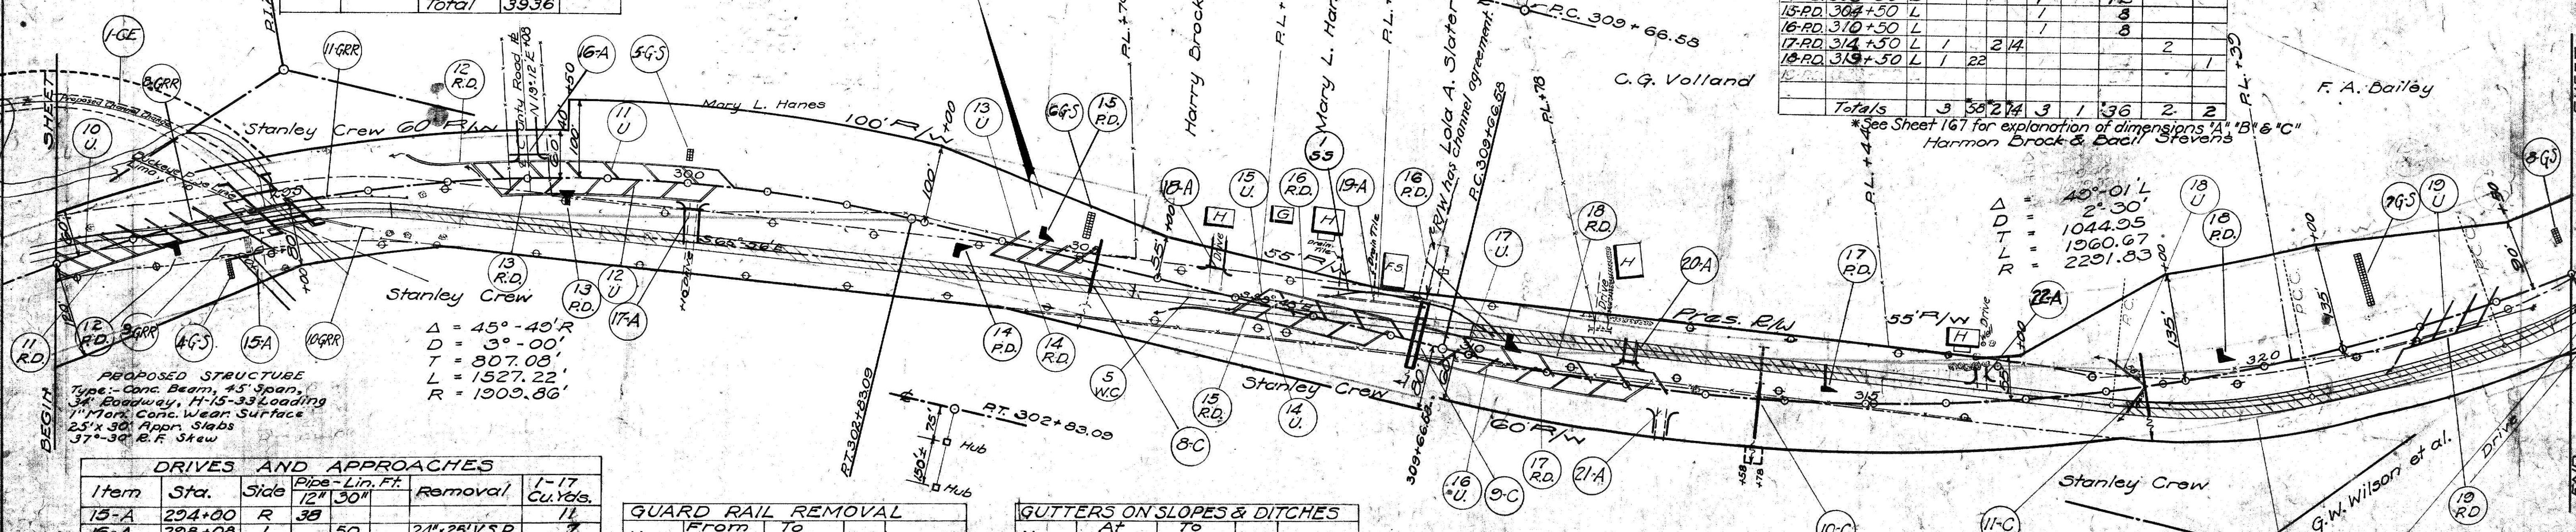

DRIVES AND APPROACHES				
Item	Sta.	Side	Pipe Lin. Ft.	Removal
15-A	294+00	R	38	11
16-A	298+03	L	50	7
17-A	300+10	R	24	5
18-A	306+75	L	24	5
19-A	308+310	L	24	37
20-A	312+00	R	24	4
21-A	312+50	L		6
22-A	316+50	L		6
Total			110 50	82

GUARD RAIL REMOVAL				
Item	From Sta.	To Sta.	Side	Lin. Ft.
8 GRR	292+00	294+34	L	234
9 GRR	293+00	294+55	R	75
10 GRR	295+68	295+23	R	25
11 GRR	294+24	296+44	L	150
Total				484

GUTTERS ON SLOPES & DITCHES				
Item	From Sta.	To Sta.	Side	Lin. Ft.
4 G-S	294+10		R	40
5 G-S	300+00		L	20
6 G-S	305+00		L	36
7 G-S	321+50		L	75
8 G-S	324+00		L	26
Total				197

STRUCTURES - 20 FT. SPAN AND UNDER									
No.	Station	Type	Size	Length	Type	Size	Length	Sheet No.	Str. No.
8-C	305+28.7	Conc. Box	3'0" x 3'0"	45'	Pipe	12"	65'	148	
9-C	309+32	Conc. Box	4'0" x 2'6"	85'	Pipe	24"	Ext. 68' Rt	149	
10-C	313+68	15" R.C.	24"	46'	Pipe	15"	80'	150	
11-C	318+50								

STORM SEWER				
Item	From Sta.	To Sta.	Side	Lin. Ft.
155	308+00	309+30	L	126
TOTAL				126

