


BEGIN PROJECT

STA. 533+98 on WPGH FAP No. 1 Re. Unit 3 Dec. 5, 1936

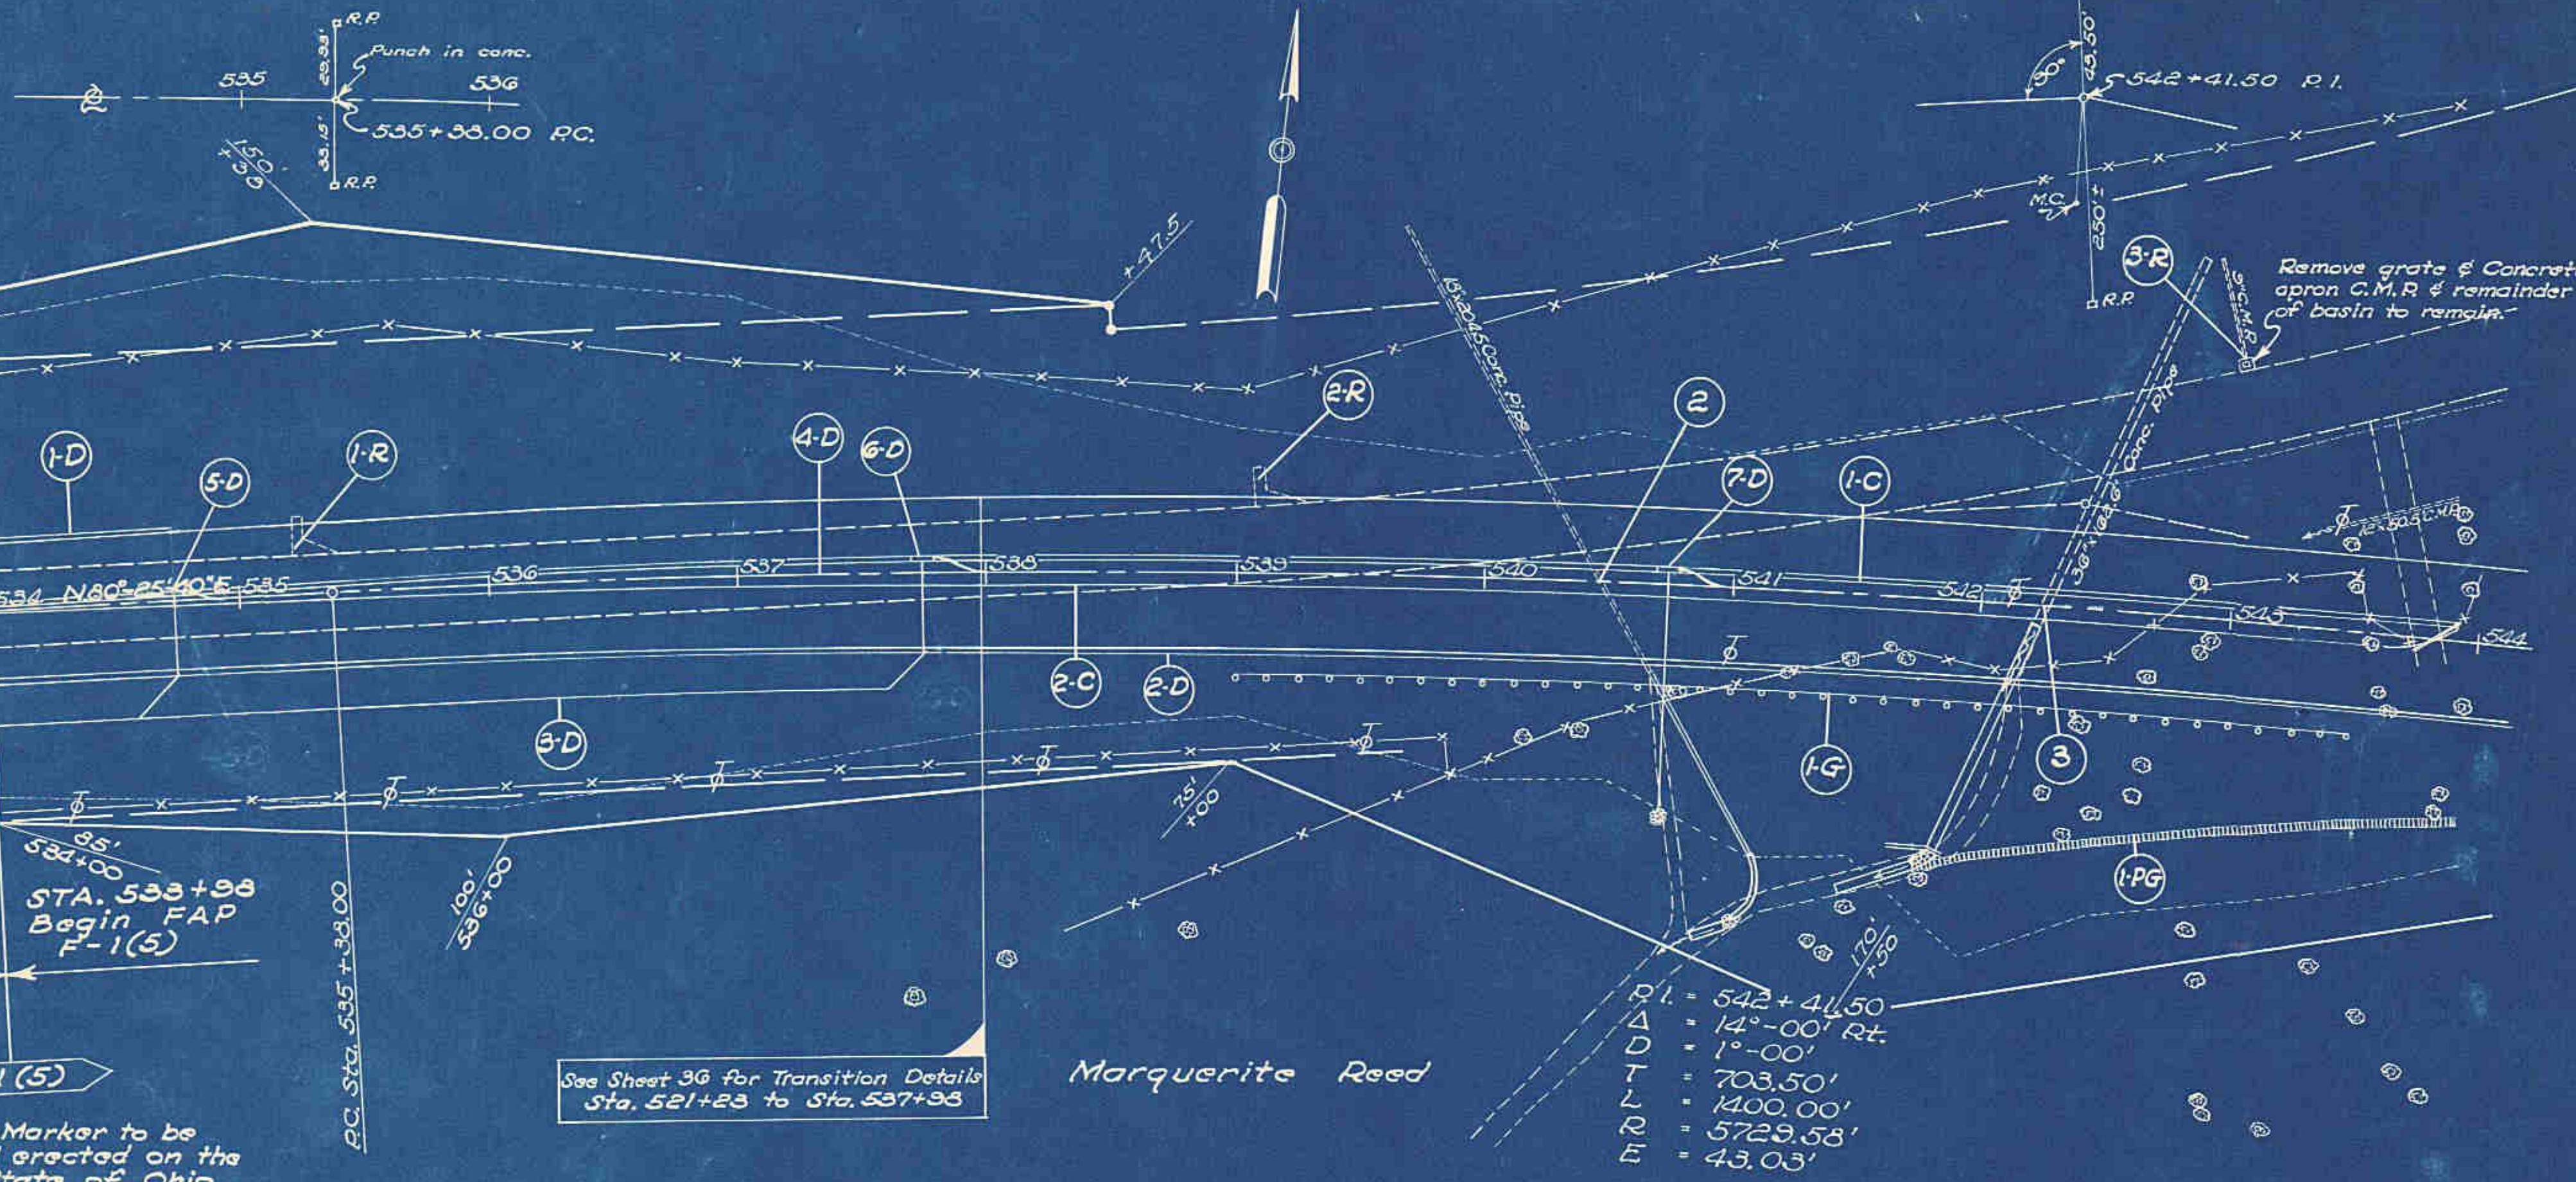

FED. DIVISION	STATE	PROJECT	FISCAL YEAR
2	OHIO	F-1(5)	16 200

MUSKINGUM COUNTY
S. H. 1 SEC. 7
& NEW CONCORD (Pt.)

CURB & GUTTER (C)

Item No.	Station	Side	Type 4 Comb. Curb & Gutter Lin. Ft.	Type 4-A Integral Conc. Curb - Lin. Ft.
	From	To		
	533+98	537+98	400.00	403.93
1-C	537+98	543+90.83	Lt.	592.83
2-C	537+98	543+63.17	Rt.	565.17
Totals			992.83	969.10

(Merger) See Sheet 36

REMOVALS (R)

Item No.	Station	Side	Remove & Dispose of Exist. Reinf. Conc. Drain Basin - Units	Remove & Dispose of Abandoned Units
1-R	533+25	Lt.	1	
2-R	539+10	Lt.	1	
3-R	543+00	Lt.		1
Totals			2	1

PAVEMENT REMOVAL

Station		Removal & Disposal of Exist. Reinf. Conc. Pav't. Sq. Yds.
From	To	
533+98	544+00	3413
Total		3413

PAVED GUTTER (PG)

Item No.	Station	Side	Type 1 Lin. Ft.
	From	To	
1-PG	541+85	543+98	Rt. 213
Total			213

STRUCTURES 20' SPAN & UNDER

Struc. No.	Station	Present			Proposed			Details on Sheet
		Type	Size	Length	Type	Size	Length	
2	540+14.33	Pipe	18"	204.5	Pipe	18"	288.5	163
3	542+24.61	Pipe	36"	162.7	Pipe	36"	264.7	164

GUARD RAIL (G)

Item No.	Station	Side	New Lin. Ft.
	From	To	
1-G	539+00	543+50	Rt. 450
Total			450

DRAINAGE (D)

Item No.	Station	Side	Std. #3 C. B. Units	12" Pipe For S.S. Under Pav't. Lin. Ft.	12" Pipe For S.S. Under Pav't. Lin. Ft.	12"x30" Bend Tee for S.S. Under Pav't. Lin. Ft.	12"x6" Bend Tee for S.S. Under Pav't. Lin. Ft.	12"x45" Bend Tee for S.S. Under Pav't. Lin. Ft.	12" Pipe For S.S. Under Pav't. Lin. Ft.	12"x24" Bend Tee for S.S. Under Pav't. Lin. Ft.	12"x45" Bend Tee for S.S. Under Pav't. Lin. Ft.	6" Pipe For S.S. Under Pav't. Lin. Ft.	6" Pipe For S.S. Under Pav't. Lin. Ft.	6" Pipe For S.S. Under Pav't. Lin. Ft.
	From	To												
1-D	533+98	534+75	Lt.											
2-D	533+98	544+00	Rt.											
3-D	533+98	537+60	Rt.											
4-D	534+75	544+00	Lt.											
5-D	534+75		Lt.	1	78			1	1					
6-D	537+75		Lt.	1	58			1	1					
7-D	540+75		Lt.	1	36	74	2	1					2	1
Totals			3	172	74	2	3	2	362	1	1	2004	2	3

