


MUSKINGUM COUNTY
S.H. 1 SEC. T
& NEW CONCORD (Pt.)

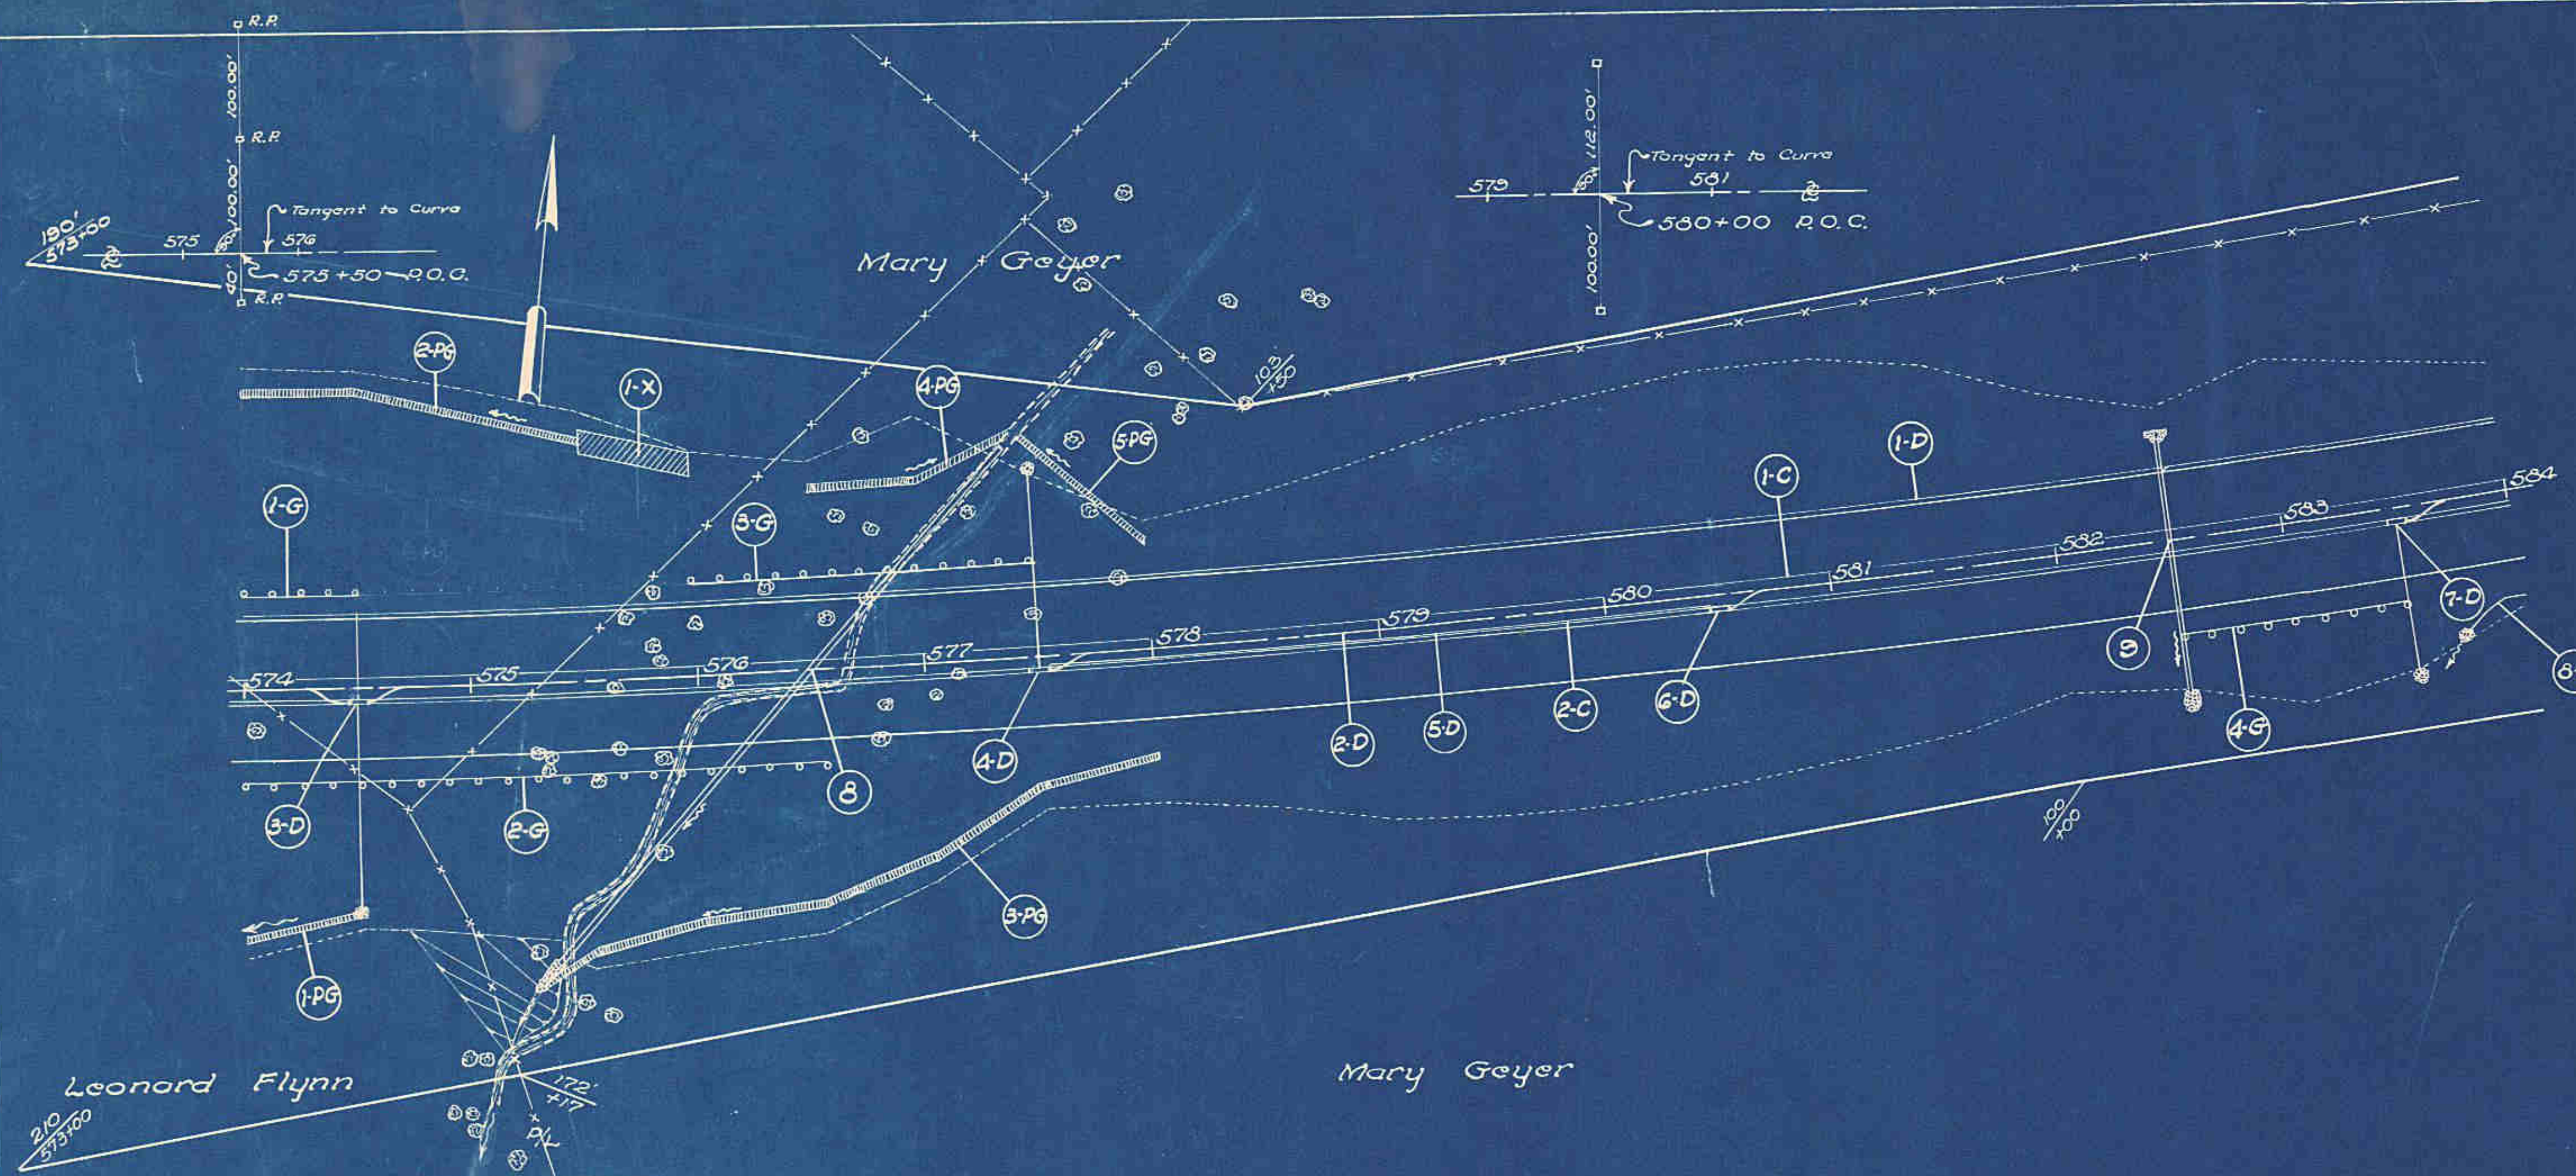

CURB & GUTTER (C)

Item No.	Station From	Station To	Side	Type 4-Comb. Curb & Gutter Lin. Ft.	Type 4-A Integral Conc. Curb-Lin. Ft.
1-C	574+00	584+00	Lt.		1000
2-C	574+00	584+00	Rt.	1000	
Totals				1000	1000

PAVED GUTTER (PG)

Item No.	Station From	Station To	Side	Type 1 Lin. Ft.
1-PG	574+00	574+30	Rt.	32
2-PG	574+00	575+30	Lt.	152
3-PG	575+30	578+00	Rt.	292
4-PG	578+30	577+40	Lt.	95
5-PG	577+40	578+00	Lt.	72
Total				663

STRUCTURES 20' SPAN & UNDER

Struc. No.	Station	Present		Proposed		Details
		Type	Size Length	Type	Size Length on Sheet	
8	576+50			Pipe 30"	300'	169
9	582+50			Pipe 18"	114'	170

GUARD RAIL (G)

Item No.	Station From	Station To	Side	New Lin. Ft.
1-G	574+00	574+50	Lt.	50
2-G	574+00	576+50	Rt.	250
3-G	576+00	577+50	Lt.	150
4-G	582+50	583+50	Rt.	100
Total				550

SODDING (X)

Item No.	Station From	Station To	Side	Location	Sodding sq. Yds.
1-X	575+50	576+00	Lt.		50
Total					50

DRAINAGE

(D)

Item No.	Station		Side	Str. #3 C. B. Units	12" Pipe for S.S. under Pav't.	12" Bend for S.S. Outlet Lin. Ft.	12"x30" Tee for S.S. Outlet Units	12"x6" Tee for S.S. under Pav't. Units	12"x45" Tee for S.S. under Pav't. Units	12" Pipe 18" S.S. Band for S.S. under Pav't. Lin. Ft.	12"x45" Tee for S.S. under Pav't. Units	12" Pipe 18" S.S. Band for S.S. under Pav't. Lin. Ft.	12"x45" Tee for S.S. under Pav't. Units	12" 6" Pipe Riprap 6"x6" for R.U. Sq. Yds	12" 6" Pipe Riprap 6"x6" for R.U. Units
	From	To			Lin. Ft.	Lin. Ft.	Lin. Ft.	Lin. Ft.	Lin. Ft.	Lin. Ft.	Lin. Ft.	Lin. Ft.	Lin. Ft.	Lin. Ft.	Lin. Ft.
1-D	574+00	584+00	Lt.											1000	
2-D	574+00	584+00	Rt.											1000	
3-D	574+50		Rt.	1	62	72	2	1						2	1
4-D	577+50		Rt.	1	38	52		1						2	1
5-D	577+52	580+48	Rt.		296										
6-D	580+50		Rt.	1		40								2	
7-D	583+50		Rt.	1	24							20		2	
8-D	583+75	584+00	Rt.									20	10	2000	8
	Total			4	420	164	2	2		20			10		

B.M. Track Spike, S. Root 36" W. Cherry
15' R. 574+05
E.L. 893.35

