


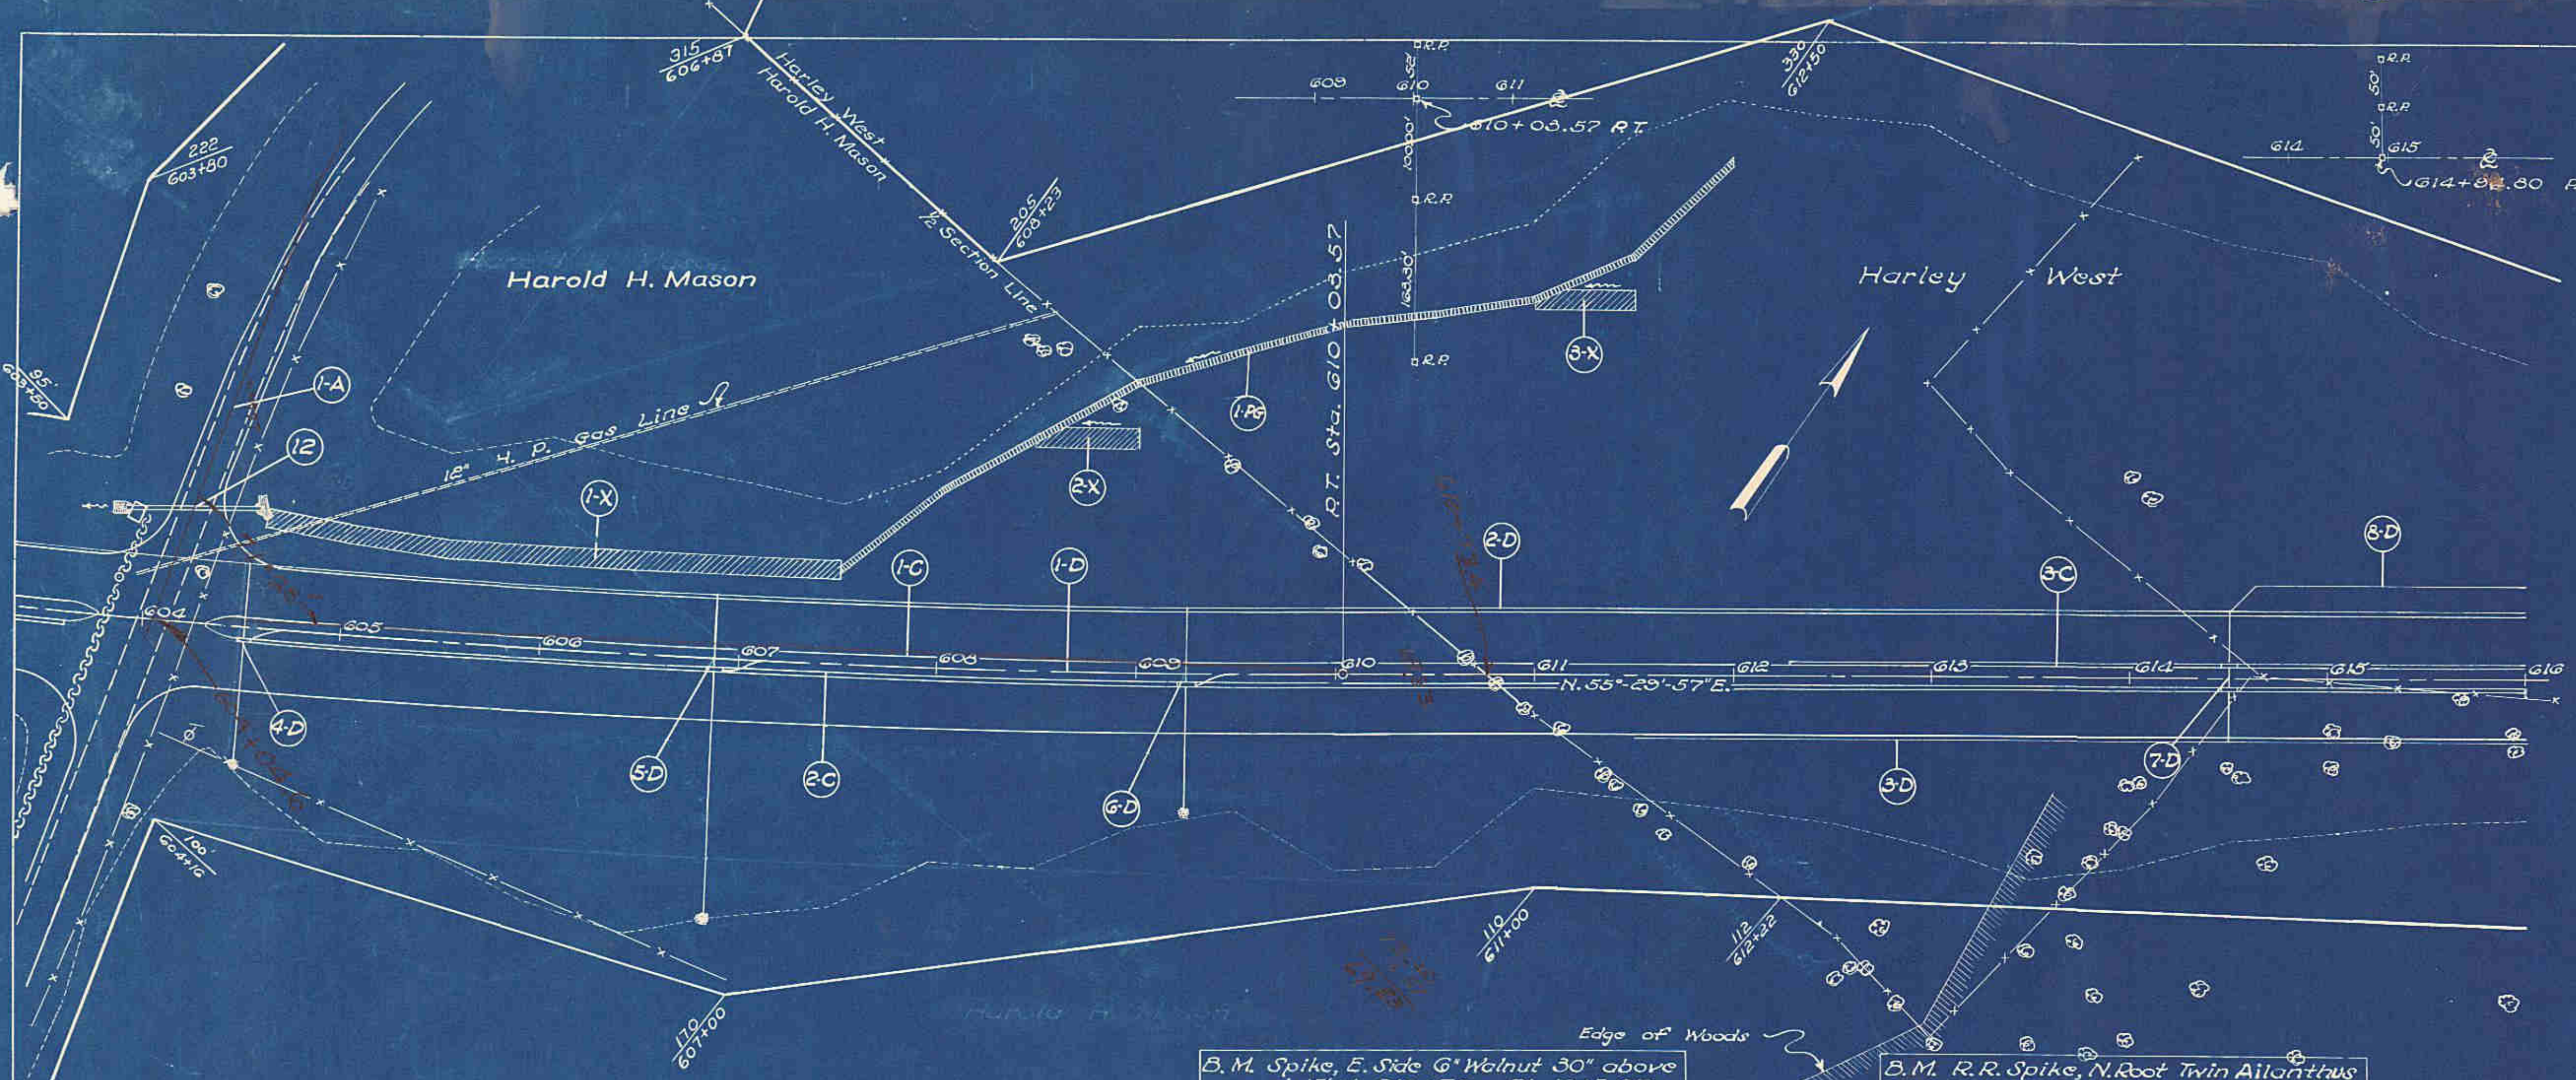


DRIVES & APPROACHES (A)						
Item No.	Station	Side	Type	5" R.P.C. Pavement Sq. Yds.	Type 4-A Int. Curb Lin. Ft.	1-17 Aggregate Cu. Yds.
1-A	604+04.6	Rt.		486.99	71.88	340
Totals				486.99	71.88	340

CURB & GUTTER (C)				
Item No.	Station From	Station To	Type 4 Comb. Curb & Gutter Lin. Ft.	Type 4-A Integral Conc. Curb - Lin. Ft.
1-C	604+47.04	612+28.57	Lt.	781.53
2-C	604+47.04	616+00	Rt.	1152.96
3-C	612+28.57	616+00	Lt.	371.43
Totals			1524.39	781.53

GUARD RAIL (G)				PAVED GUTTER (PG)			
Item No.	Station From	Station To	Side New Lin. Ft.	Item No.	Station From	Station To	Side Type 1 Lin. Ft.
				1-PG	607+50	612+00	Lt. 505
Totals				Total			

STRUCTURES 20' SPAN & UNDER						
Struct. No.	Station	Type	Present Size Length	Proposed Type	Proposed Size Length	Details on Sheet
12	604+04.6	Lt.		Pipe	24" 68'-0"	173

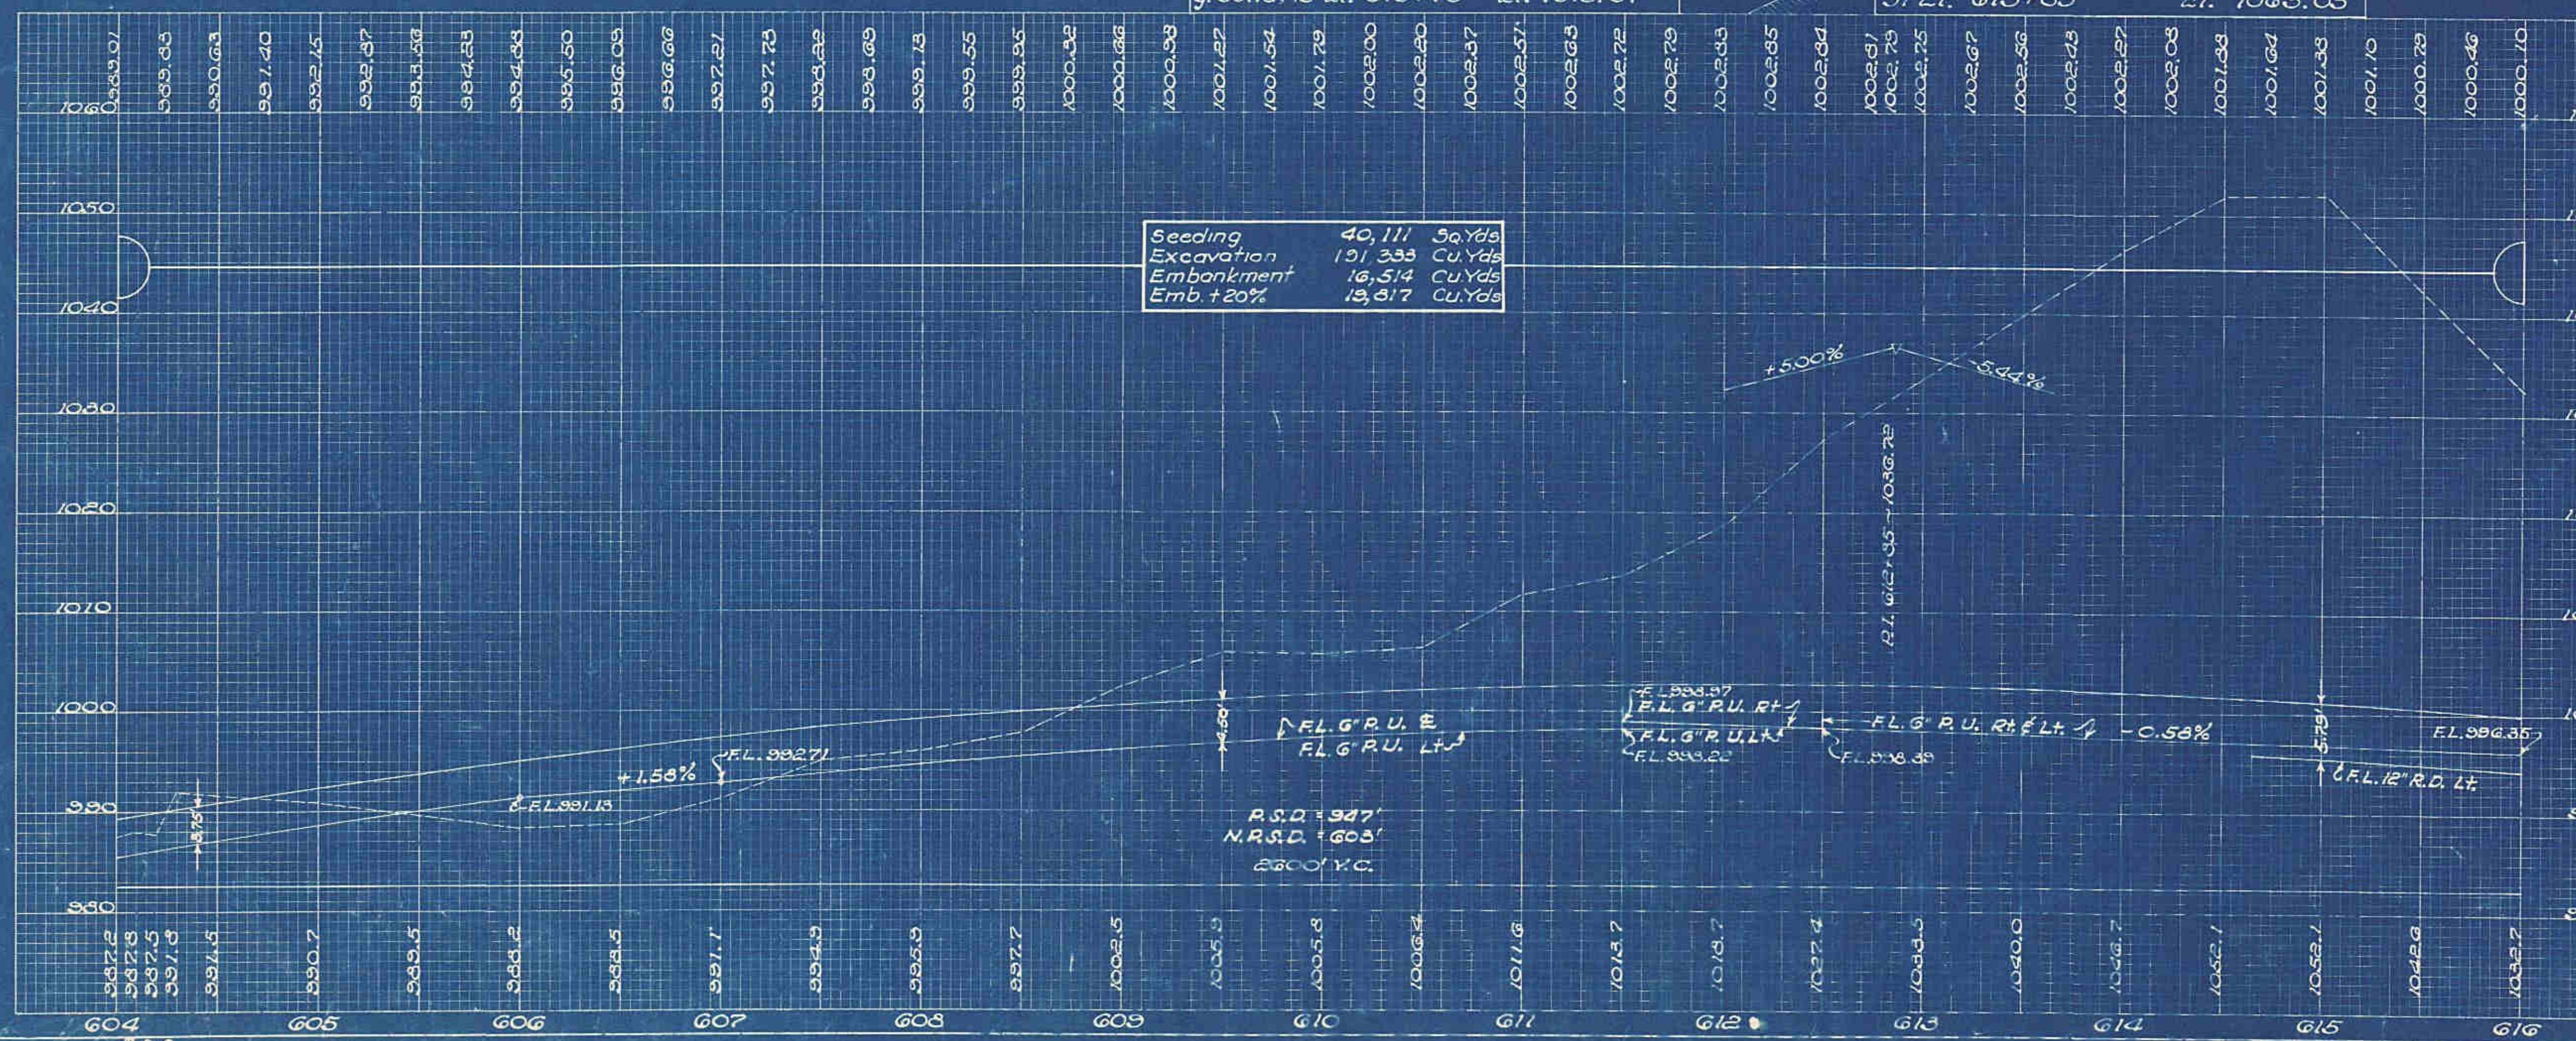

DRAINAGE (D)																		
Item No.	Station		Side	Stk #3 C. B. Units	12" Pies for S.S. Under Pav't. Lin. Ft.	12" Outlet Pipe for S.S. Under Pav't. Lin. Ft.	12" Pies for S.S. Under Pav't. Lin. Ft.	12" Pies for S.S. Under Pav't. Lin. Ft.	12" Pies for S.S. Under Pav't. Lin. Ft.	12" Pies for S.S. Under Pav't. Lin. Ft.	12" Pies for S.S. Under Pav't. Lin. Ft.	12" Pies for S.S. Under Pav't. Lin. Ft.	12" Pies for S.S. Under Pav't. Lin. Ft.	12" Pies for S.S. Under Pav't. Lin. Ft.	12" Pies for S.S. Under Pav't. Lin. Ft.	12" Pies for S.S. Under Pav't. Lin. Ft.	12" Pies for S.S. Under Pav't. Lin. Ft.	12" Pies for S.S. Under Pav't. Lin. Ft.
	From	To																
1-D	604+00	611+50	E															
2-D	604+00	610+00	Lt.															
3-D	611+50	616+00	Rt.															
4-D	604+52		Rt.	1	62	40	1	62	40	1	62	40	1	62	40	1	62	40
5-D	606+38		Rt.	1	62	40	1	62	40	1	62	40	1	62	40	1	62	40
6-D	609+25		Rt.	1	62	40	1	62	40	1	62	40	1	62	40	1	62	40
7-D	614+50		Lt.	2	82			82			82			82			82	
8-D	614+65	616+00	Lt.															
Totals				5	268	173	5	268	173	5	268	173	5	268	173	5	268	173

SODDING (X)				
Item No.	Station From	Station To	Side	Details on Sheet
1-X	604+00	611+50	Lt.	289
2-X	609+50	616+00	Lt.	46
3-X	611+50	616+00	Lt.	46
Totals				381