
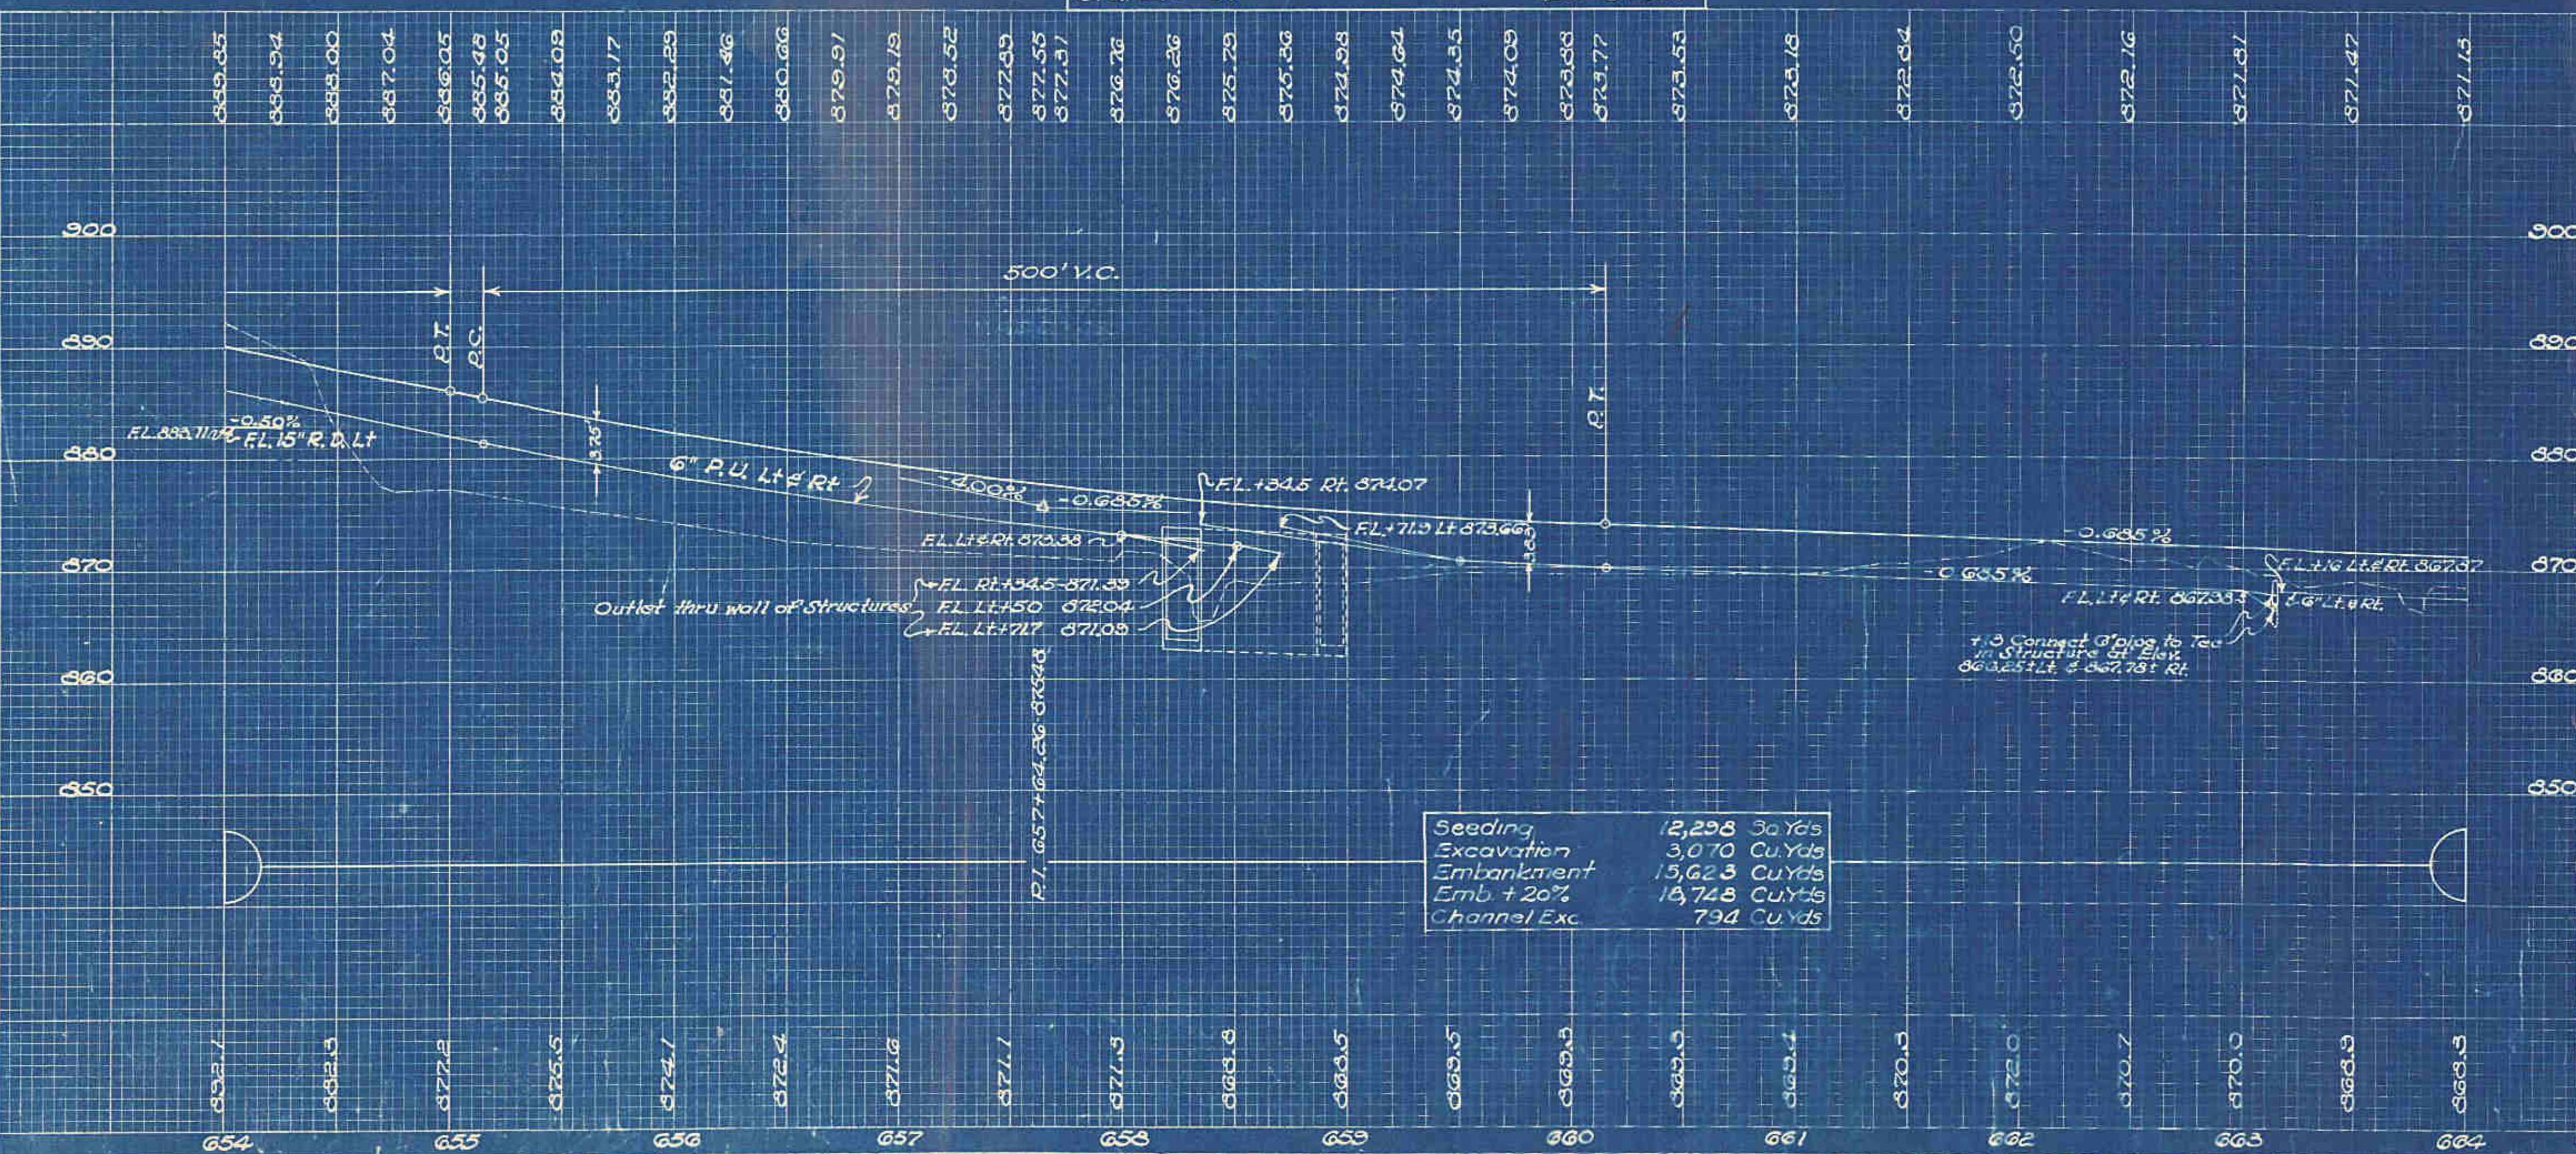


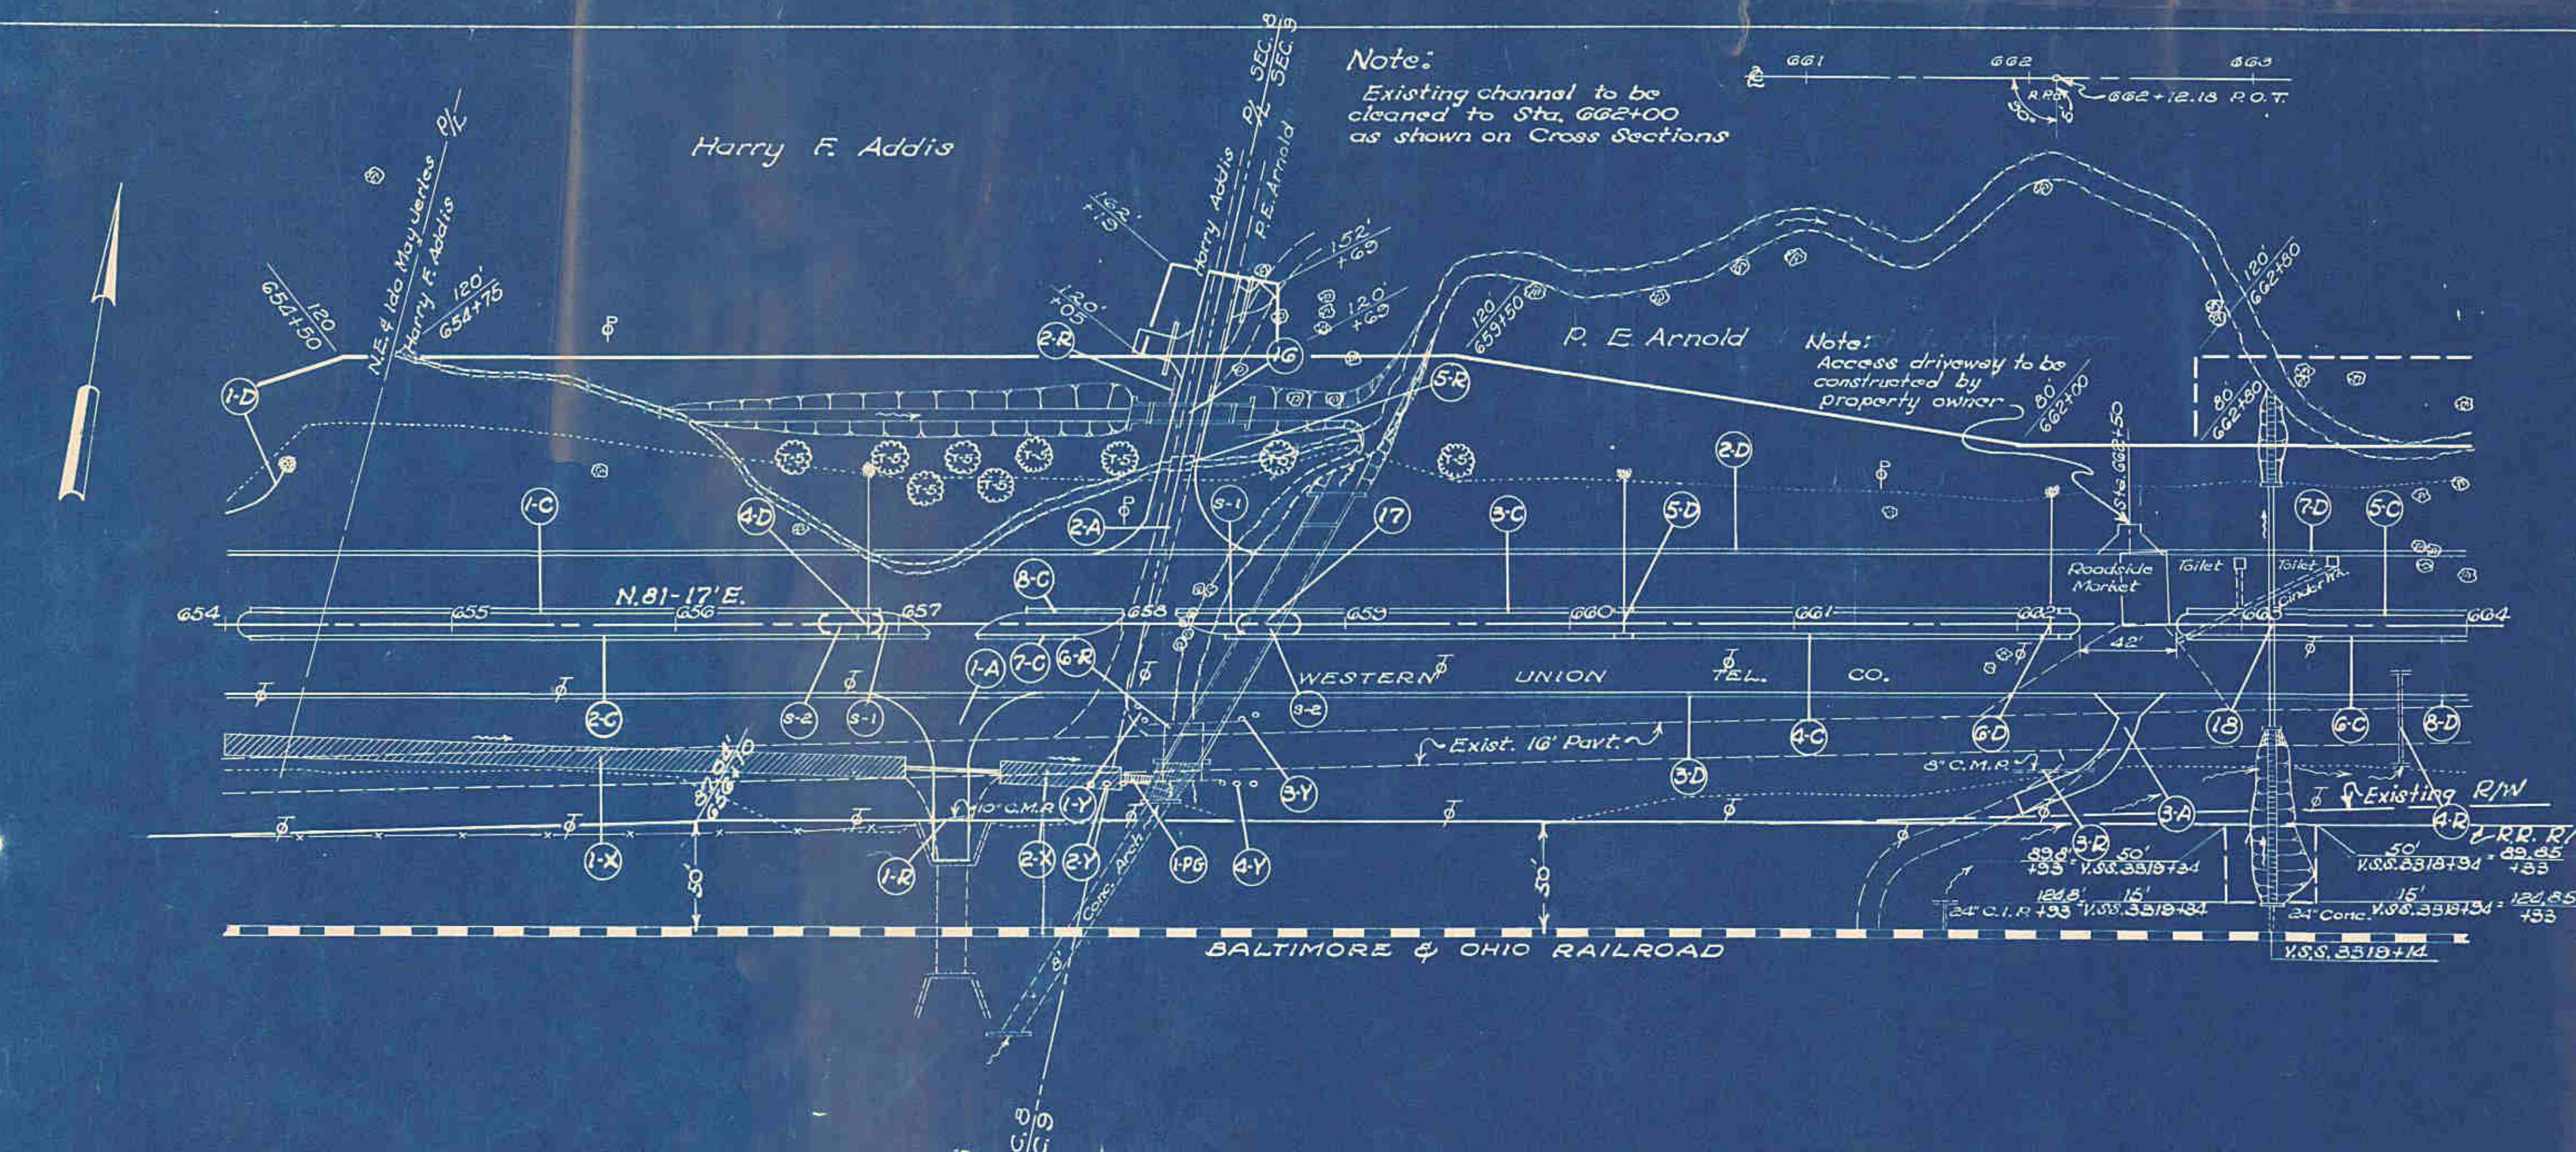

CURB REMOVAL			
Station	From	To	Side
654+00	658+19		Rt.
658+39	664+00		Lt.
Total			1960

PAVEMENT REMOVAL			
Station	From	To	Side
654+00	658+19		Rt.
658+39	664+00		Lt.
Total			1633

GUARD RAIL REMOVAL (Y)			
Item No.	Station	From	To
1-Y	658+07	658+10	Rt.
2-Y	657+36	658+08.6	Rt.
3-Y	658+46.3	658+61.2	Rt.
4-Y	658+44.4	658+59.3	Rt.
Total			62.9

SODDING (X)			
Item No.	Station	From	To
1-X	654+00	657+04	Rt.
2-X	657+06	658+00	Rt.
Total			358

PAVED GUTTER (PG)			
Item No.	Station	From	To
1-PG	658+00	658+15	Rt.
Total			15

DRIVES & APPROACHES (A)							
Item No.	Station	Side	Type	9" R.P.C.C. Pavement Sq. Yds.	Types 4-A Int. Curb Lin. Ft.	1-17 Aggregate Drives Lin. Ft.	Pipes for 12" Drives Lin. Ft.
1-A	657+24	Rt.	2	262.39	109.84	11	42
2-A	658+05.76	Lt.	2	151.33		29	48
3-A	662+50	Rt.	3	73.72	32.93	11	
Totals				487.44	142.82	51	90

DRAINAGE (D)							
Item No.	Station	From	To	Side	14" 312" Pipe for S.S. Outlet for R.U. Type 'A'	12" 312" Pipe for S.S. Drain for R.U. Type 'A'	15" 312" Pipe for S.S. Drain for R.U. Type 'A'
1-D	654+00	654+25	Lt.			20	10
2-D	654+00	663+13	Lt.			313	
3-D	654+00	663+13	Rt.			313	
4-D	656+86			2	34	34	
5-D	660+24			2	34	32	
6-D	662+15			2	34	24	
7-D	663+16	664+00	Lt.			32	
8-D	663+16	664+00	Rt.			34	
Totals				6	102	90	20

ITEM L-13 PLANTING SHRUBS			
Key	Scientific Name	Common Name	Size
S-1	Barberis thunbergii	Box Barberry	15-18 inch
S-2	Lonicera syringantha	Lilac Honeysuckle	2-3 Feet
S-3	Salix elegantissima	Thornless Willow	1/2-1 3/4 Cal. B&B Ball
ITEM L-14 PLANTING TREES			
Key	Scientific Name	Common Name	Size
T-1	Salix elegantissima	Thornless Willow	1/2-1 3/4 Cal. B&B Ball
T-2	Salix elegantissima	Thornless Willow	1/2-1 3/4 Cal. B&B Ball

FED. RD. DIVISION	STATE	PROJECT	FISCAL YEAR
2	OHIO	F-1(5)	

MUSKINGUM COUNTY
S.H. 1 SEC. 7
& NEW CONCORD (Pt.)

REMOVALS (R)				
Item No.	Station	Side	Struct. 20' Span & Under	Pipe 15' & Under
1-R	657+24	Rt.		20
2-R	657+36	Lt.		12
3-R	662+16	Rt.		34
4-R	663+72	Rt.	24' x 12' 1/2" S&B	
5-R	663+72	Lt.	6' x 5' Slab	
6-R	663+60	Rt.	18' x 8' Slab	
Total			3	66

STRUCTURES 20' SPAN & UNDER				
Struct. No.	Station	Type	Size	Length
16	658+00	Slab	6' x 5'	12'
17	658+60	Slab	18' x 8'	27'
18	663+12.5	Pipe	24"	105'

CURB & GUTTER (C)				
Item No.	Station	From	To	Side
1-C	654+11	656+31	Lt.	
2-C	654+11	657+13.96	Rt.	
3-C	658+23.96	662+23.5	Lt.	
4-C	658+46.32	662+23.5	Rt.	
5-C	662+76.5	664+00	Lt.	
6-C	662+76.5	664+00	Rt.	
7-C	657+34.04	657+78.77	Rt.	
8-C	657+57	658+01.73	Lt.	
Total				1695.54

RESET MILESTONE *	
Station	Side
660 ±	Lt.

* See Sheet No. 9