


MUSKINGUM COUNTY
S.H. 1 SEC. T
& NEW CONCORD (Pt.)

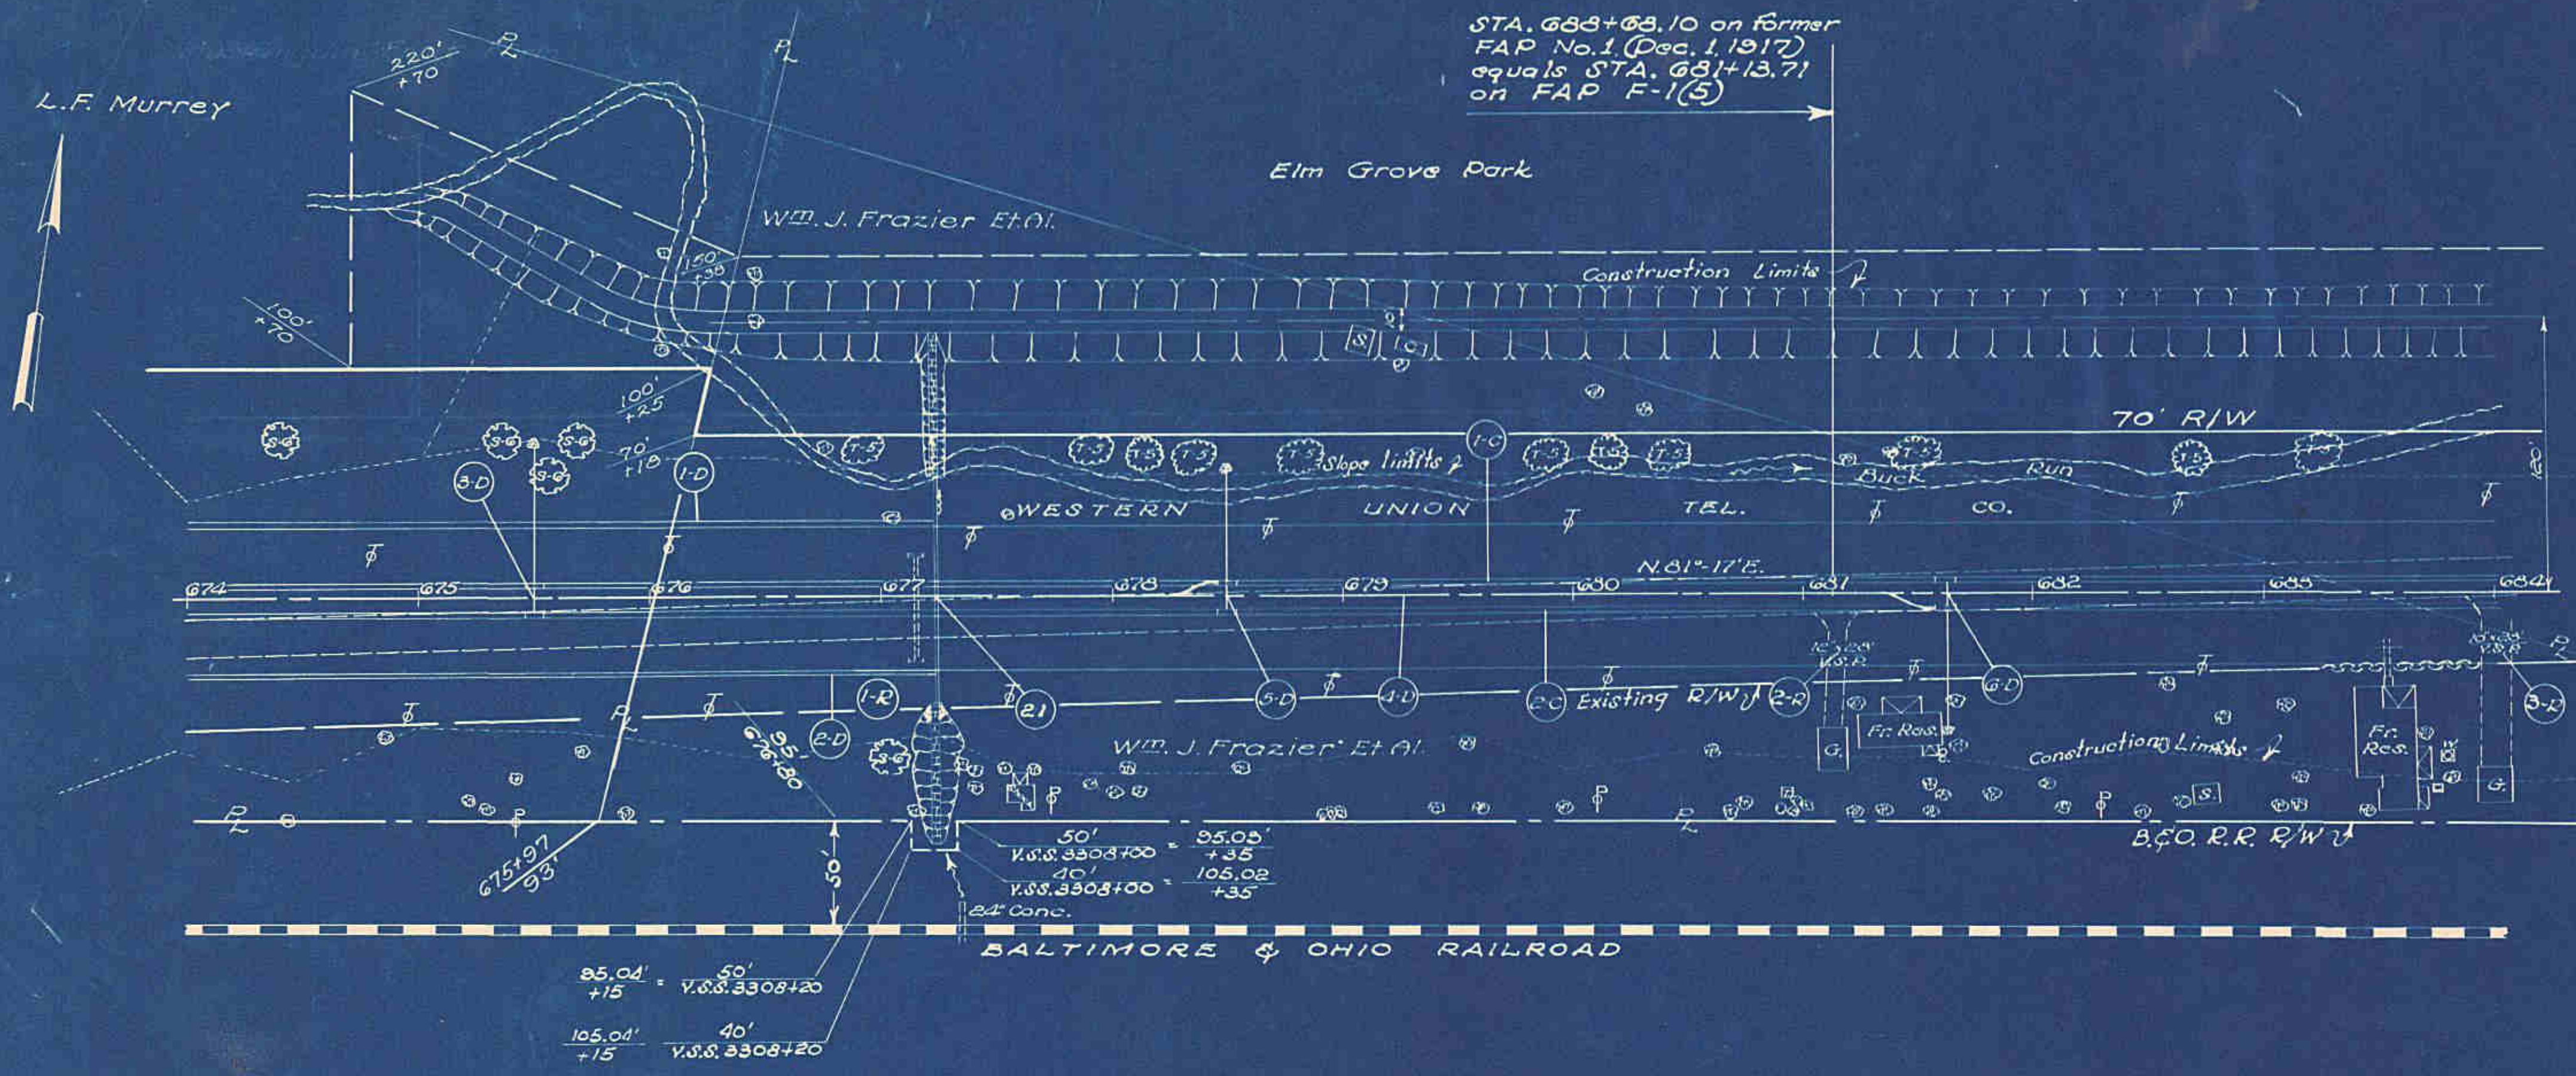

PAVEMENT REMOVAL		
Station	Rem. & Disp. of Exst. Bit. Surf. & Brick	
From	To	Incl. rolled stone base Sq. Yds.
674+00	684+00	1667
Total		1667


DRAINAGE (D)					
Item No.	Station	Side	Stk. 12" 12" 6" Pipe	12" 6" Pipe	Rip rap
	From	To	Units	Lin. Ft.	Sq. Yds.
1-D	674+00	677+24	Lt.		
2-D	674+00	677+24	Rt.		
3-D	675+50		2	34	34
4-D	677+24	684+00	2	34	674
5-D	678+50		2	34	24
6-D	681+50		2	34	24
Totals			6	102	1322

CURB REMOVAL		
Station	Side	Conc. Curb
From	To	Removed & Stored Lin. Ft.
674+00	684+00	2000
Total		2000

CURB & GUTTER (C)			
Item No.	Station	Side	Type & Comb. Curb & Gutter Lin. Ft.
	From	To	
1-C	674+00	684+00	Lt. 1000
2-C	674+00	684+00	Rt. 1000
Total			2000

REMOVALS (R)			
Item No.	Station	Side	Pipe Removed & Disposed of 15" under Lin. Ft.
1-R	677+25		
2-R	681+10	Rt.	23
3-R	684+00	Rt.	23
Total			51

STRUCTURES 20' SPAN & UNDER					
Struct. No.	Station	Type	Size	Length	Details
21	677+25	V.S.P. (enc)	15"	40'	Pipe 24" 58' 182

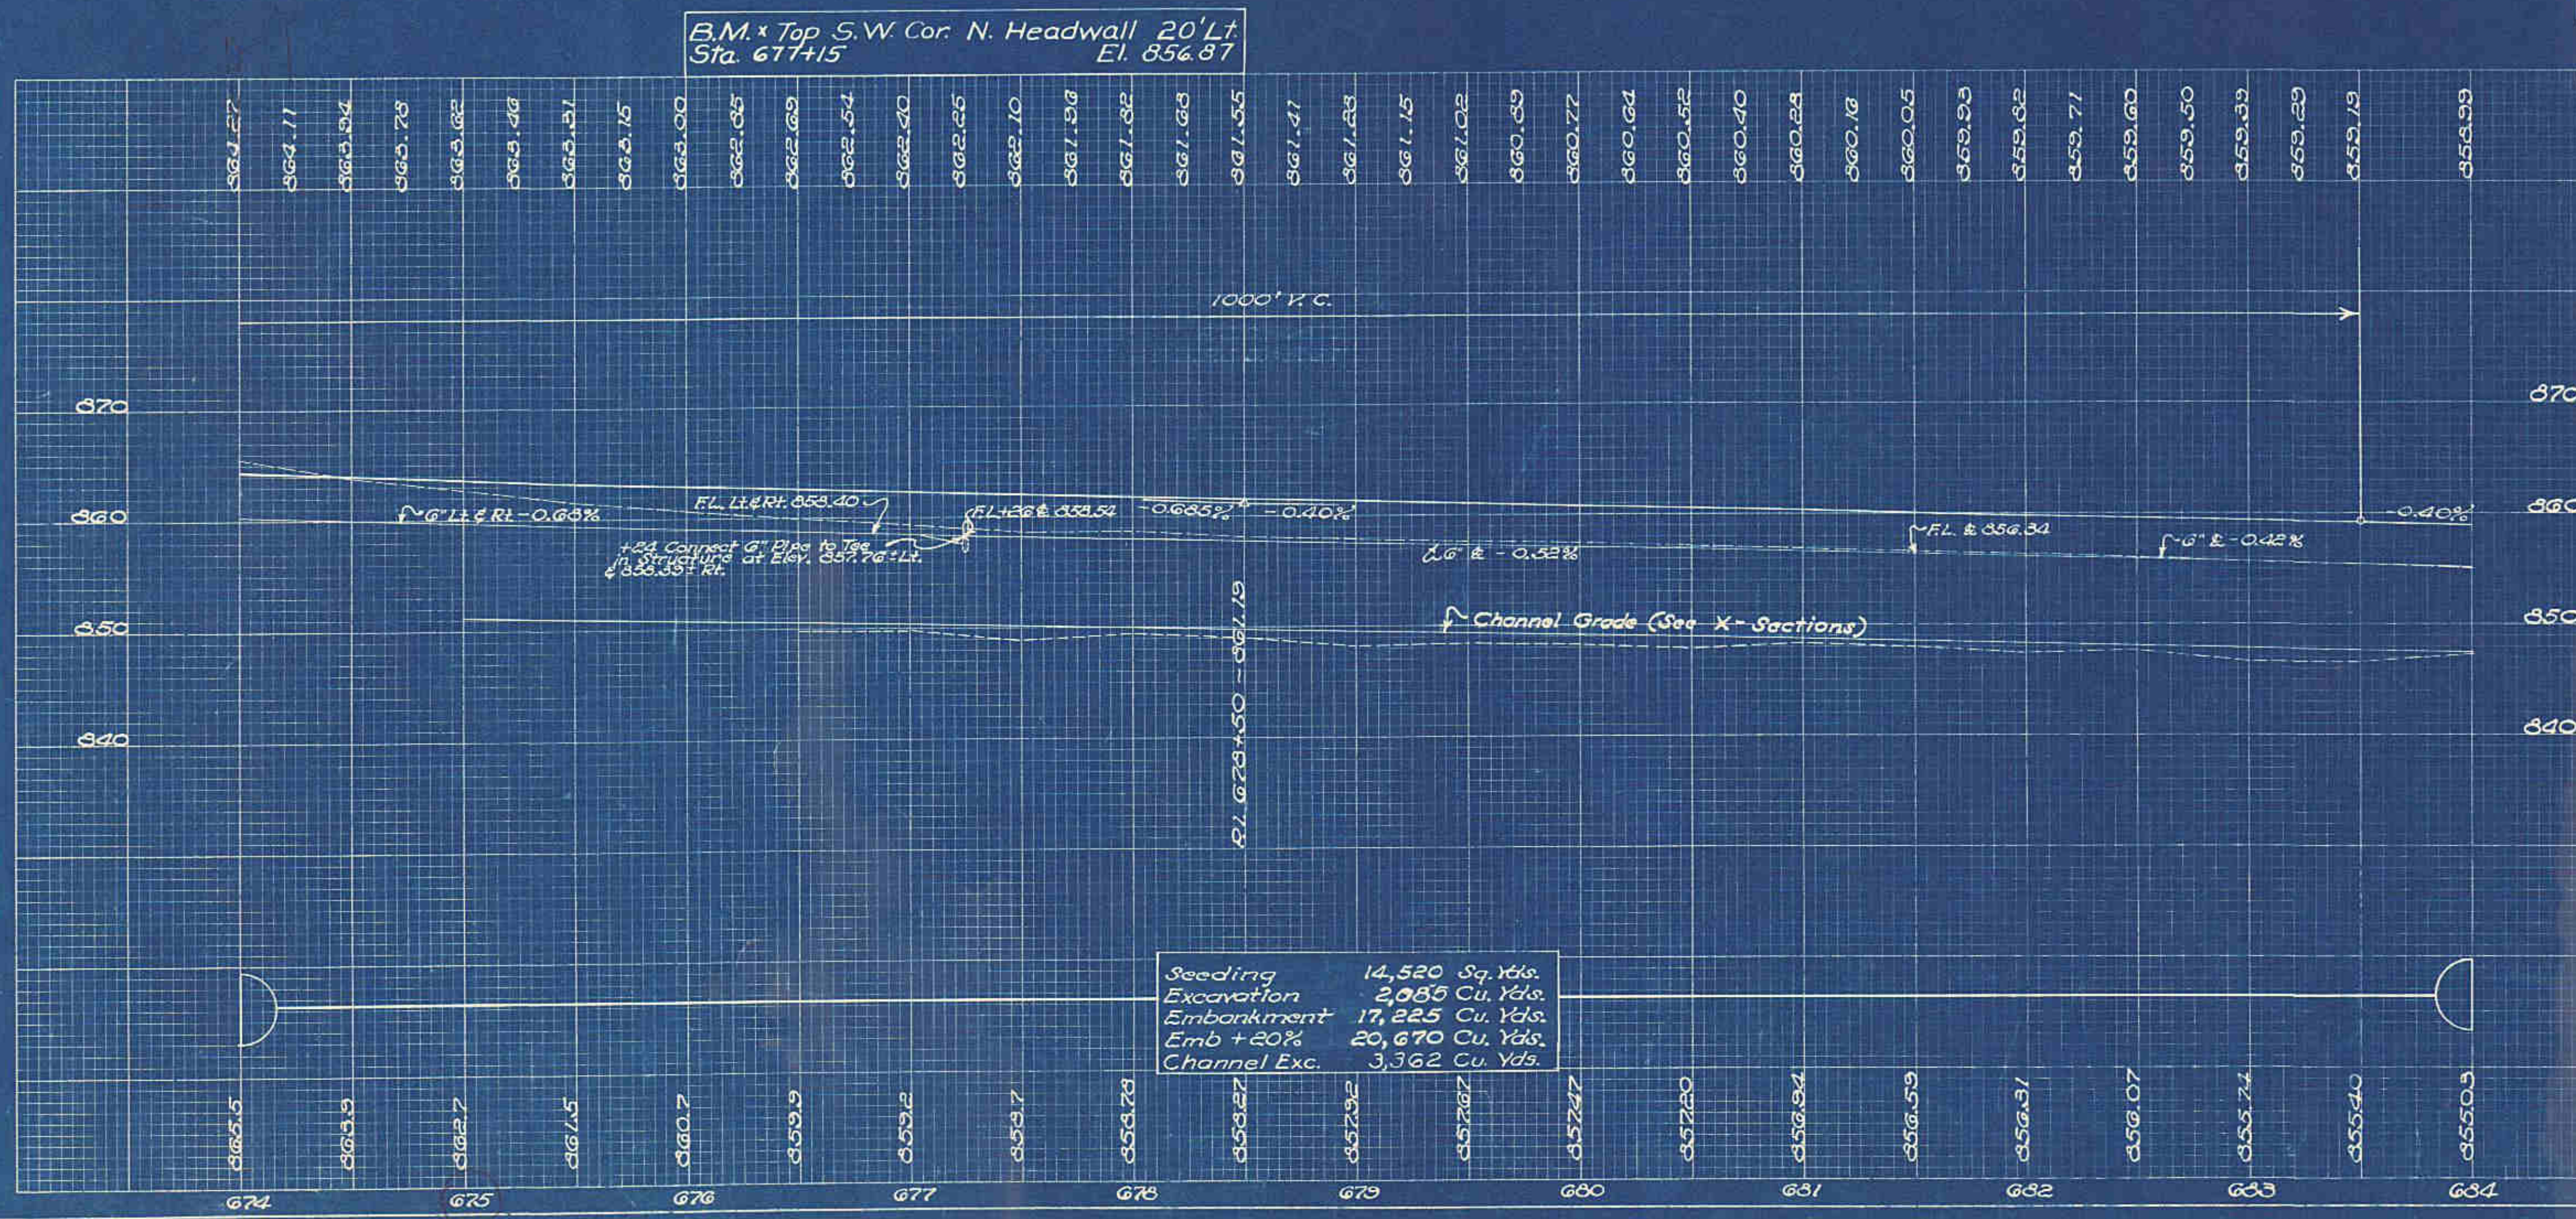

Seeding 14,520 Sq. Yds.
Excavation 2,055 Cu. Yds.
Embankment 17,225 Cu. Yds.
Emb + 20% 20,670 Cu. Yds.
Channel Exc. 3,362 Cu. Yds.

ITEM L-13 PLANTING SHRUBS				
Key	Scientific Name	Common Name	Size	Quantity
13	Salix alba (Incana)	Rosemary Willow	4-5 feet	5

ITEM L-14 PLANTING TREES				
Key	Scientific Name	Common Name	Size	Quantity
14	Salix elegantissima	Thornless Willow	1 1/2" - 1 3/4" Cal. B & B 27" Ball	11