


MUSKINGUM COUNTY S.H. 1 SEC. 7 & NEW CONCORD (P+)

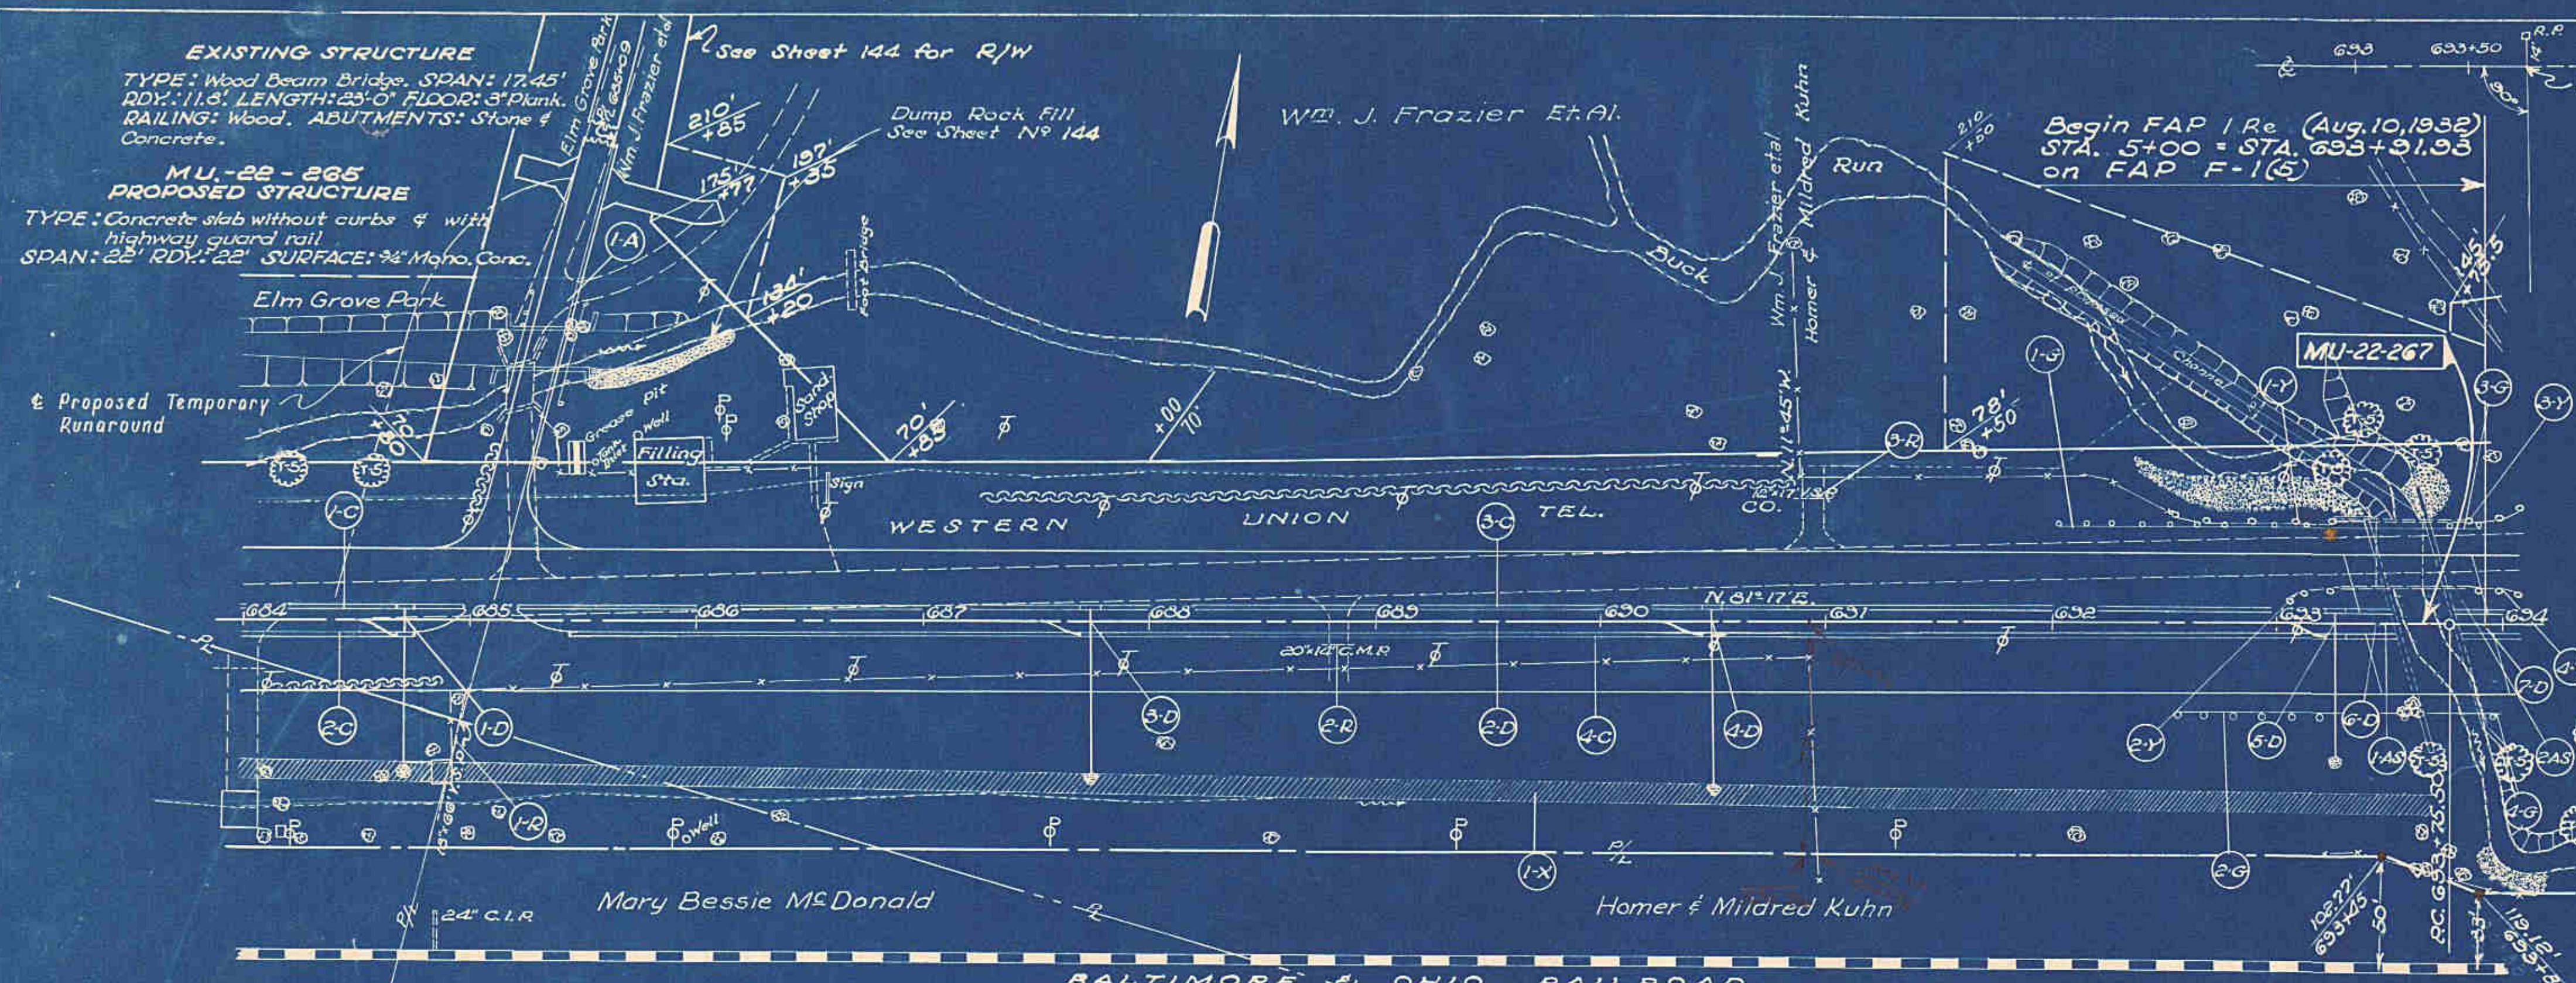

PAVEMENT REMOVAL

Station	Rem & Disp. of Exst. Bit. Surf. Brick incl. Rolled Stone Base	Sq. Yds.
From To		
692+00 693+43		236
693+64 694+00		60
Total		296

DRAINAGE (D)

Item No.	Station	Side	C.B.	12" Pipe for S.S. Under Pav't.	12" Pipe Outlet for P.U. for S.S. depth 28"	6" Pipe incl. fill for S.S. depth 28"	Riprap	Type
	From To		Units	Lin. Ft.	Lin. Ft.	Lin. Ft.	Sq. Yds.	A
1-D	684+71							
2-D	684+00 693+23	R	2	34	32		323	2
3-D	687+75		2	34	33			2
4-D	690+50		2	34	12			2
5-D	693+25		2	33	23			2
6-D	693+27 693+52	R				25		
7-D	693+31 694+00	R				19		
Totals			8	135	140	25	367	8

CURB REMOVAL

Station	Side	Concrete Curb Removed	Excavated Lin. Ft.
From To			
692+00 693+43			236
693+64 694+00			72
Total			308

DRIVES & APPROACHES											(A)
Item No.	Station	Side	Type	F. 17" R.P.C.C. Aggr. Curb Sq. Yds.	Type 4-A Int. Curb Lin. Ft.	4" Conc. Sidewalk Sq. Ft.	12" Pipe for Driver Exst. Lin. Ft.	Rem. & Store Exst. Pipe 15" under Lin. Ft.	Guard Rail Lin. Ft.	See Sheet	
1-A	685+02.30	Lt.	C	100	223.62	54.92	696	18	32	51	144
Totals				100	223.62	54.92	696	18	32	51	

CURB & GUTTER (C)

Item No.	Station	Side	Type	4" Comb. Curb & Gutter Lin. Ft.
1-C	684+00 684+98.25	Lt.		93.25
2-C	684+00 684+52.29	Rt.		75.29
3-C	685+31.47 685+32.02	Lt.		331.55
4-C	685+43.43 685+55.40	Rt.		311.97
5-C	693+77.62 694+00	Lt.		22.38
6-C	693+80.96 694+00	Rt.		19.04
Total				1858.48

REMOVALS (R)

Item No.	Station	Side	Remove & Dispose of Exst. Pipe 15" Under 15" Lin. Ft.	Remove & Store Exst. Pipe Over 15" Lin. Ft.
1-R	684+90	Rt.	66	
2-R	683+85	Rt.		14
3-R	690+25	Lt.		17
Totals			66	17

GUARD RAIL (G)

Item No.	Station	Side	New Lin. Ft.
1-G	692+02.57 693+42.91	Lt.	140.34
2-G	692+55.43 693+64.51	Rt.	109.08
3-G	693+68.49 693+80.07	Lt.	21.58
4-G	693+80.00 694+00	Rt.	32.1
Total			283.01

SODDING (X)

Item No.	Station	Side	Location	Sq. Yds.
1-X	684+00 693+75	Rt.	Sid. Ditch	975
Total				975

GUARD RAIL REMOVAL (Y)


Item No.	Station	Side	Remove Ex. G.R. Lin. Ft.
1-Y	692+53.5 693+34.7	Lt.	71.2
2-Y	693+03.5 693+27	Rt.	23.5
3-Y	693+33.4 694+00	Lt.	16.6
4-Y	693+33 694+00	Rt.	17.0
Total			128.3

APPROACH SLABS (AS)

Item No.	Station	Sq. Yds.
1-AS	693+38.71 693+53.71	60
2-AS	693+73.37 693+94.23	60
Total		120.0

ITEM L-14 PLANTING TREES

Key	Scientific Name	Common Name	Size	Quantity
(T)	Salix elegantissima	Thornless Willow	1 1/2" Cal. 5' x 8' 2" Ball	9

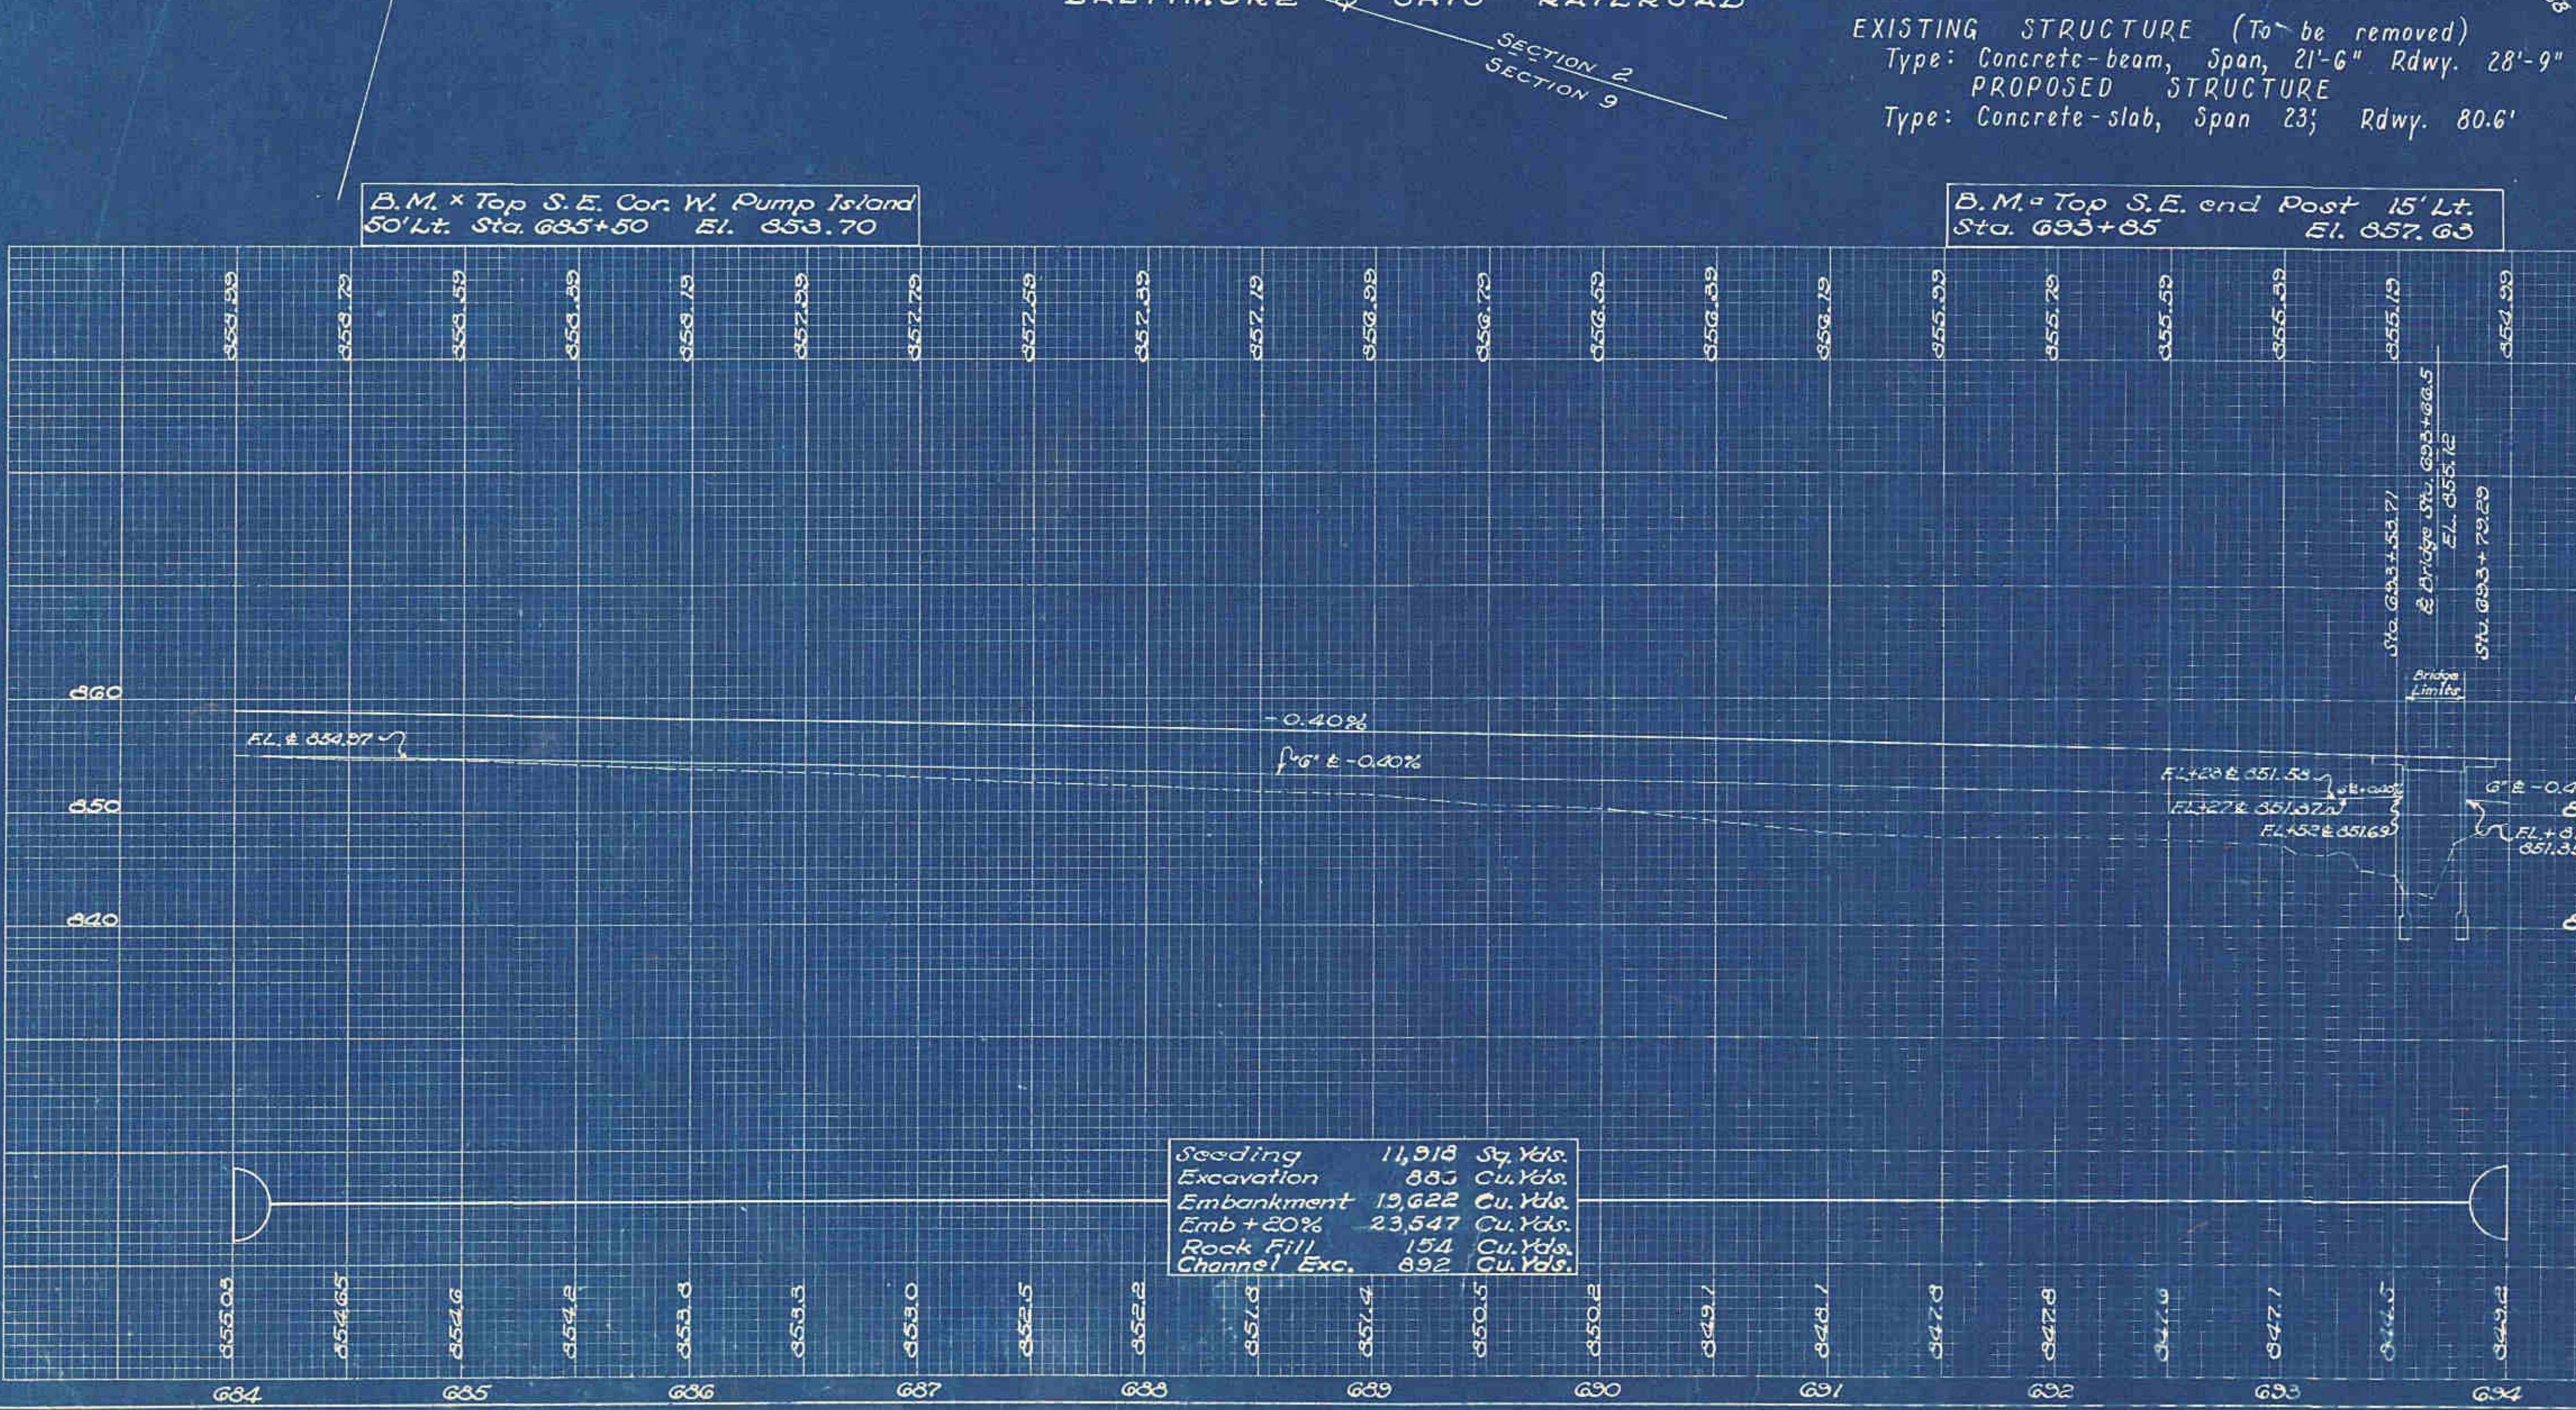

Seeding 11,913 Sq. Yds.
Excavation 885 Cu. Yds.
Embankment 19,622 Cu. Yds.
Emb + 20% 23,547 Cu. Yds.
Rock Fill 154 Cu. Yds.
Channel Exc. 892 Cu. Yds.