

MUSKINGUM COUNTY
S.H. 1 SEC. T
& NEW CONCORD (Pt.)

TYPICAL SECTION EXISTING PAVEMENT
TRAFFIC BOUND MACADAM
BITUMINOUS TREATED
FROM STA. 694+00 TO STA. 705+50

Station		Side	Sta. No. 3 C.D.	12" Pipe for Storm Sewer under Pavement Lin. Ft.	12" Outlet Pipe for Storm Sewer Lin. Ft.	6" Pipe for Pipe U. incl. full depth P.B. Lin. Ft.	Rip rap Type "A" Sq. Yds.
Item No.	From To						
1-D	694+00 704+00	E				1000	
2-D	697+13		2	30	36		2
3-D	700+00		2	31	34		2
4-D	703+00		2	28	52		2
Totals			6	89	122	1000	6


Station		Side	Type	5" R.P.C.C. Pavement Sq. Yds.	Type 4-A Int. Curb Lin. Ft.	1-17 Aggregate Cu. Yds.	12" Pipe for Drives Lin. Ft.	
Item No.	From To							
1-A	697+45	Lt.	3	50.99	20.14	57	80	See X Sect.
2-A	697+45	Rt.	3			3		See X Sect.
Totals				50.99	20.14	65	80	

Station		Side	Type 4 Comb. Curb & Gutter Lin. Ft.	Type 4-A Int. Conc. Curb. Lin. Ft.
Item No.	From To			
1-C	694+00 697+20.44	Lt.	320.44	
2-C	694+00 697+20.44	Rt.	320.44	
3-C	697+69.35 704+00	Lt.		630.65
4-C	697+69.35 704+00	Rt.		630.65
Total			640.88	1261.30

Item No.	Station	Side	Remove & Store Existing Pipe 15" or under Lin. Ft.
1-R	697+08.5	Lt.	20
Total			20

Item No.	Station	Side	New Lin. Ft.
1-G	694+00 695+12.93	Rt.	142.93
Total			142.93

Item No.	Station	Side	Remove Ex.G.R. Lin. Ft.
1-Y	694+00 694+06.8	Lt.	6.8
2-Y	694+00 694+06	Rt.	6
Total			12.8

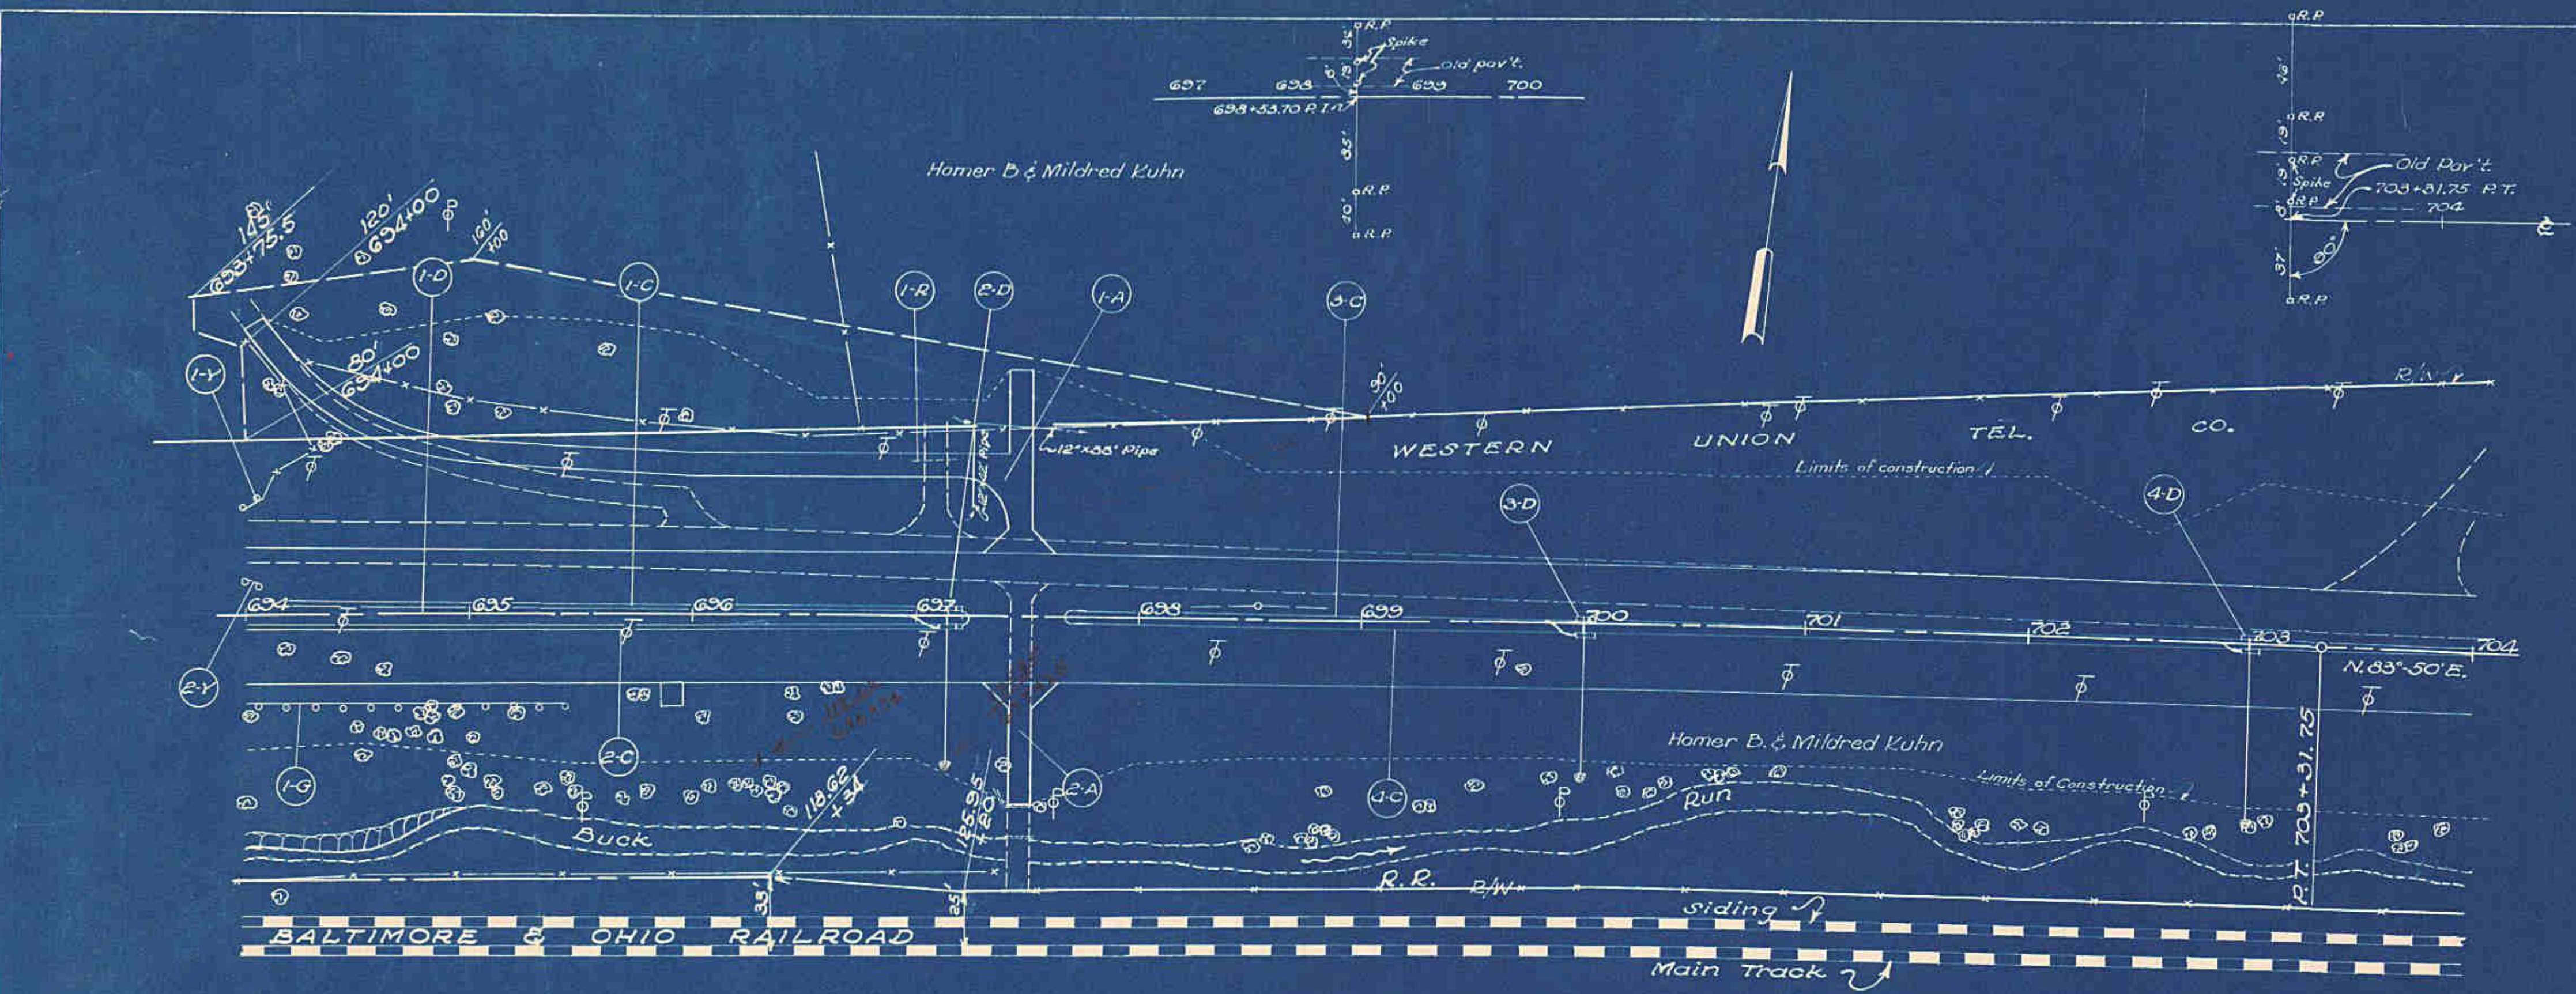

$P1 = 698+53.70$
 $\Delta = 2^\circ-33' Rt.$
 $D = 0^\circ-16'$
 $T = 473.20$
 $L = 256.25$
 $R = 2485.53$

See Sheet No. 37 for Merger from Sta. 691+50.86 to Sta. 705+56.40

