
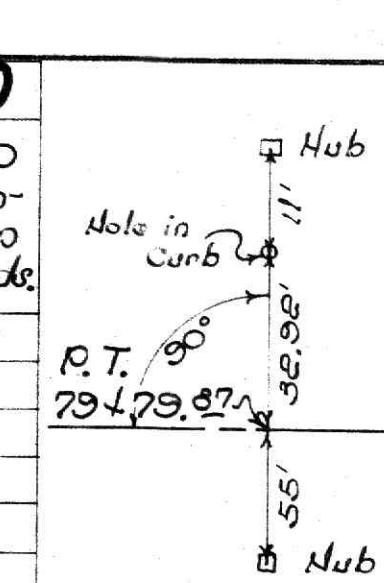
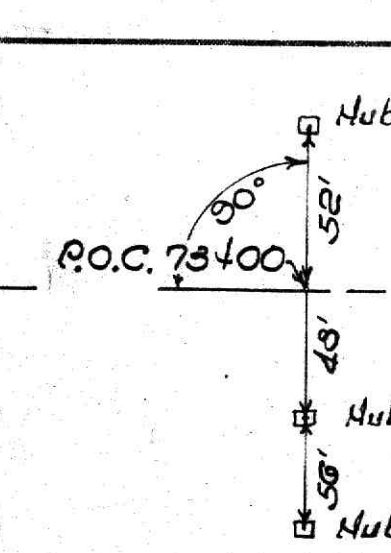
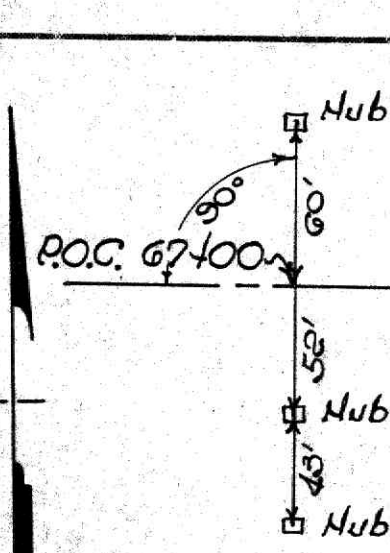
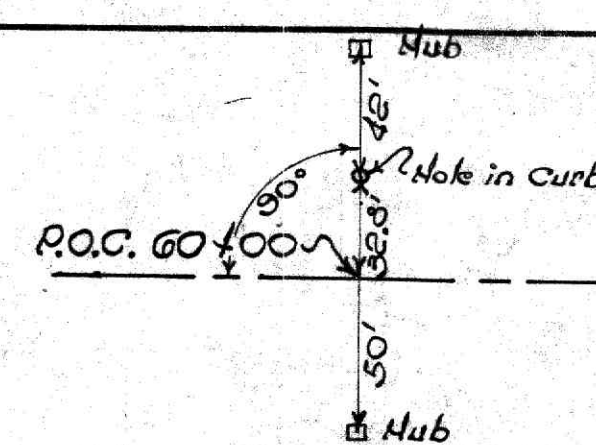


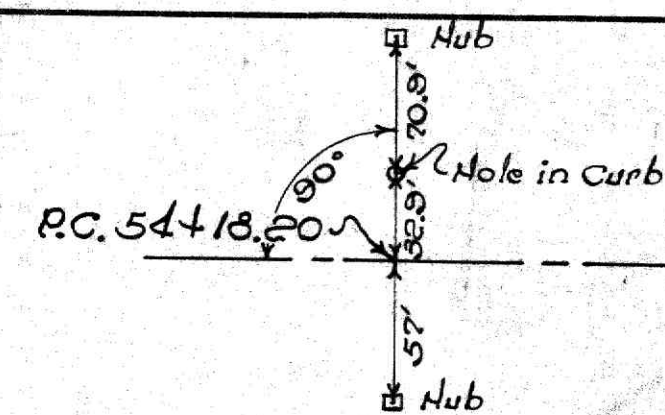

STORM SEWER


Ref. No.	Station	Pipe Size	Length	Material	Notes
1-8	52+50	24"	1	Mod.	
2-8	55+50	1	1	Mod.	
3-8	58+29	1	1	Mod.	
4-8	60+50	1	1	Mod.	
5-8	63+00	1	1	Mod.	
6-8	65+50	1	1	Mod.	
7-8	68+30	2	1	24"	30'
8-8	70+50	1	1		
9-8	73+00	1	1		
10-8	75+50	1	1		
11-8	79+00	2	1	24"	14' 16' 12' 2'
Total			5	7	82

FED. RD. DIVISION	STATE	PROJECT	TYPE FUNDS
S	OHIO		

MUS. 22 (27.81-27.83)
GUE. 22 (0.00-3.91)

Note: See Sheet No 23 for location and quantities for Concrete Curb, Combination Curb and Gutter, and Curb Removal.

P.I. = 67+20.76
Δ = 25°37' L.
D = 1°00'
T = 1302.56'
L = 2551.67'
R = 5723.50'
E = 146.20'

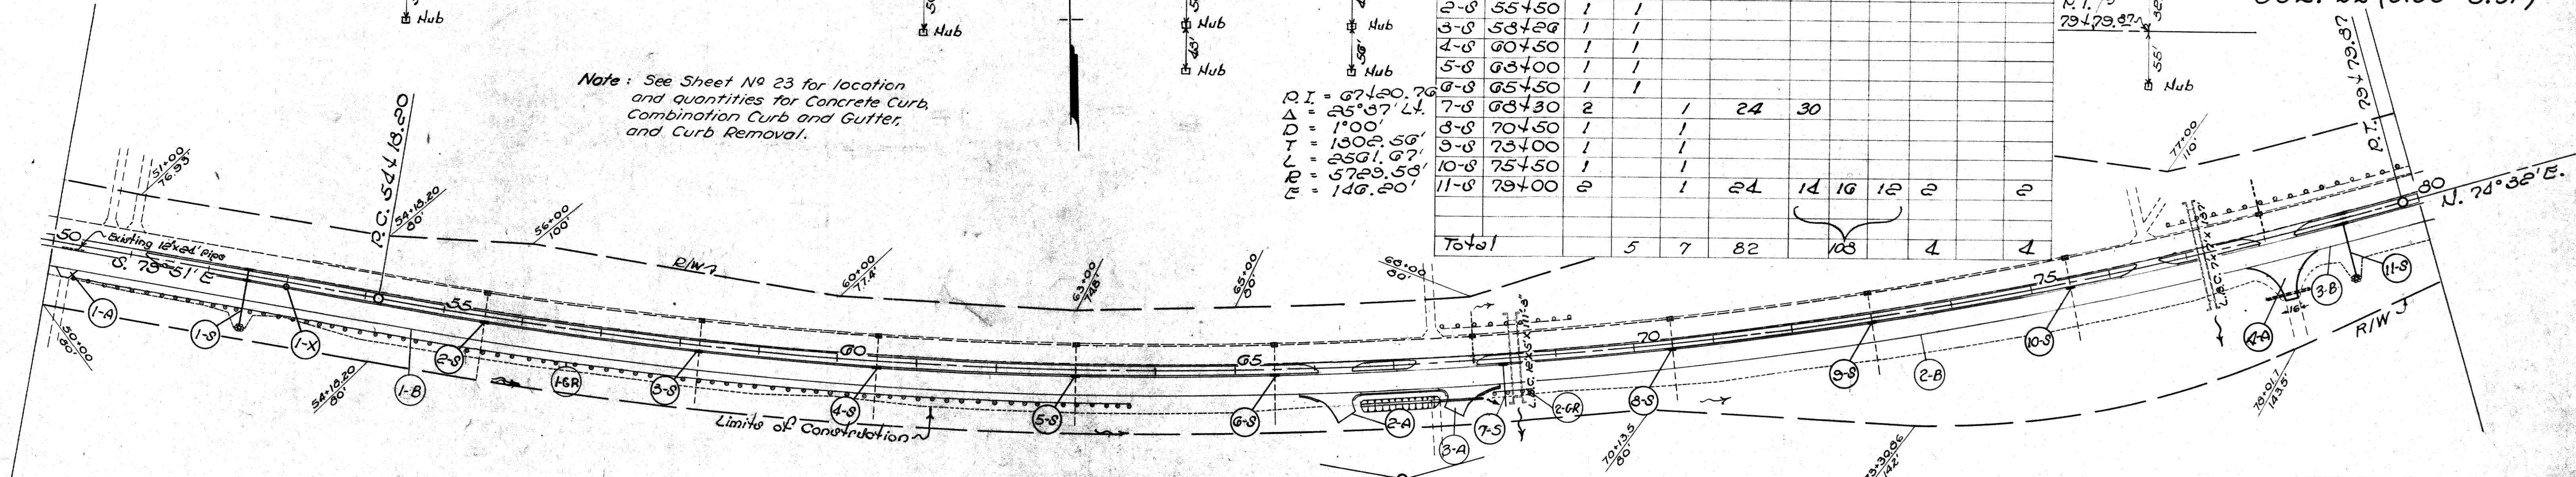

Ref. No.	Station	I-17 Aggregate
1-B	50+00 to 65+80.5	117
2-B	68+29.5 to 77+69.15	70
3-B	78+60.85 to 80+00	11
Total		198

Ref. No.	Station	I-15,12 Flexible Plate Roll Lin. Ft.
1-GR	50+25 to 63+69	1344
2-GR	68+21 to 68+69	48
Total		1,392


Station	T-70 Opening 9" R.C.C. Pav. Sq. Yds.	S-5-5 Classified Emb. Cu. Yds.
50+00 to 51+41	198.4	33.1
63+82 to 66+76	88.6	14.8
67+12 to 68+26	128.2	21.4
76+12 to 76+88	74.5	12.4
77+69 to 78+61	88.7	14.8
Total	578.4	96.5

Ref. No.	Station	Side	T-70 9" R.C.C. Pav. Sq. Yds.	S-5-5 Classified Emb. Cu. Yds.	I-17 Aggregate Cu. Yds.	I-12 Types 2-A Conc. Curb Lin. Ft.	E-12 Rem. & Dis. Ex. Pipe Lin. Ft.	I-1 Pipe for Drives Lin. Ft.	Detail on Sheet No.
1-A	50+11.32	Rt.			2.5		24		X-Sects
2-A	66+30	Rt.	59.1	10.7	8.6	43.0			X-Sects
3-A	67+80	Rt.	59.1	10.7	8.6	43.0		62'	X-Sects
4-A	78+15	Rt.	211.2	38.6		104.2			5
Total			329.4	60.0	19.7	190.2	24	62	

CATCH BASIN (Abandoned X)

Ref. No.	Station	I-16 Catch Basin or Inlet - Abandoned Unit	Detail on Sheet No.
7-X	53+00	1	
Total		1	

* Pipes to be sealed

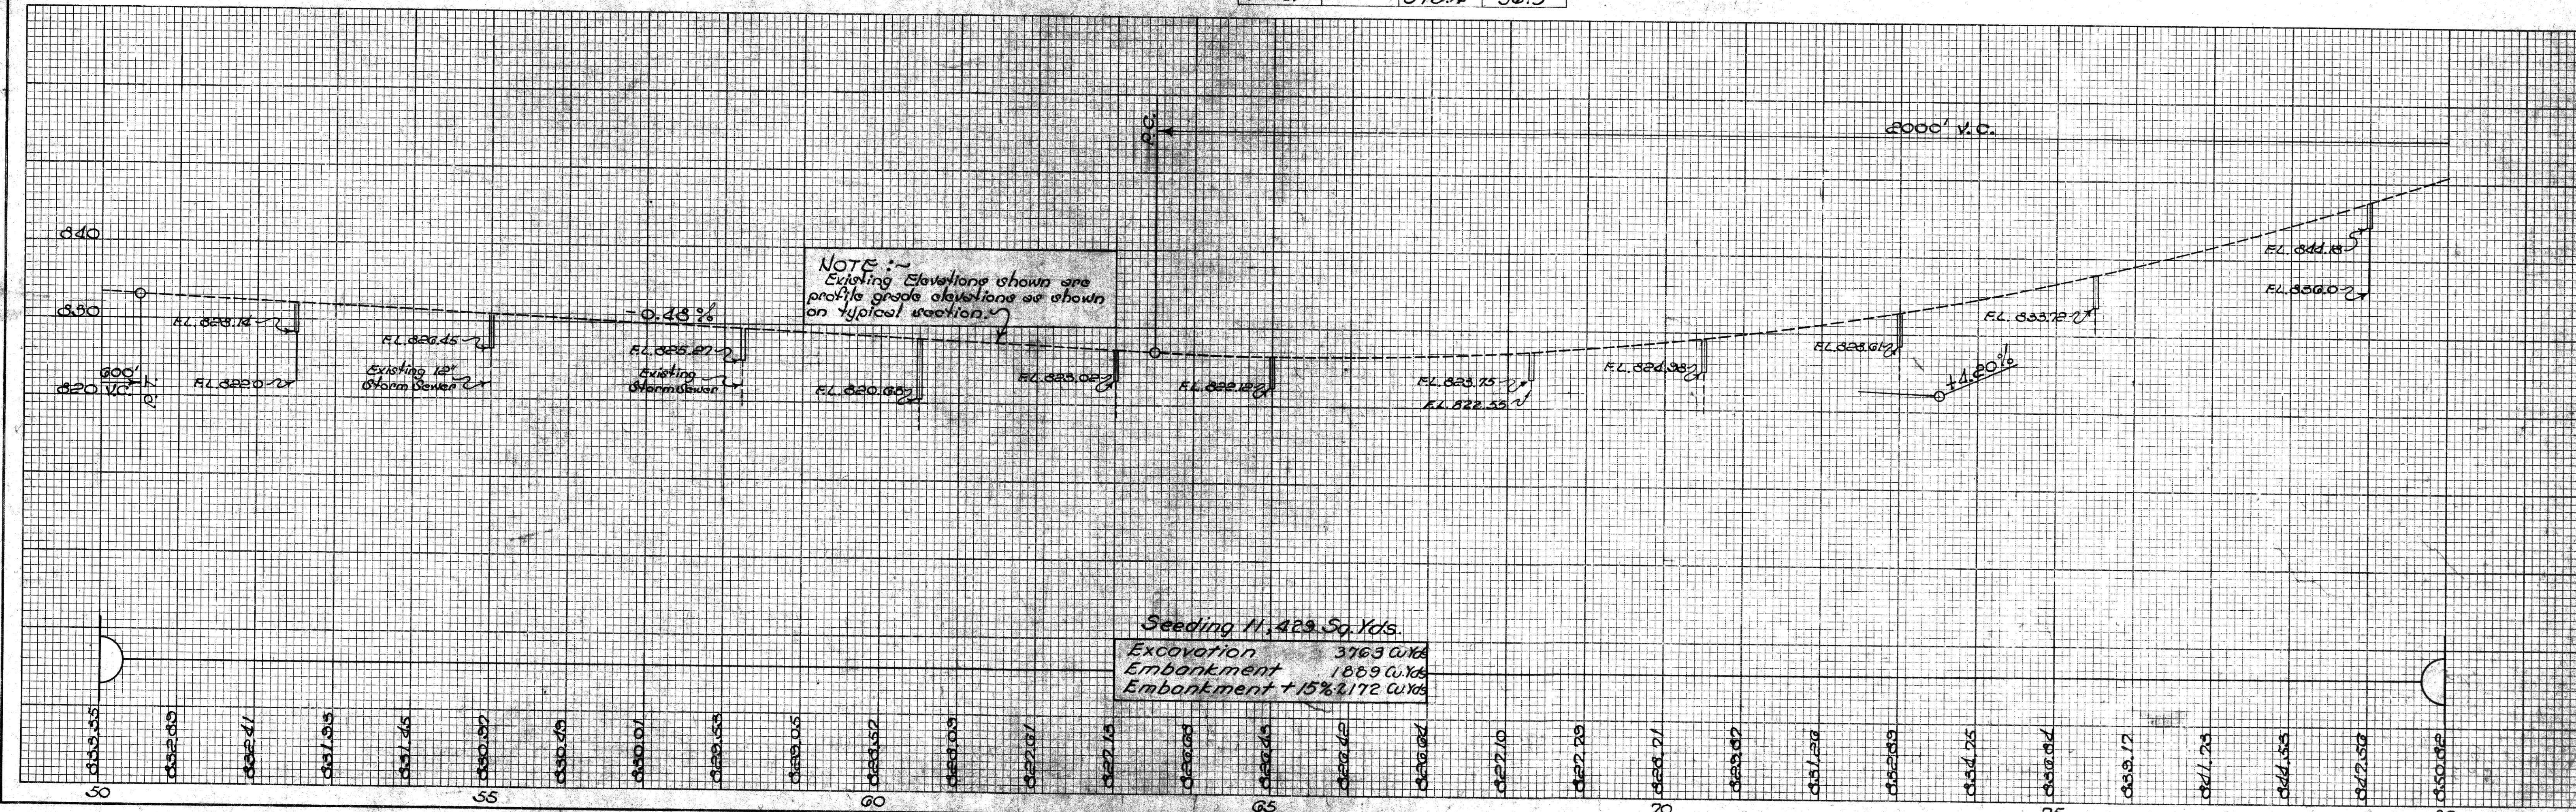

NOTE: Existing Elevations shown are profile grade elevations as shown on typical section.

Seeding 11,429 Sq. Yds.

Excavation 3763 Cu. Yds.
Embankment 1869 Cu. Yds.
Embankment + 15% 2172 Cu. Yds.

50+00 to 80+00