


Note: See Sheet No 23 for location and quantities for Concrete Curb, Combination Curb and Gutter, and Curb Removal.

STORM SEWER									
Ref. No.	Station	Size - 48" No.	I-3 Catch Basin - Unit	I-2 12" Pipe Under Pavt. Lin. Ft.	I-2 12" Pipe - Lin. Ft.	I-5 Pipe Special Unit	I-10 Pipe		
1-8	81+00	5	1		14				
2-8	83+00	4	2	34					
3-8	85+50	1	2						
4-8	88+50	4	2	34					
5-8	92+50	5	2	34	16				
6-8	96+50	5	2	34	16				
7-8	100+00	5	2	34	16				
8-8	103+50	1	2						
9-8	106+50	1	2						
10-8	Approach	2		1	3				
Total			17	170	70		4		

MUS. 22 (27.81-27.83)
GUE. 22 (0.00-3.91)

CATCH BASIN Abandoned (X)				
Ref. No.	Station	I-16 Catch Basin or Inlet - Abandoned	Unit	Unit
1-X	85+50			
2-X	91+46			
3-X	97+50			
4-X	103+50			
5-X	109+50			
Total				5

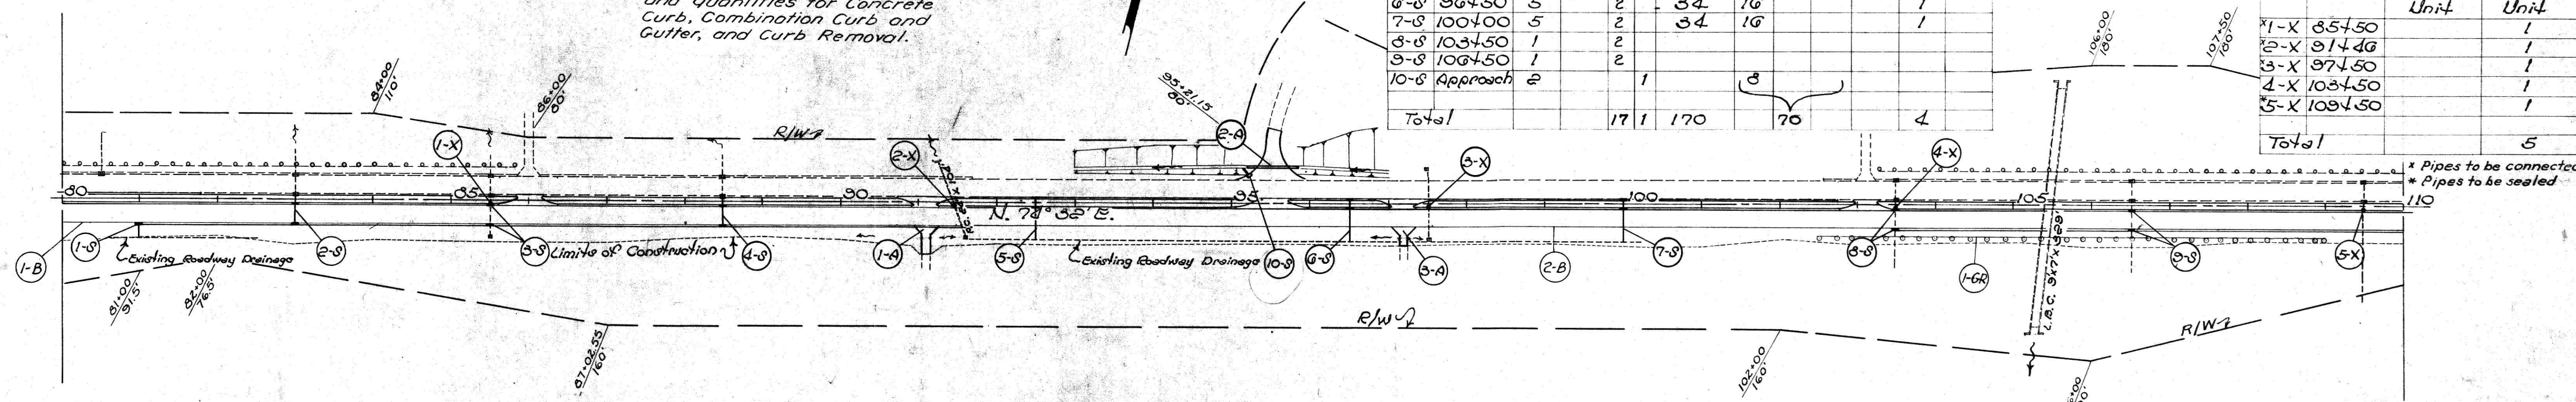


STABILIZED BERM (B)		
Ref. No.	Station	I-17 Aggregate Cu. Yds.
1-B	80+00 to 80+96	7
2-B	91+68 to 103+46	87
Total		94

GUARD RAIL (GR)		
Ref. No.	Station	I-15.12 Flexible Plate Rail Lin. Ft.
1-GR	102+47 to 109+03	656
Total		656

MEDIAN AREA			
Station	From	To	
85+62	86+38	74.5	12.4
90+73.7	91+49.7	74.5	12.4
95+04	95+96	88.7	14.8
96+80	97+56	74.5	12.4
102+72	103+47.5	74.5	12.4
Total		386.7	64.4

DRIVES & APPROACHES									
Ref. No.	Station	Width	T-70 8" R.C.C. Pavt. Sq. Yds.	8" - 5" Classified Emb. Cu. Yds.	I-17 Aggregate Cu. Yds.	I-12 Type 2-A Conc. Curb Lin. Ft.	E-8 Rem. & Disposal 8" T-70 Pavt. Sq. Yds.	I-2 12" under Pavt. Lin. Ft.	E-12 Rem. & Disposal Ex. Pipe Lin. Ft.
1-A	91+11.72	Rt.			5.6				
2-A	96+50	Lt.	236.4	43		101	42.3	64	32
3-A	97+18	Rt.			2.8				
Total			236.4	43	8.4	101	42.3	64	32

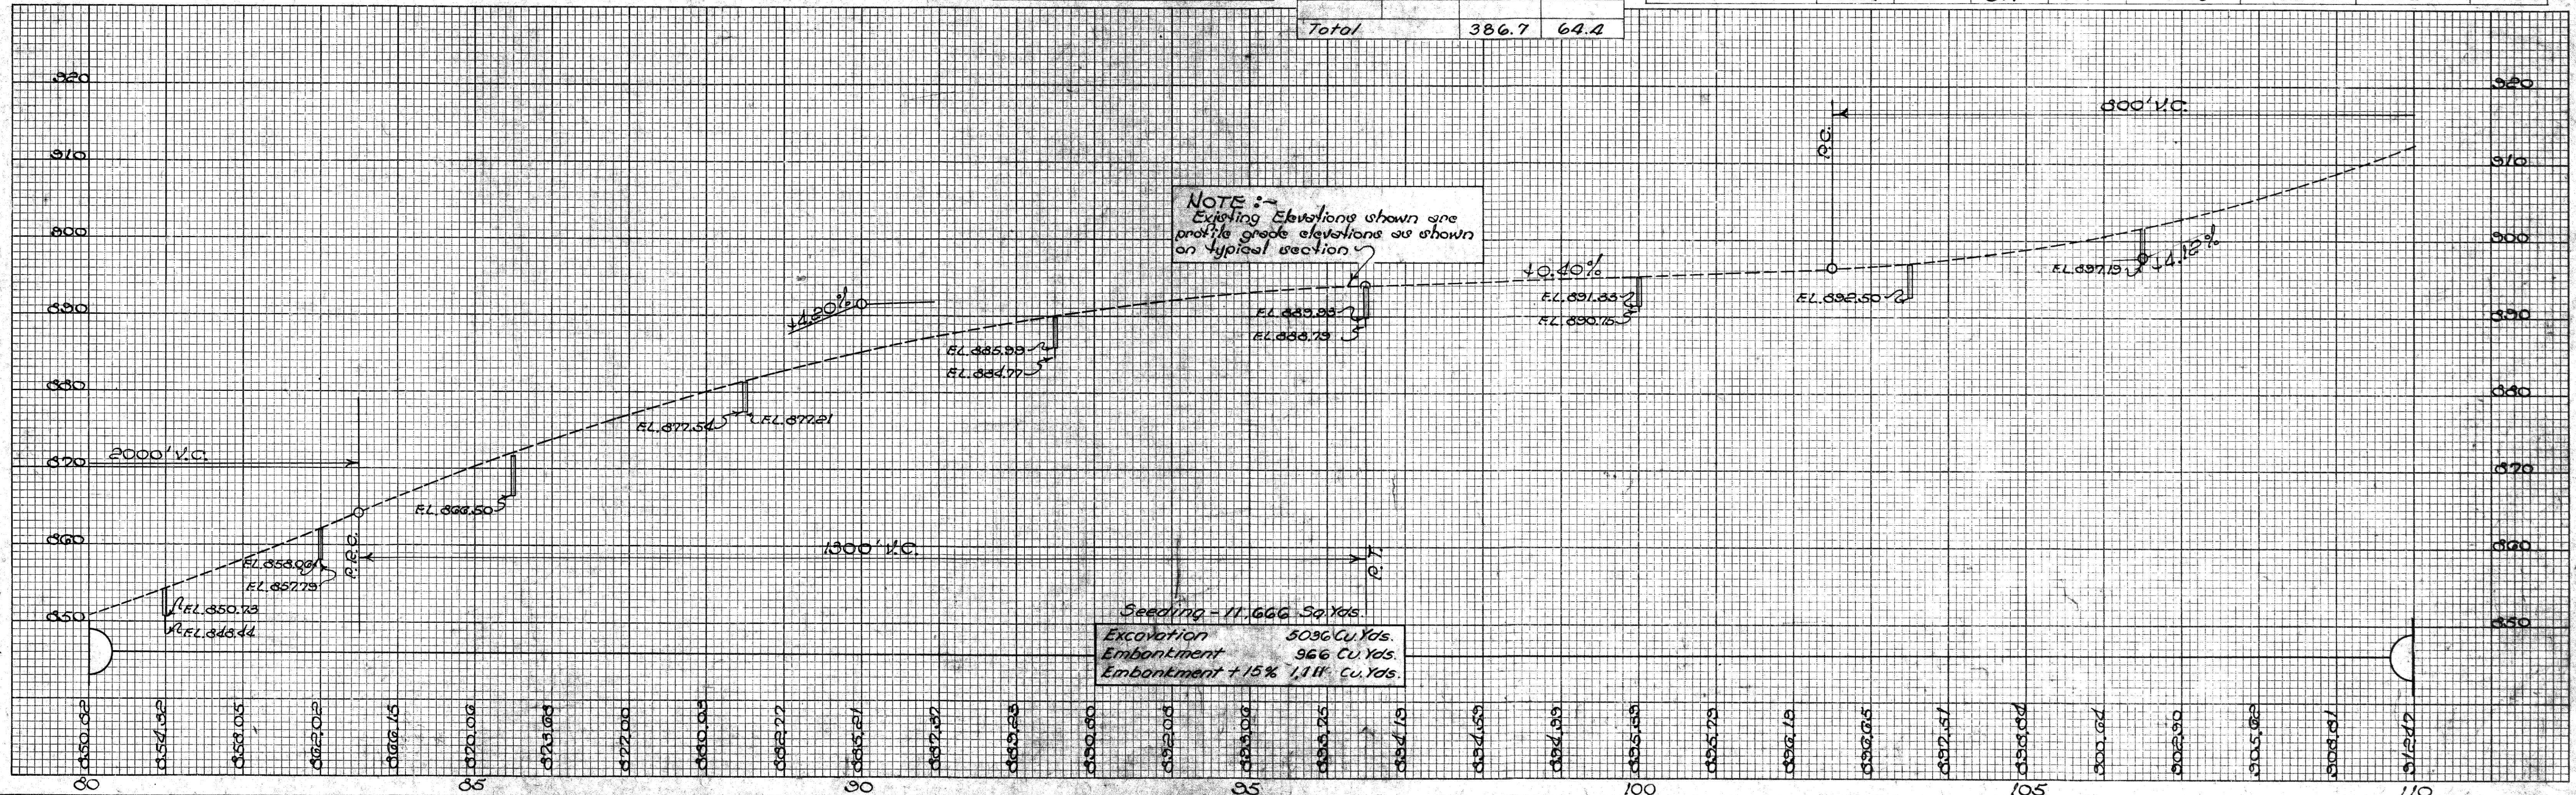

NOTE: Existing Elevations shown are profile grade elevations as shown on typical section.

Seeding - 11,666 Sq. Yds.
Excavation 5096 Cu. Yds.
Embankment 966 Cu. Yds.
Embankment + 15% 1,111 Cu. Yds.

80+00 to 110+00