


EXISTING STRUCTURE
BRIDGE No GU-22-43
Type: ~ Conc. Slab with Conc. Abuts.
Span: ~ 25' Clear - Rd'wy. GS
Loading: ~ N-15-33
Wearing Surf: ~ 3" Brick

Note: See Sheet No 23 for location and quantities for Concrete Curb, Combination Curb and Gutter, and Curb Removal.

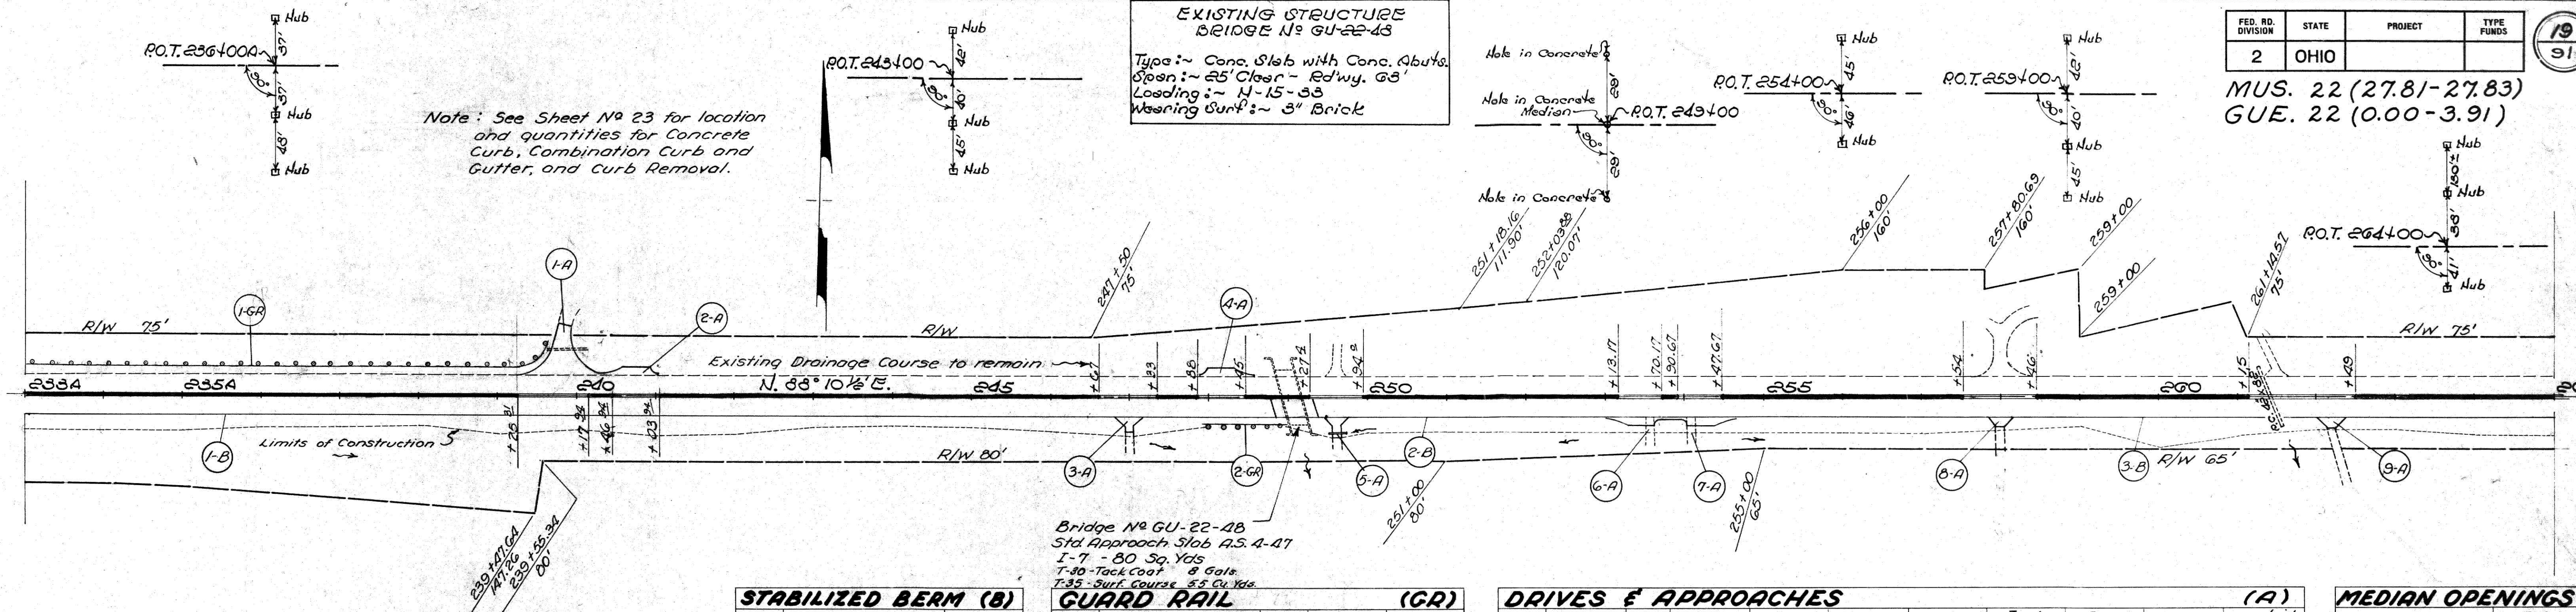


STABILIZED BERM (B)			
Ref. No	Station	I-17 Aggregate	
	From	To	Cu. Yds.
1-B	233+00A	248+98.16	118
2-B	249+25.76	252+98.67	28
3-B	254+62.17	265+00	77
Total			223

GUARD RAIL (GR)					
Ref. No	Station	Side	I-15.12 Flexible Plate Rail Lin. Ft.	I-15.13 Steel Beam Rail Lin. Ft.	
1-GR	233+00A	ACC RD 239+60	Lt	672	
2-GR	247+98	248+98	Rt	100	
Totals				672	100

DRIVES & APPROACHES (A)									
Ref No	Station	Side	T-70 9" P.C.C. Pav't Sq. Yds	SS-5 Classified Emb Cu. Yds	I-17 Aggregate Cu. Yds	E-8 Rem & Disp of Ex. Pav't 8"-T-70 Sq. Yds	I-1 12" Pipe for Drives Lin. Ft.	I-12 Conc Curb Type-2A Lin. Ft	E-12 Rem & Disp of Pipe 15" Under Lin. Ft
1-A	239+66.41	Lt	228.3	41.0	20.0			129.0	
2-A	240+81.94	Lt	59.1	10.7				43.0	
3-A	247+00	Rt			2.7				
4-A	248+10	Lt	59.1	10.7				43.0	
5-A	249+61	Rt			3.0		28		24
6-A	253+48.77	Rt	59.1	10.7		42.2		43.0	
7-A	254+12.67	Rt	59.1	10.7		42.2		43.0	
8-A	258+00	Rt			1.2				
9-A	262+16	Rt			1.2				
Total			464.7	83.8	28.1	84.4	28	301.0	24

MEDIAN OPENINGS			
Station	From	To	T-70 9" P.C.C. Pav't Sq. Yds
239+25.76	240+17.94		41.2
240+46.94	241+03.94		25.3
246+67	247+33		29.3
247+88	248+45		25.3
249+27.6	249+94		29.6
253+13.77	253+70.77		25.3
253+90.67	254+47.67		25.3
257+54	258+46		40.9
261+15	262+43		59.5
Total			301.7

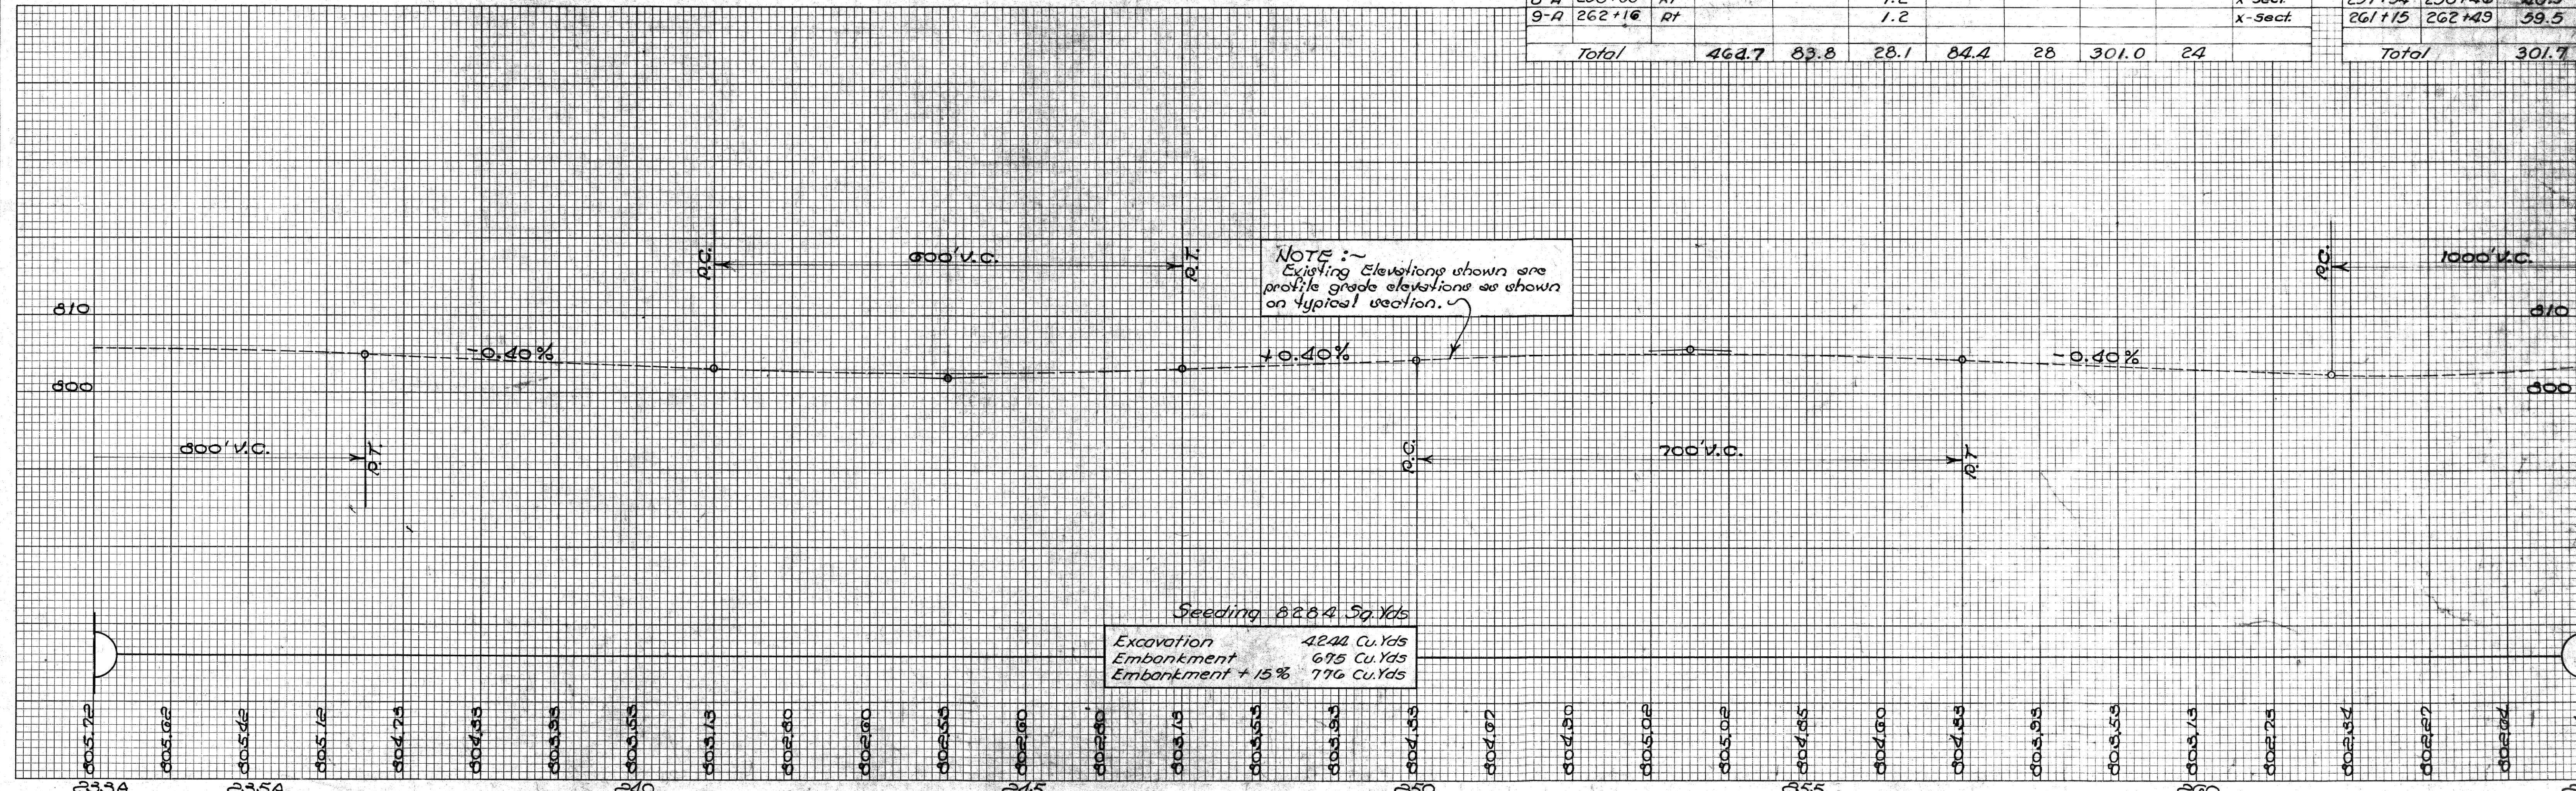

Seeding 8284 Sq. Yds
Excavation 4244 Cu. Yds
Embankment 675 Cu. Yds
Embankment + 15% 776 Cu. Yds