

**NOT RECORDED**  
*Jack D. Newcome*  
 Jack D. Newcome  
 Date 4-8-19

**Jack D. Newcome**

Date \_\_\_\_\_

Reg. Surveyor No. 7321

## REFERENCES


All deed and official records shown on this plat.

Twelve Feet Wide  
Ingress, Egress,  
Easement

Castor Road

## LEGEND

- ▲ Railroad Spike Set
- Iron Pin Found
- ▣ Stone Found
- ◊ Axle Found
- Iron Pipe Found
- ▲ Railroad Spike Found
- Iron Pin Set, 5/8" rebar
- ☒ Monument Found
- Wooden Post

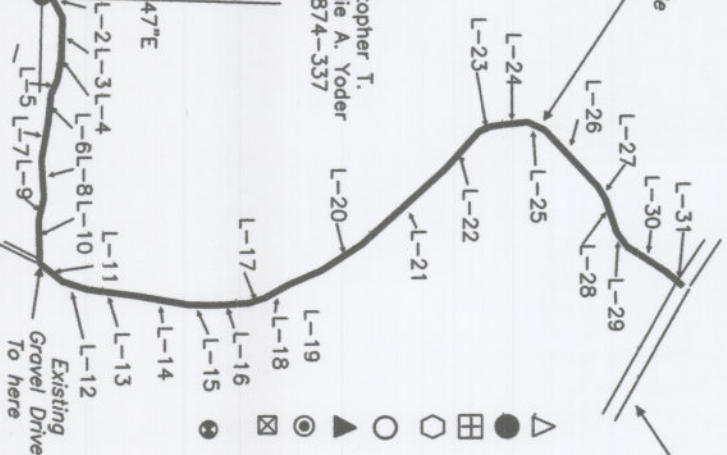

| COURSE | BEARING      | DISTANCE |
|--------|--------------|----------|
| L-1    | N 89°19'59"E | 205.11'  |
| L-2    | N 62°42'45"E | 106.47'  |
| L-3    | S 87°46'25"E | 111.10'  |
| L-4    | S 79°46'10"E | 62.67'   |
| L-5    | S 65°52'58"E | 44.23'   |
| L-6    | S 84°05'48"E | 76.62'   |
| L-7    | S 79°23'45"E | 109.22'  |
| L-8    | S 86°34'54"E | 107.42'  |
| L-9    | S 76°34'50"E | 64.68'   |
| L-10   | N 89°09'35"E | 118.24'  |
| L-11   | N 38°49'55"E | 84.67'   |
| L-12   | N 17°59'30"E | 71.87'   |
| L-13   | N 07°35'30"E | 148.36'  |
| L-14   | N 10°10'55"E | 139.67'  |
| L-15   | N 01°32'34"E | 70.20'   |
| L-16   | N 03°09'46"W | 99.51'   |
| L-17   | N 16°56'23"W | 48.26'   |
| L-18   | N 29°12'44"W | 77.88'   |
| L-19   | N 22°46'44"W | 98.92'   |
| L-20   | N 32°34'12"W | 140.21'  |
| L-21   | N 41°46'09"W | 314.76'  |
| L-22   | N 47°54'59"W | 137.80'  |
| L-23   | N 24°21'13"W | 39.31'   |
| L-24   | N 06°19'41"W | 104.15'  |
| L-25   | N 25°18'34"E | 50.60'   |
| L-26   | N 46°48'53"E | 216.45'  |
| L-27   | N 58°55'54"E | 43.72'   |
| L-28   | N 71°49'59"E | 96.64'   |
| L-29   | N 54°32'40"E | 51.34'   |
| L-30   | N 32°51'23"E | 131.20'  |
| L-31   | N 40°21'13"E | 61.57'   |

SITUATED IN:

State of Ohio, County of Muskingum, Township of Monroe, and being all of Military Lots 21, 25, 26, 27, and 28 in Quarter Township 3, and being part of the Southeast Quarter of Section 15, Township 3, Range 5, United States Military Lands.

# BASIS OF BEARINGS

Bearings are based on the Ohio State Plane Coordinate System, NAD 83, South Zone, Grid North, as per GPS observations.

## PARCEL NO.S

All of: 42-40-15-02-000 +- 20.01 Ac.  
All of: 42-40-03-01-000 +- 53.49 Ac.  
All of: 42-40-03-02-000 +- 53.49 Ac.  
All of: 42-40-03-06-000 +- 102.08 Ac.  
All of: 42-40-03-07-000 +- 100.36 Ac.  
(+- 0.20 Ac. in R\W of McCort Road)  
All of: 42-40-03-14-000 +- 96.09 Ac.  
(+- 3.91 Ac. in R\W of St. Rte. 93)  
(+- 1.10 Ac. in R\W of McCort Rd.)  
All of: 42-50-03-28-000 +- 94.57 Ac.  
(+- 4.02 Ac. in R\W of St. Rte. 93)

Barbara Shields  
Cavine, Trustee  
OR 2589--270

Bethany King  
OR 1509-587

