


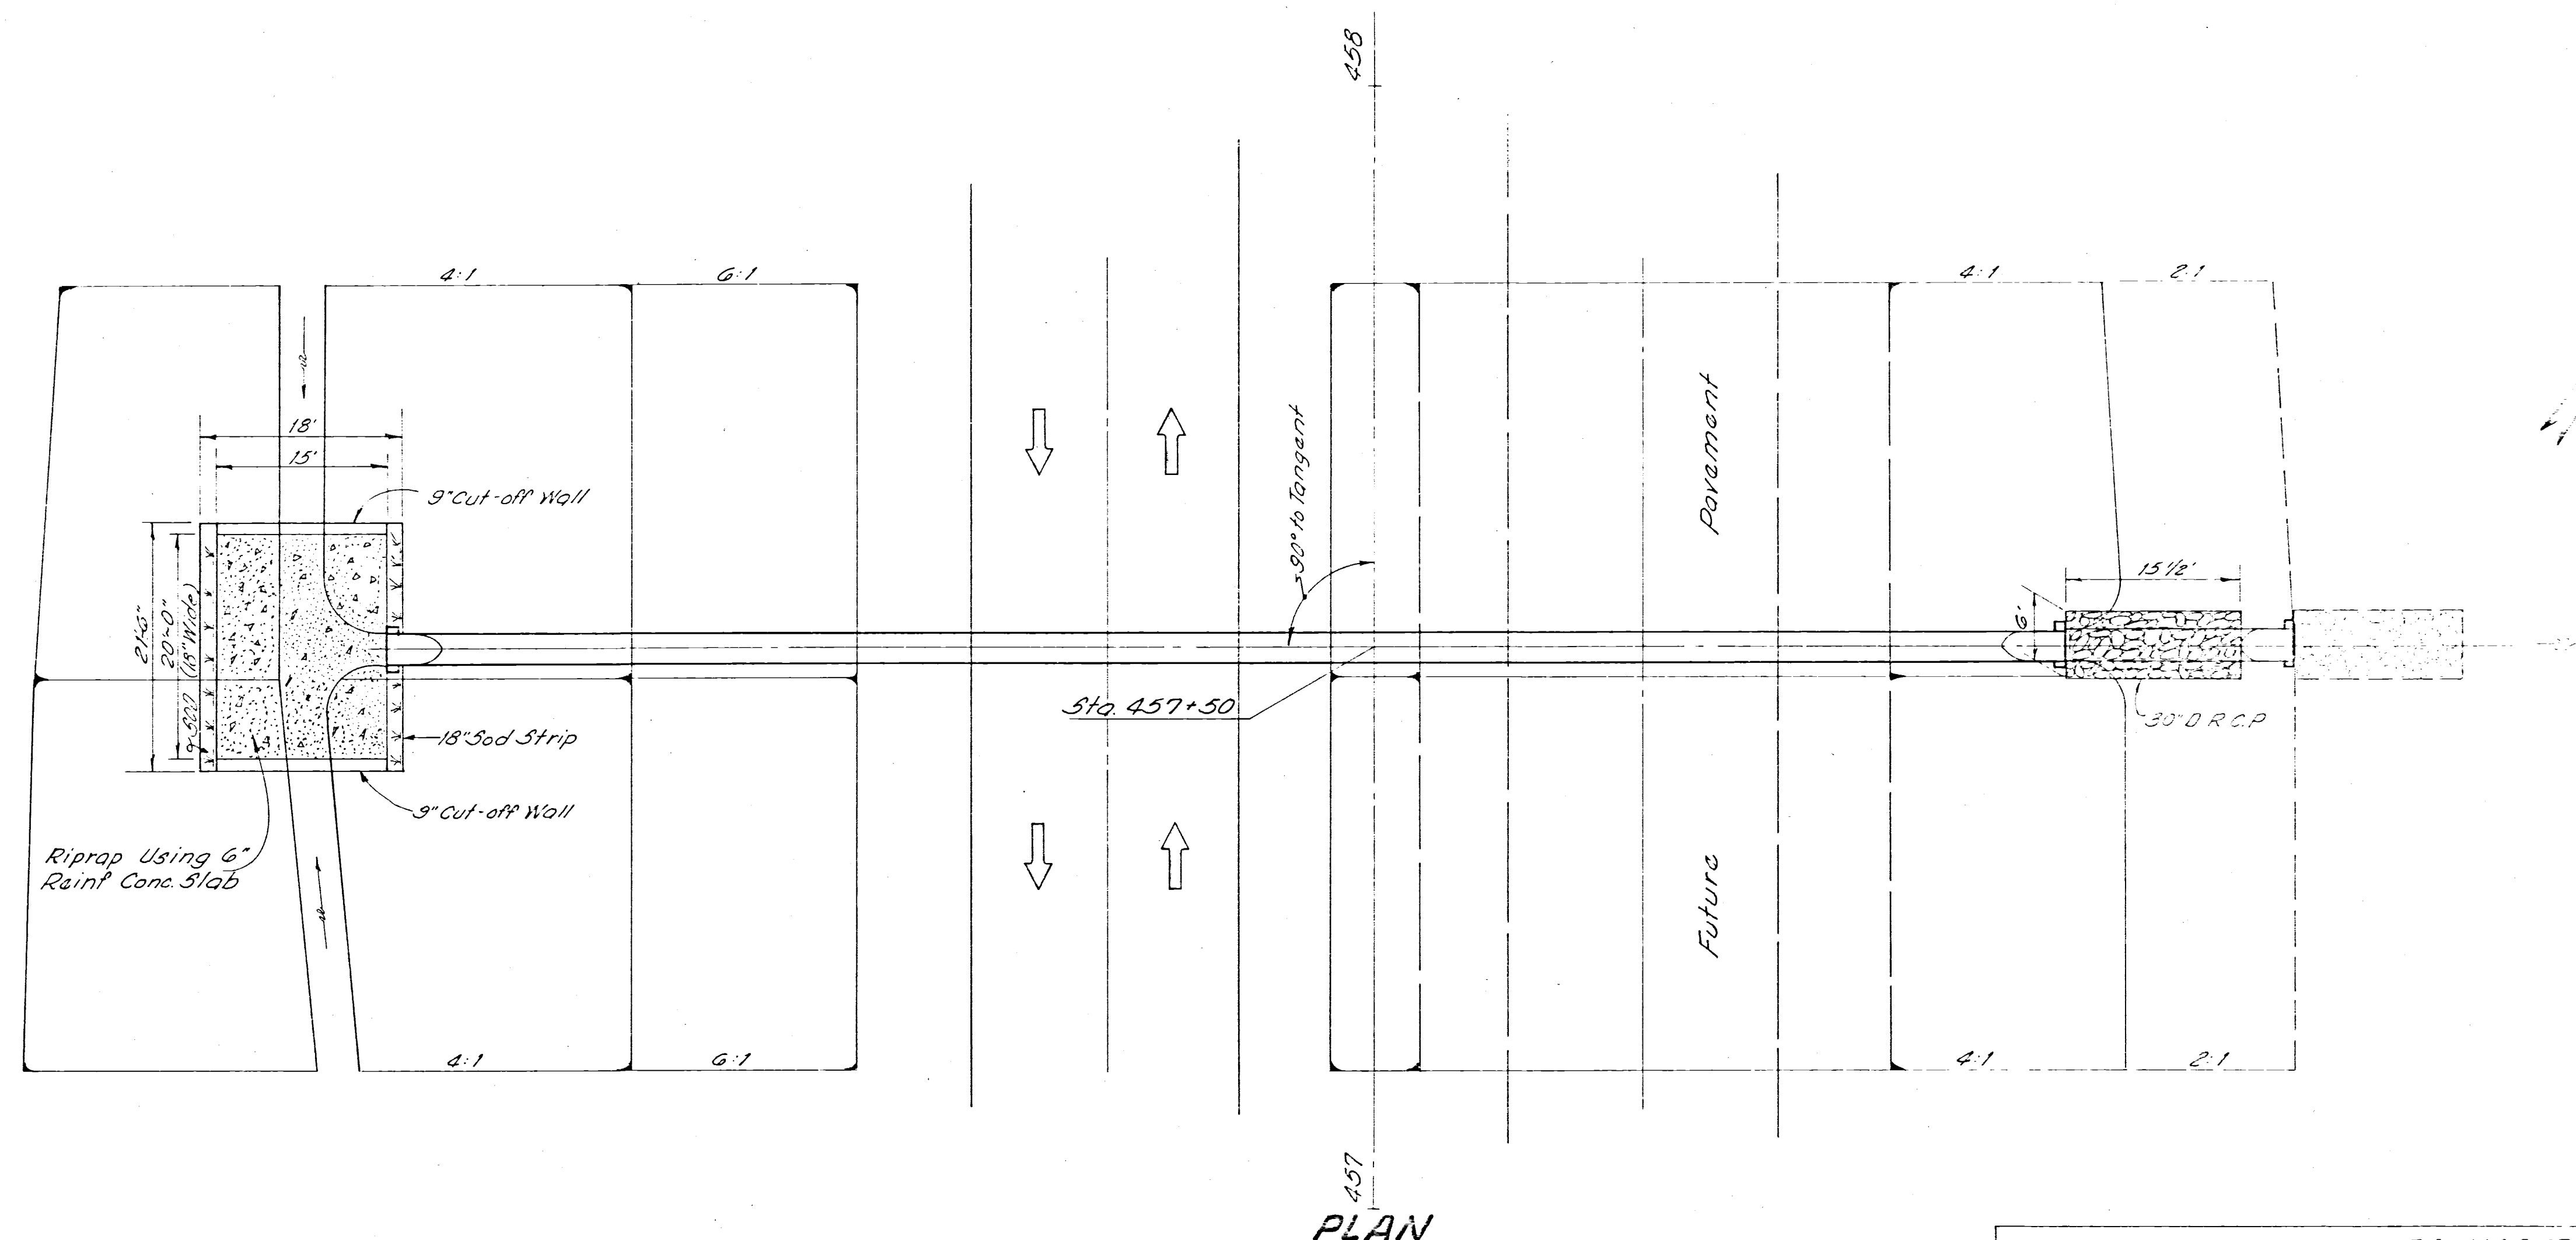

ESTIMATED QUANTITIES

ITEM 603	30" Conduit Type "A" (706 02 Class III or 706 03) with Cl. "B" Bedding	150 L.F.
ITEM 601	Dumped Rock Channel Protection	9 C.Y.
ITEM 601	Riprap, Using 6" Reinforced Concrete Slab as per Plan	33.5 Y.
ITEM 600	Sodding	7.5 Y.
ITEM 602	Masonry	3.5 C.Y.

Drainage Area = 21 Ac.
Q₂₅ = 44 c.f.s.

Note:
Reference made to Standard
Drawings MC-4 & HW-E

