

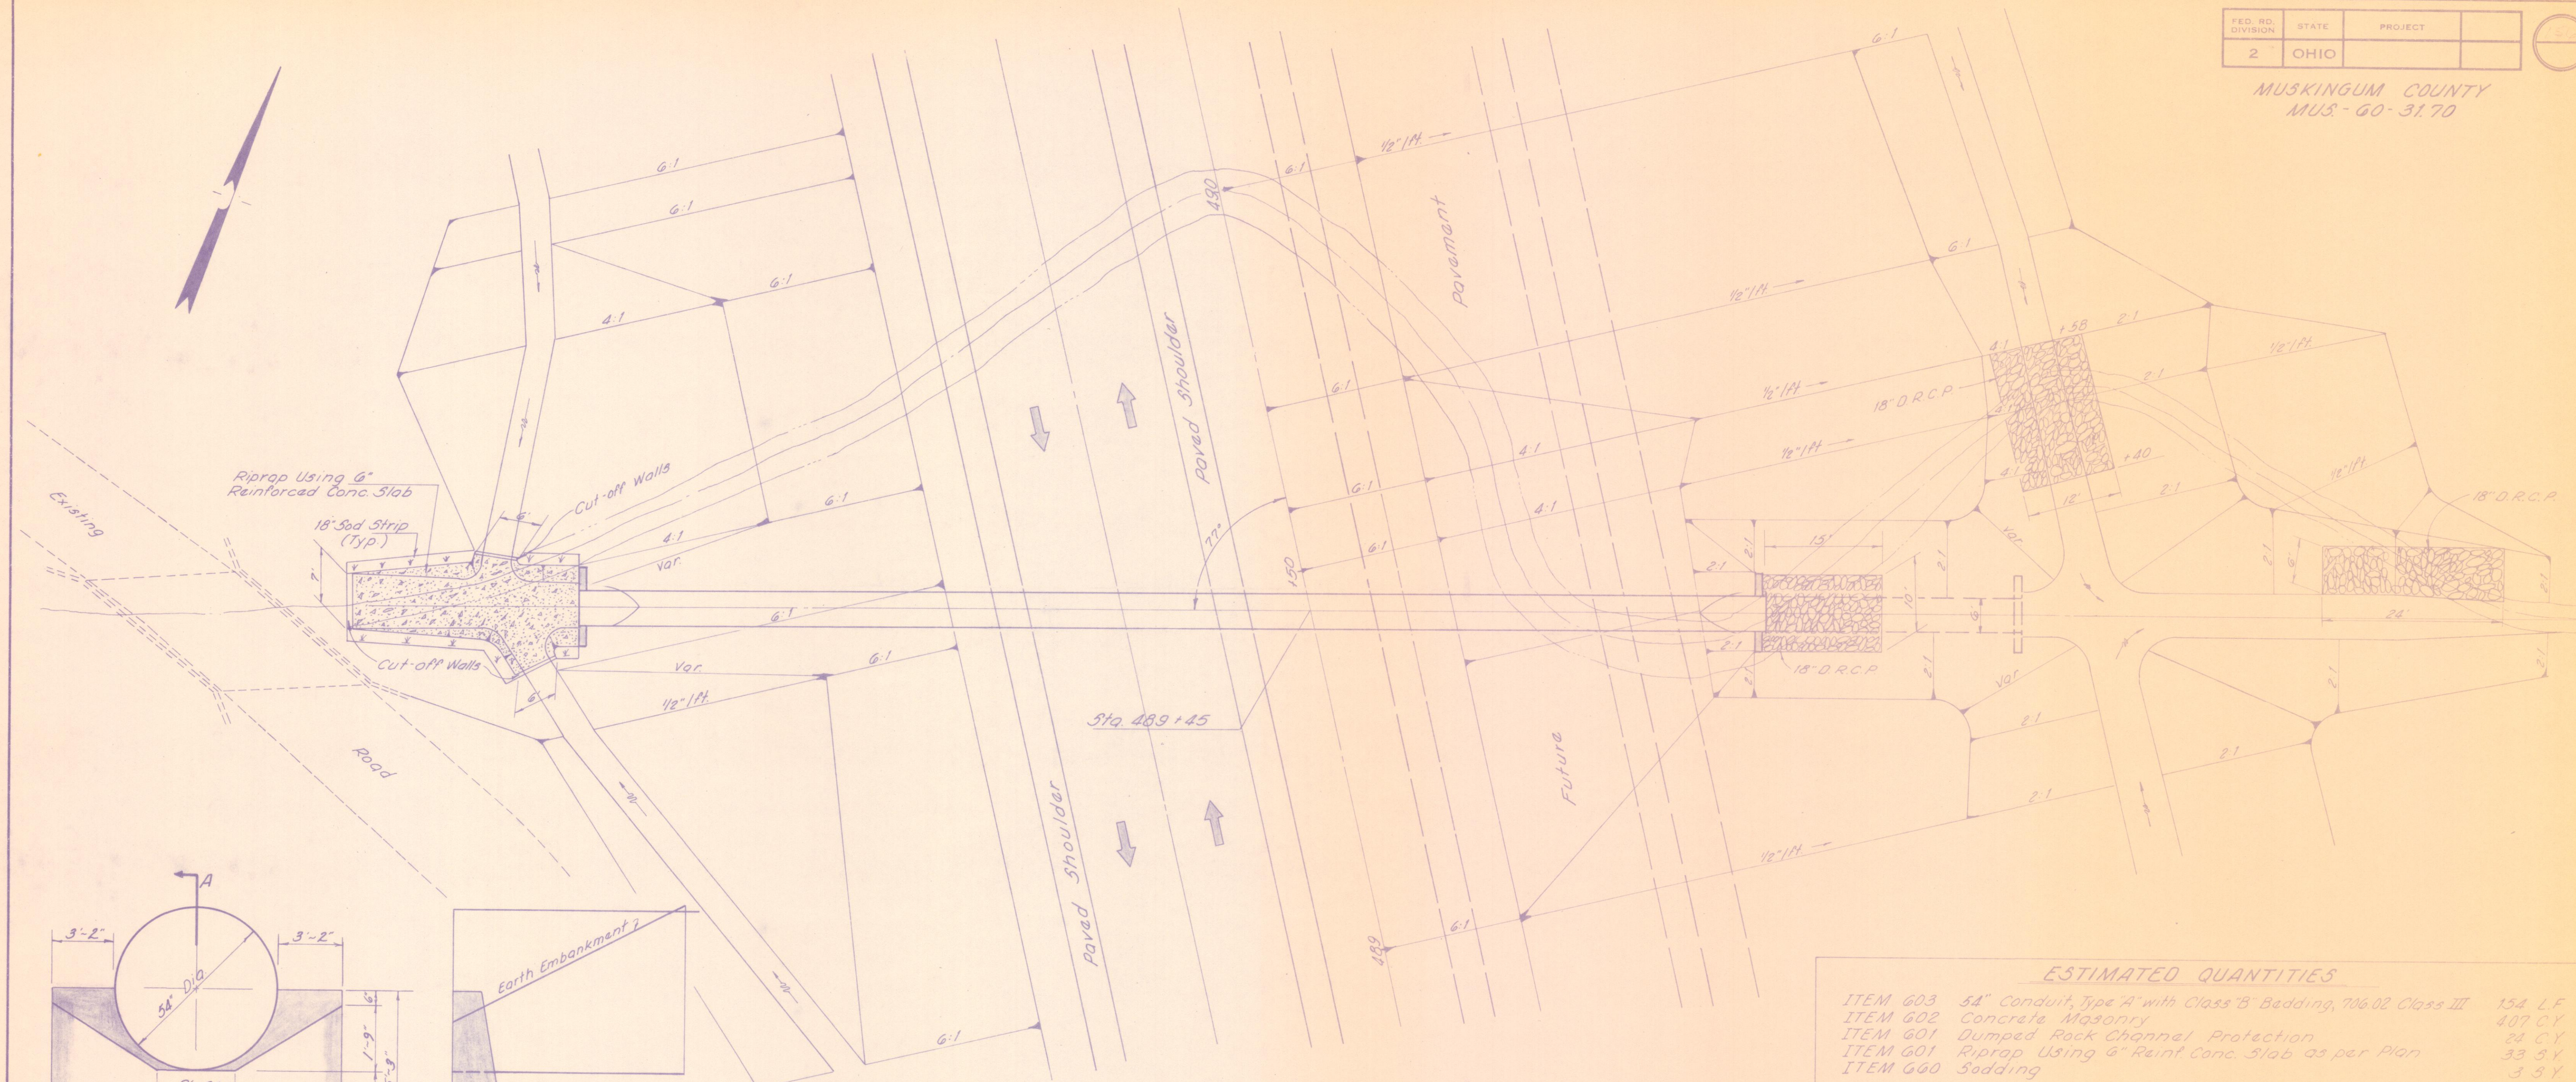


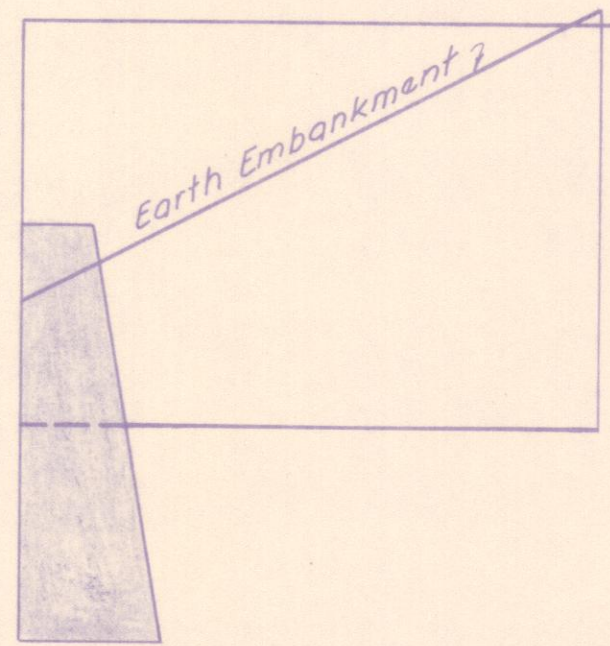

ESTIMATED QUANTITIES		
ITEM 603	54" Conduit, Type "A" with Class "B" Bedding, 706.02 Class III	154 LF
ITEM 602	Concrete Masonry	407 CY
ITEM 601	Dumped Rock Channel Protection	24 CY
ITEM 601	Riprap Using 6" Reinf. Conc. Slab as per Plan	33 CY
ITEM 660	Sodding	3 CY

Note:
Reference is made to Standard
Drawings SP-53 & MC-4

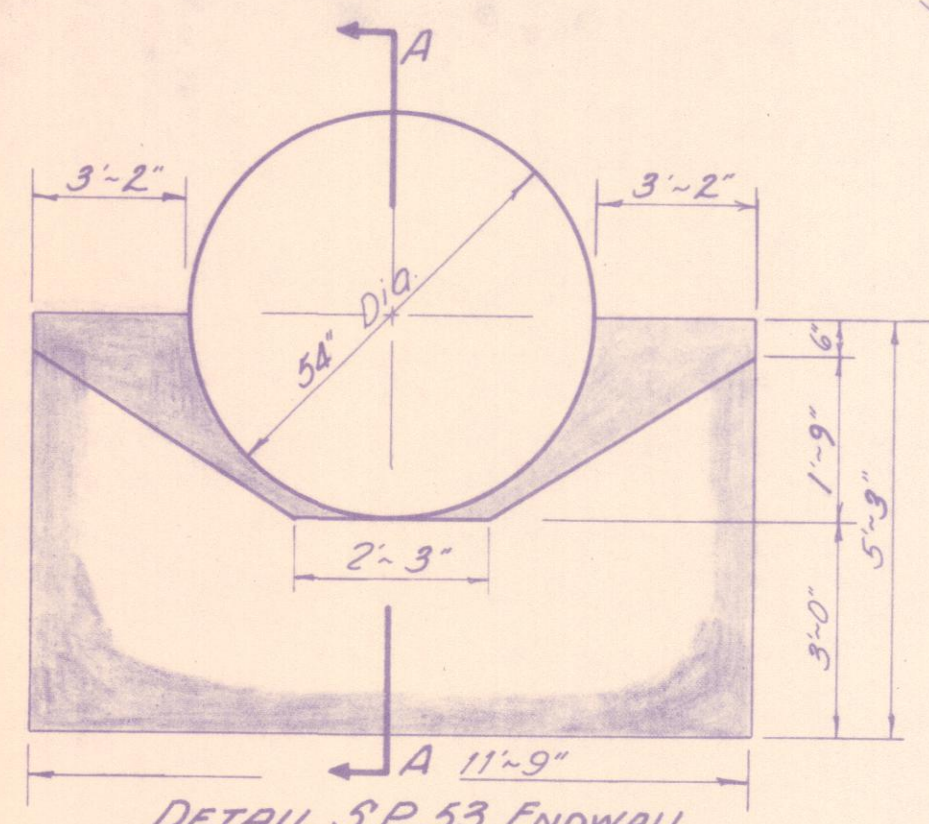

Drainage Area 248 Ac.
Q₂₅ = 228 cfs

