



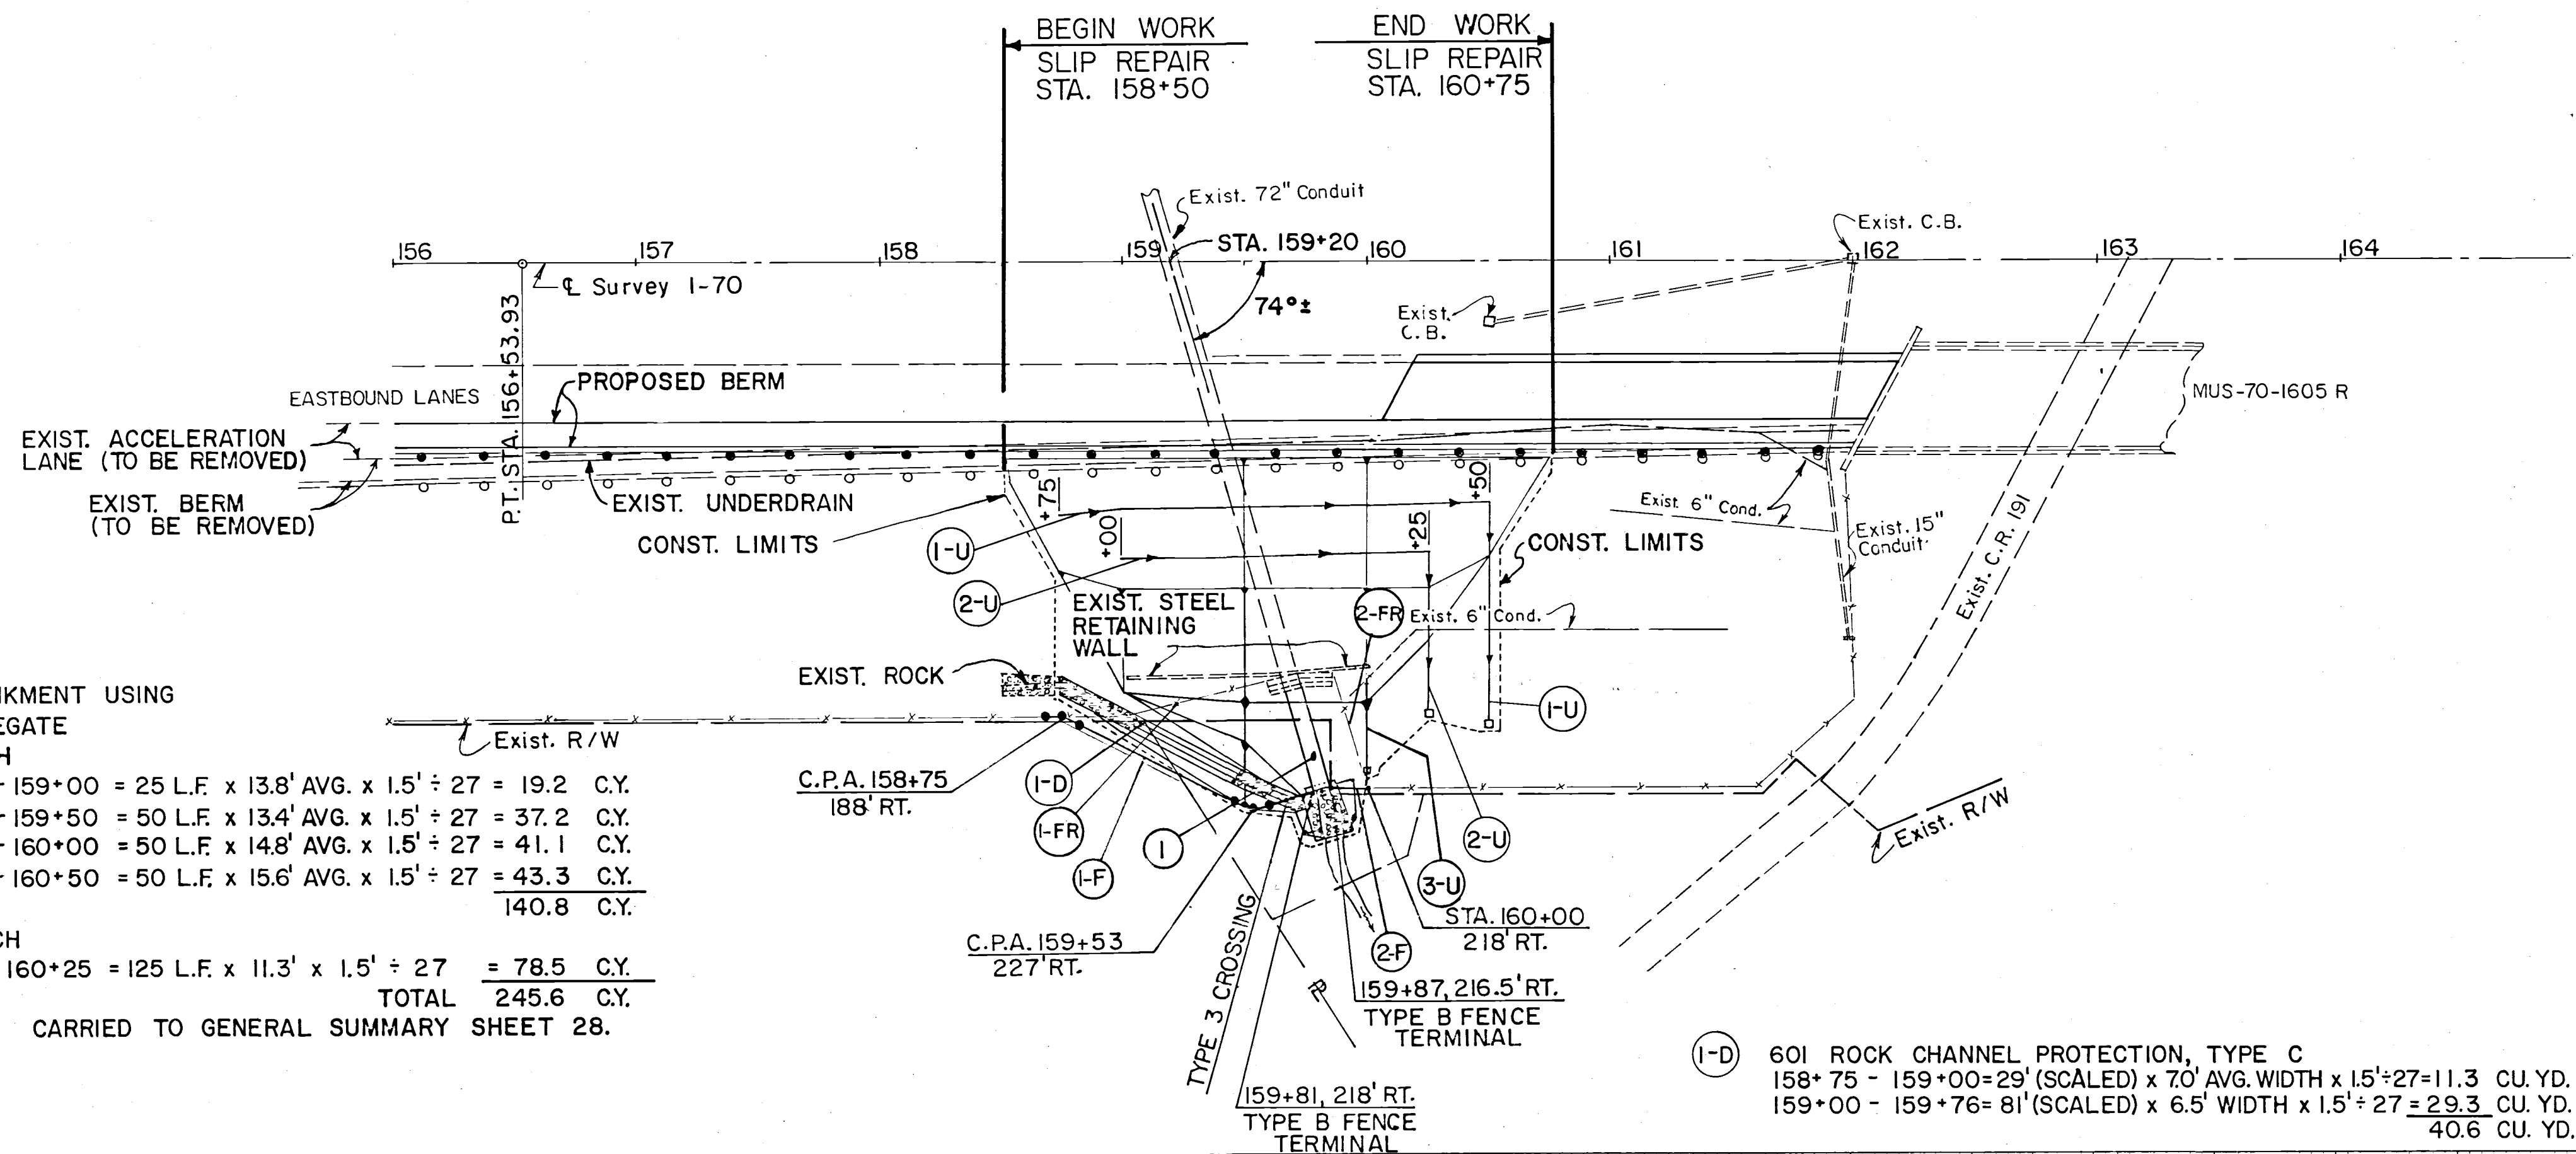

203 EMBANKMENT USING
Nº 8 AGGREGATE
UPPER BENCH
STA. 158+75 - 159+00 = 25 L.F. x 13.8' AVG. x 1.5' ÷ 27 = 19.2 C.Y.
STA. 159+00 - 159+50 = 50 L.F. x 13.4' AVG. x 1.5' ÷ 27 = 37.2 C.Y.
STA. 159+50 - 160+00 = 50 L.F. x 14.8' AVG. x 1.5' ÷ 27 = 41.1 C.Y.
STA. 160+00 - 160+50 = 50 L.F. x 15.6' AVG. x 1.5' ÷ 27 = 43.3 C.Y.
140.8 C.Y.
LOWER BENCH
STA. 159+00 - 160+25 = 125 L.F. x 11.3' x 1.5' ÷ 27 = 78.5 C.Y.
TOTAL 245.6 C.Y.
CARRIED TO GENERAL SUMMARY SHEET 28.

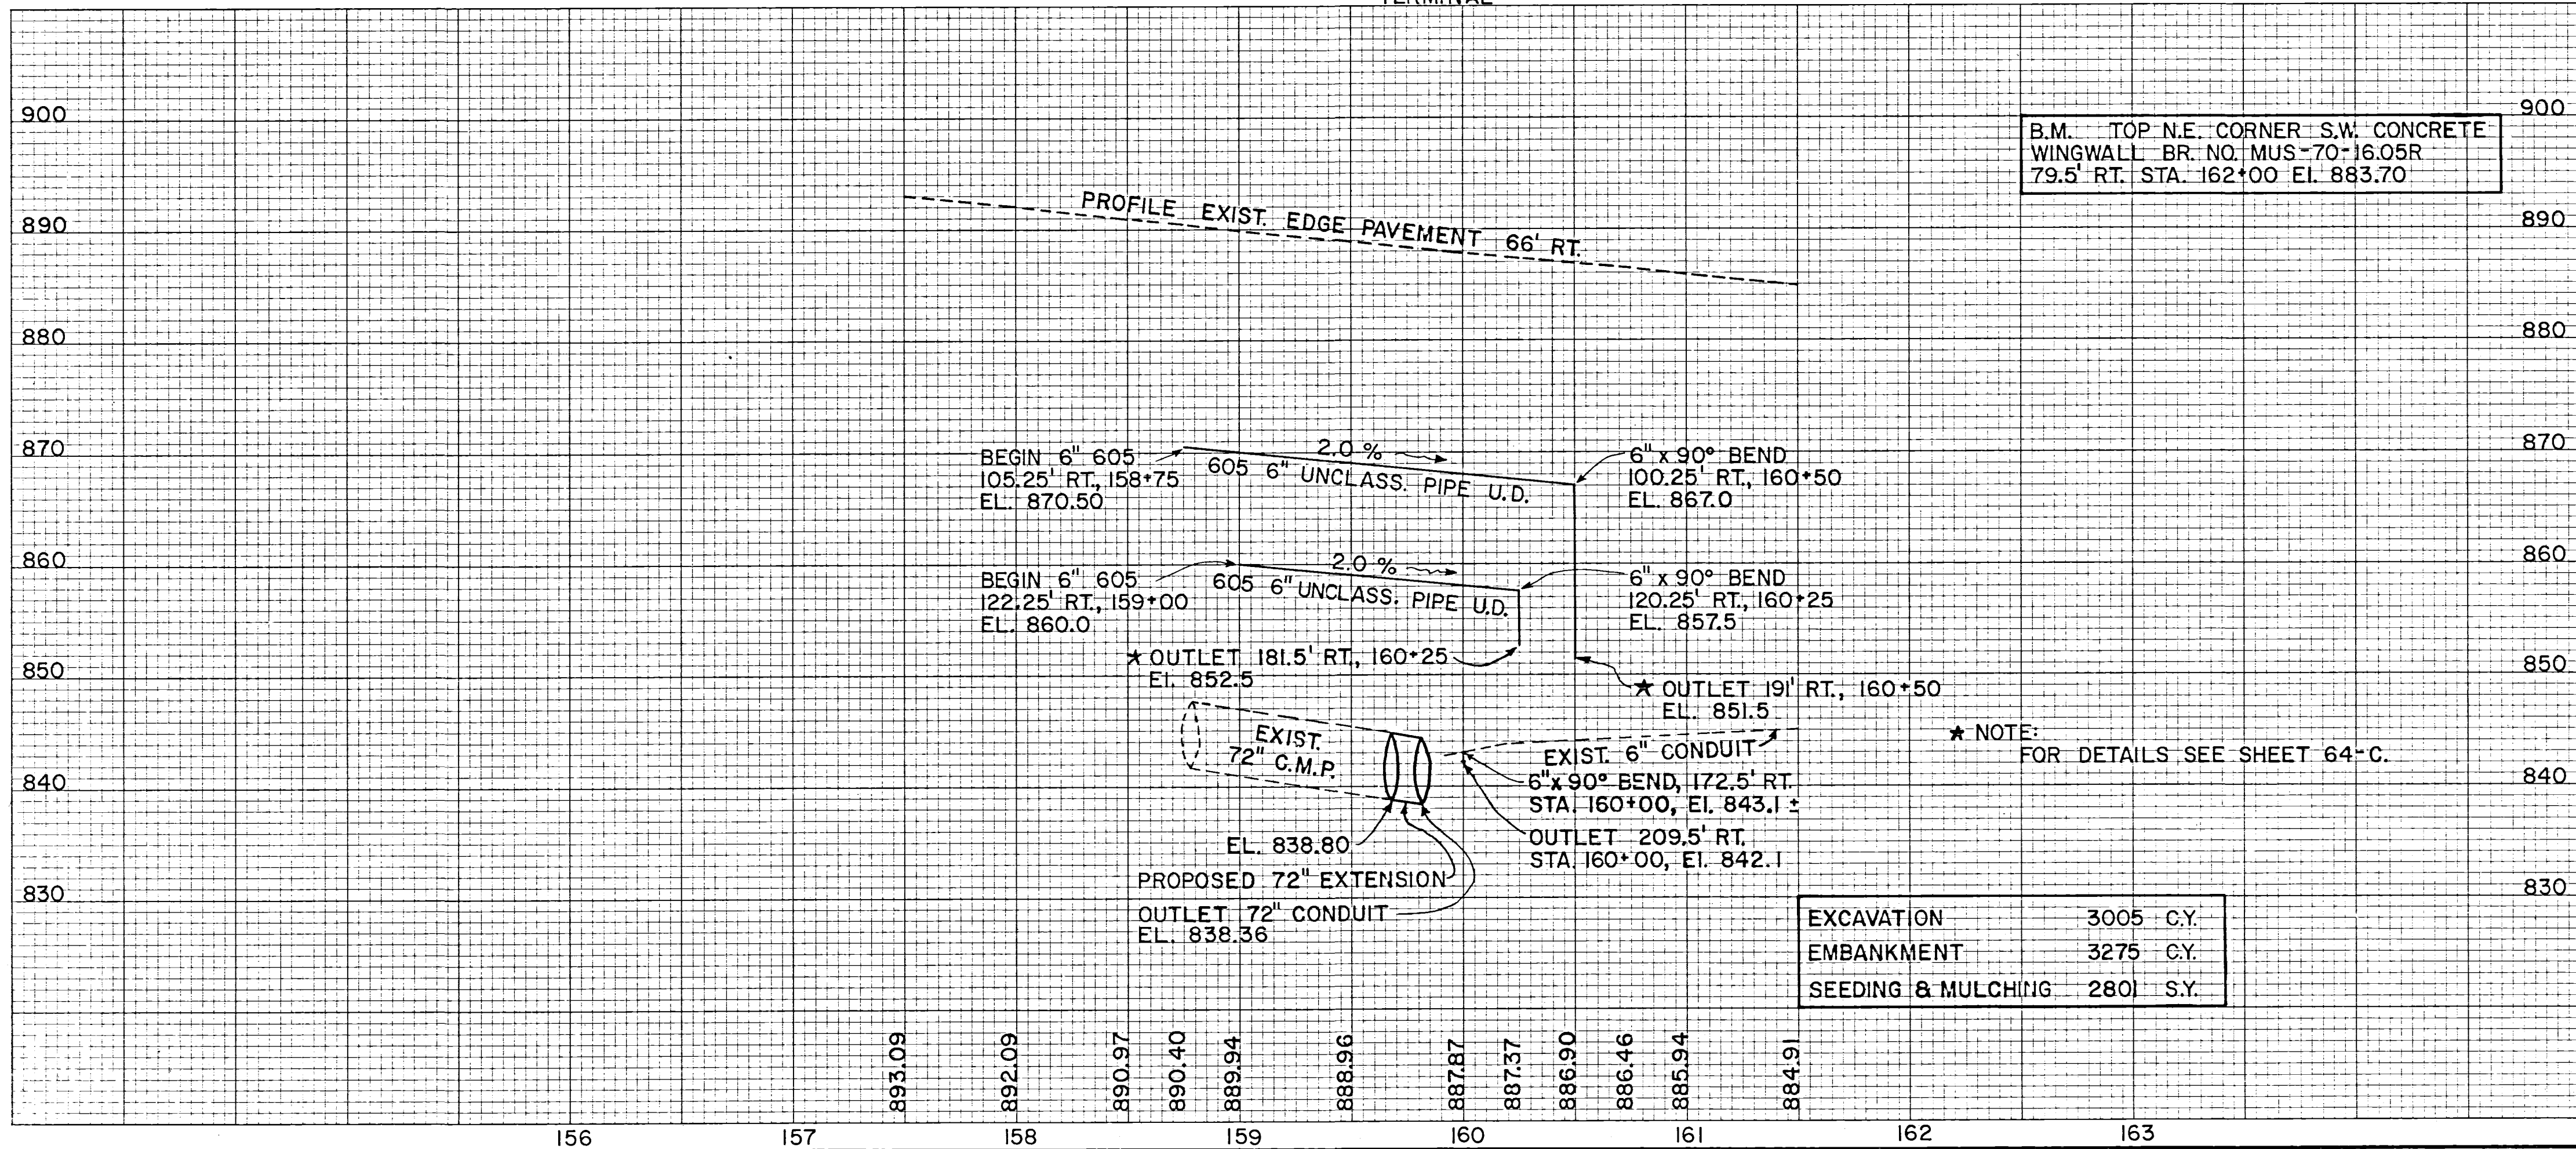

ESTIMATED QUANTITIES									
ITEM NO.	STATION TO STATION	SIDE	607 FENCE TYPE 47 LIN. FT.	202 FENCE REMOVED LIN. FT.	BENDS AND BRACKETS EACH	603 CONDUIT TYPE F LIN. FT.	603 CONDUIT TYPE D LIN. FT.	601 ROCK CHANNEL PROTECT TYPE C C.Y.	602 CONCRETE MASONRY HOLES EACH
I-D	158+75 - 159+76	RT.							
I-U	158+75 - 160+50	RT.							
2-U	159+00 - 160+25	RT.							
3-U	160+00	RT.							
I	159+68 - 159+88	RT.							
I-FR	158+75 - 159+52	RT.							
2-FR	159+88 - 160+00	RT.							
I-F	158+67 - 159+81	RT.							
2-F	159+87 - 160+00	RT.							
TOTALS			148	135		190	44	30	41