




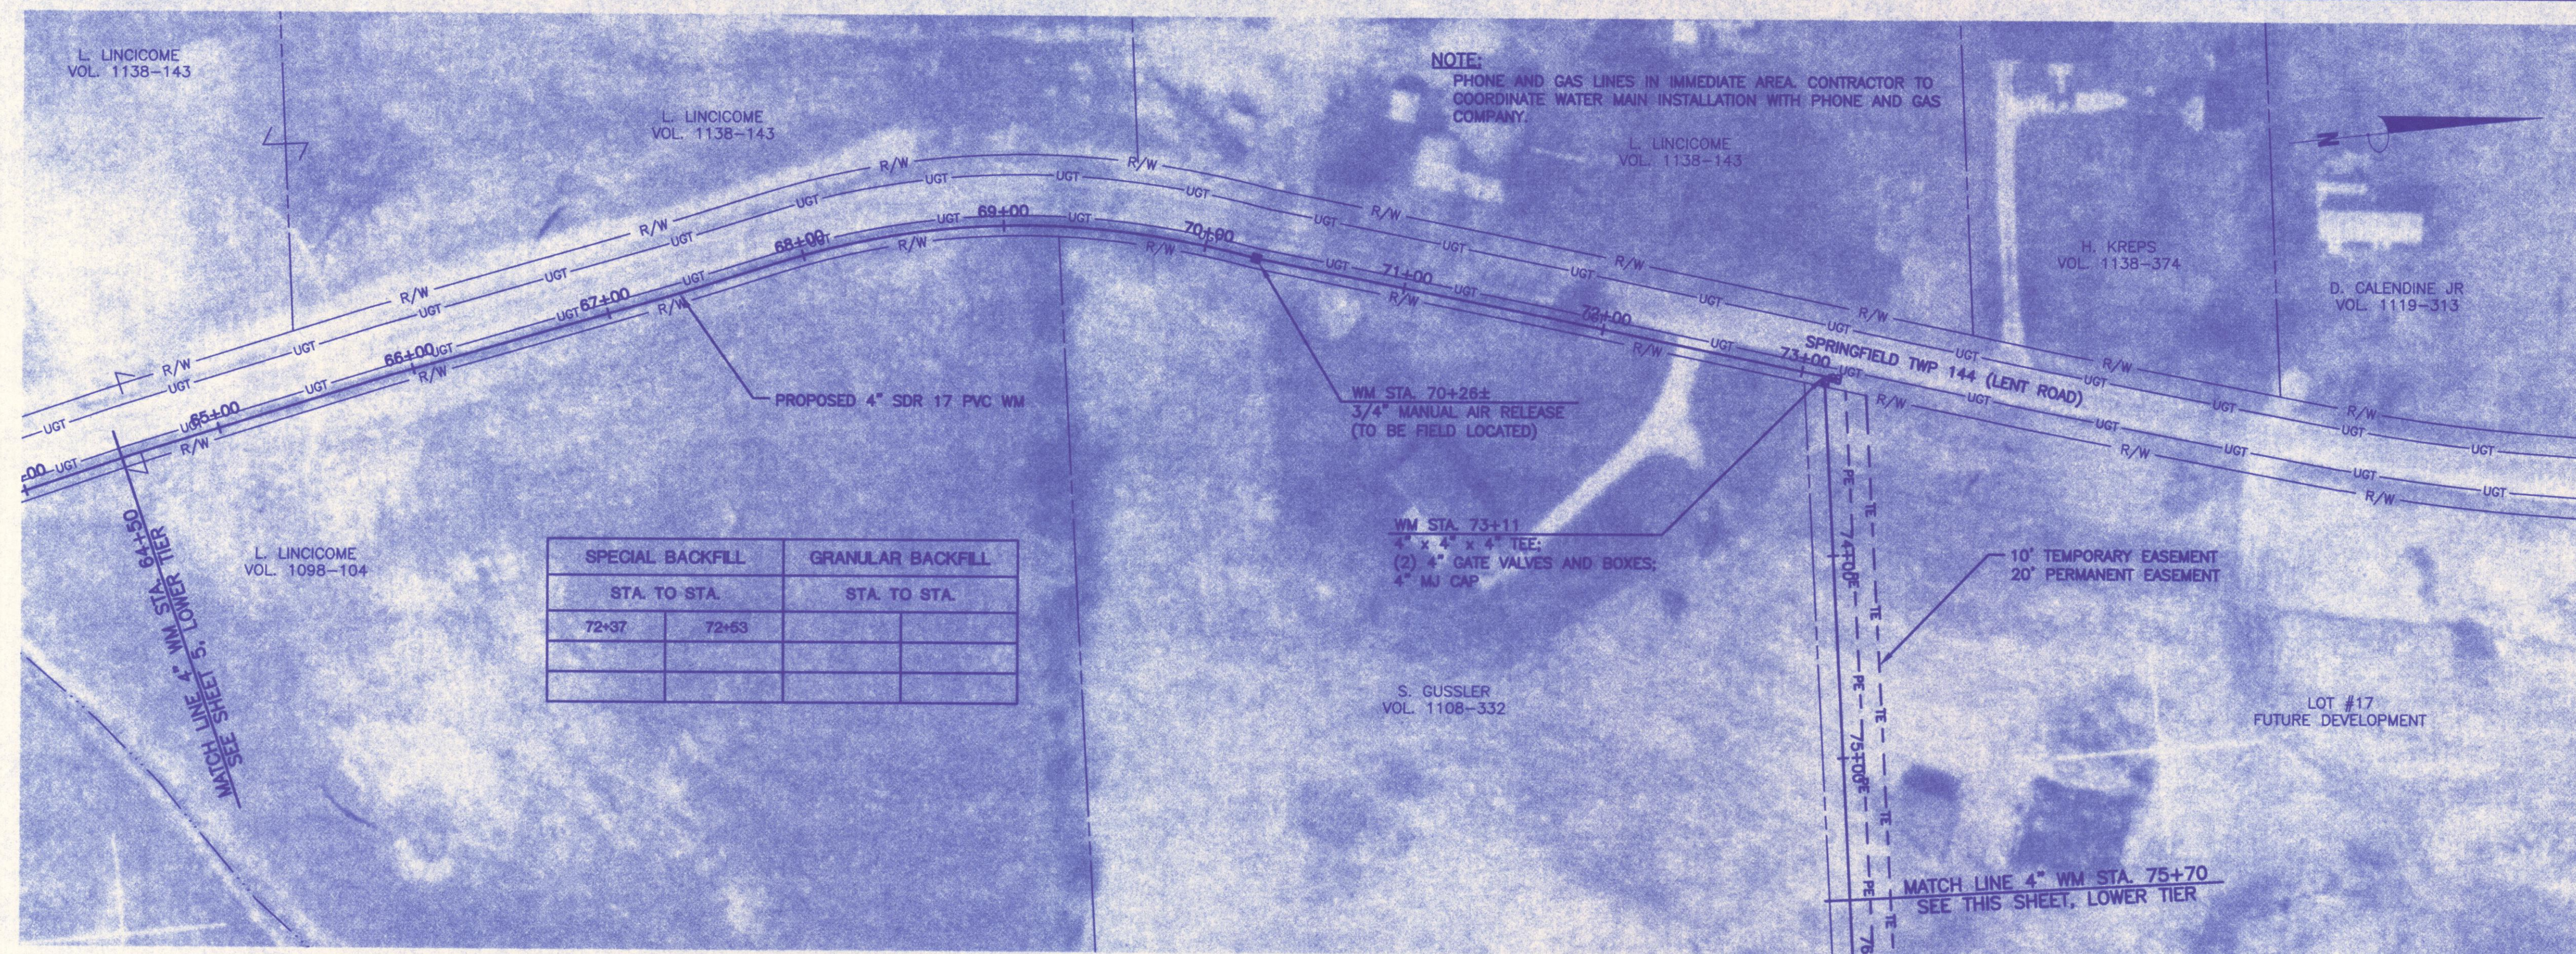

SPECIAL BACKFILL		GRANULAR BACKFILL	
STA. TO STA.		STA. TO STA.	
72+37	72+53		

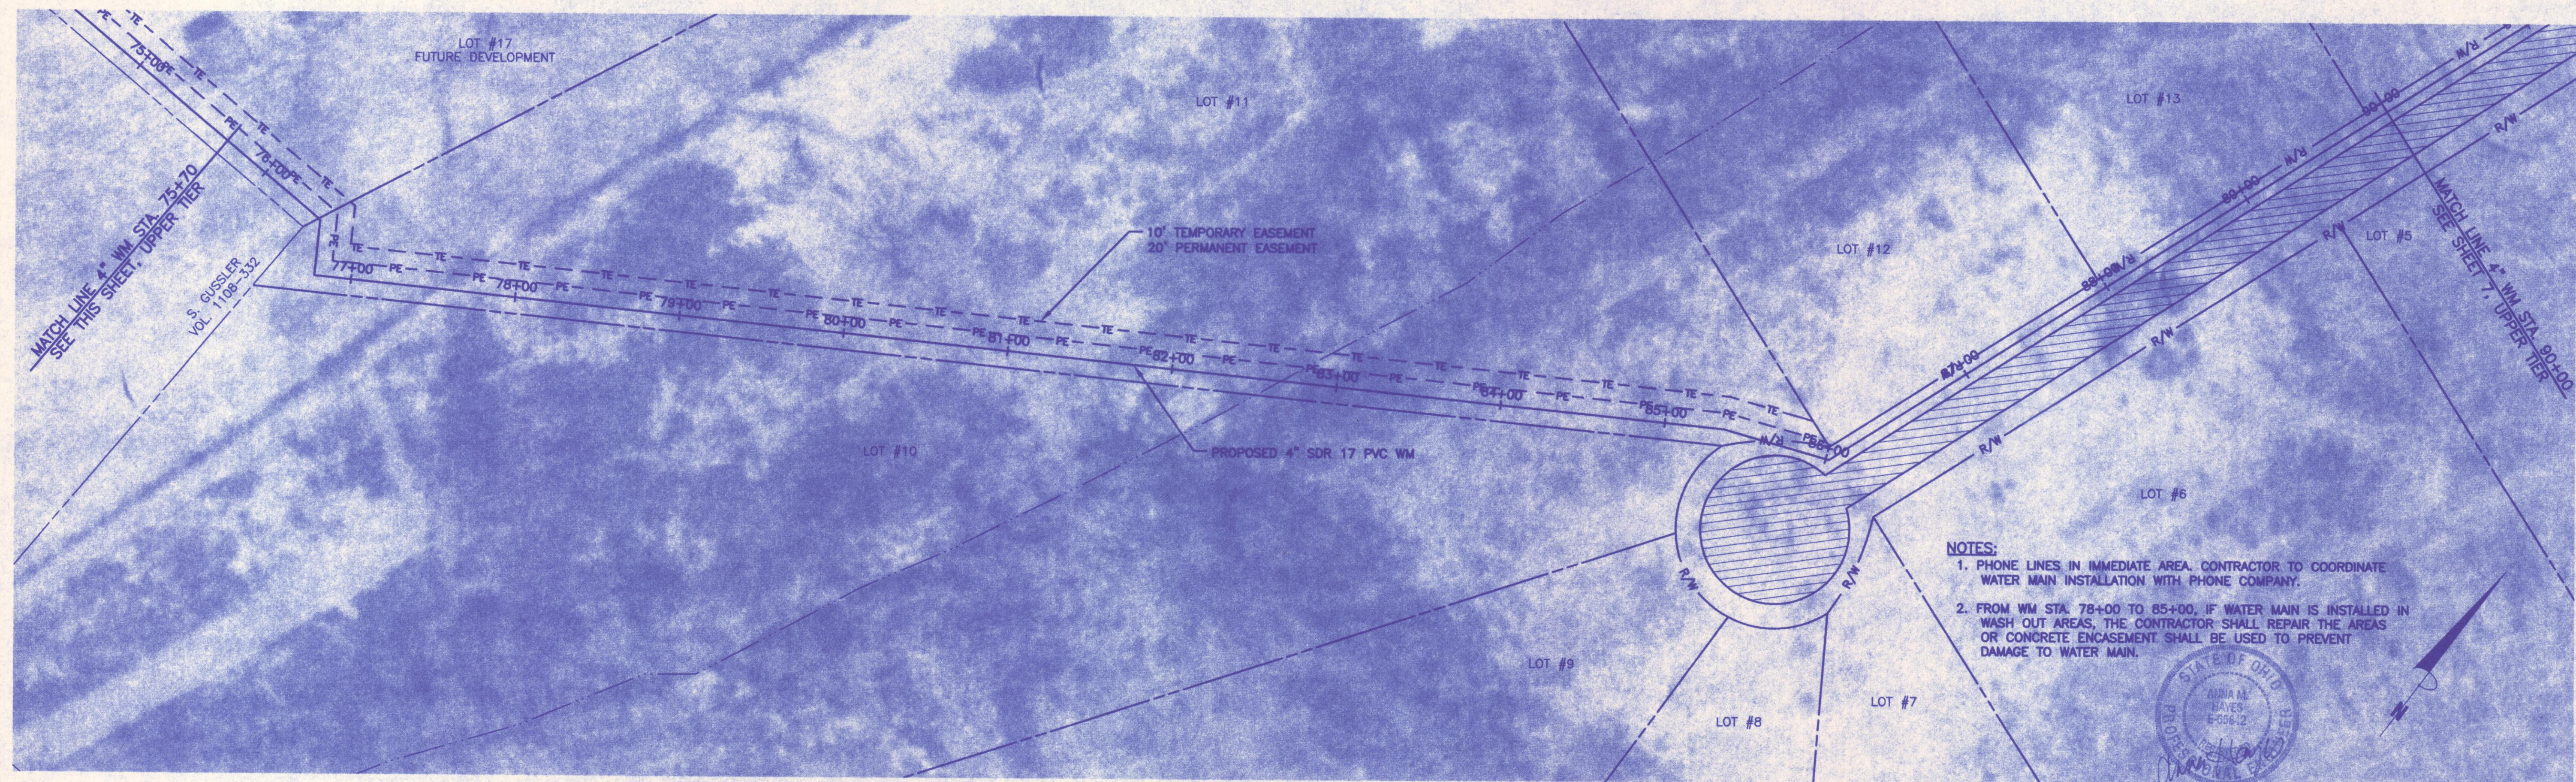

- NOTES:**
1. PHONE LINES IN IMMEDIATE AREA. CONTRACTOR TO COORDINATE WATER MAIN INSTALLATION WITH PHONE COMPANY.
 2. FROM WM STA. 78+00 TO 85+00, IF WATER MAIN IS INSTALLED IN WASH OUT AREAS, THE CONTRACTOR SHALL REPAIR THE AREAS OR CONCRETE ENCASUREMENT SHALL BE USED TO PREVENT DAMAGE TO WATER MAIN.

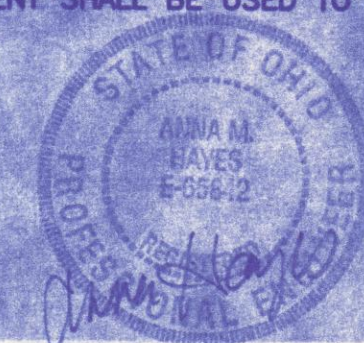

P:\PR2541\CADD\Layout\DWG 12-5-02 1:27:56 pm DYE

NO.	REVISIONS	DATE	BY	CHK.

Burgess & Niple, Limited Parkersburg, WV



BURGESS & NIPLE

**MAYSVILLE REGIONAL WATER DISTRICT
WATER DISTRIBUTION SYSTEM IMPROVEMENTS
LENT ROAD
CONTRACT 03-1**

JOB NO. 32541
DESIGNED BY: AMH
DRAWN BY: DRD
CHECKED BY: LES
APPROVED BY: LES
DATE: DEC 2002

4" WATER MAIN STA. 64+50 TO STA. 90+00

SCALE:
1"=50'
SHEET NO. 6 OF 8