


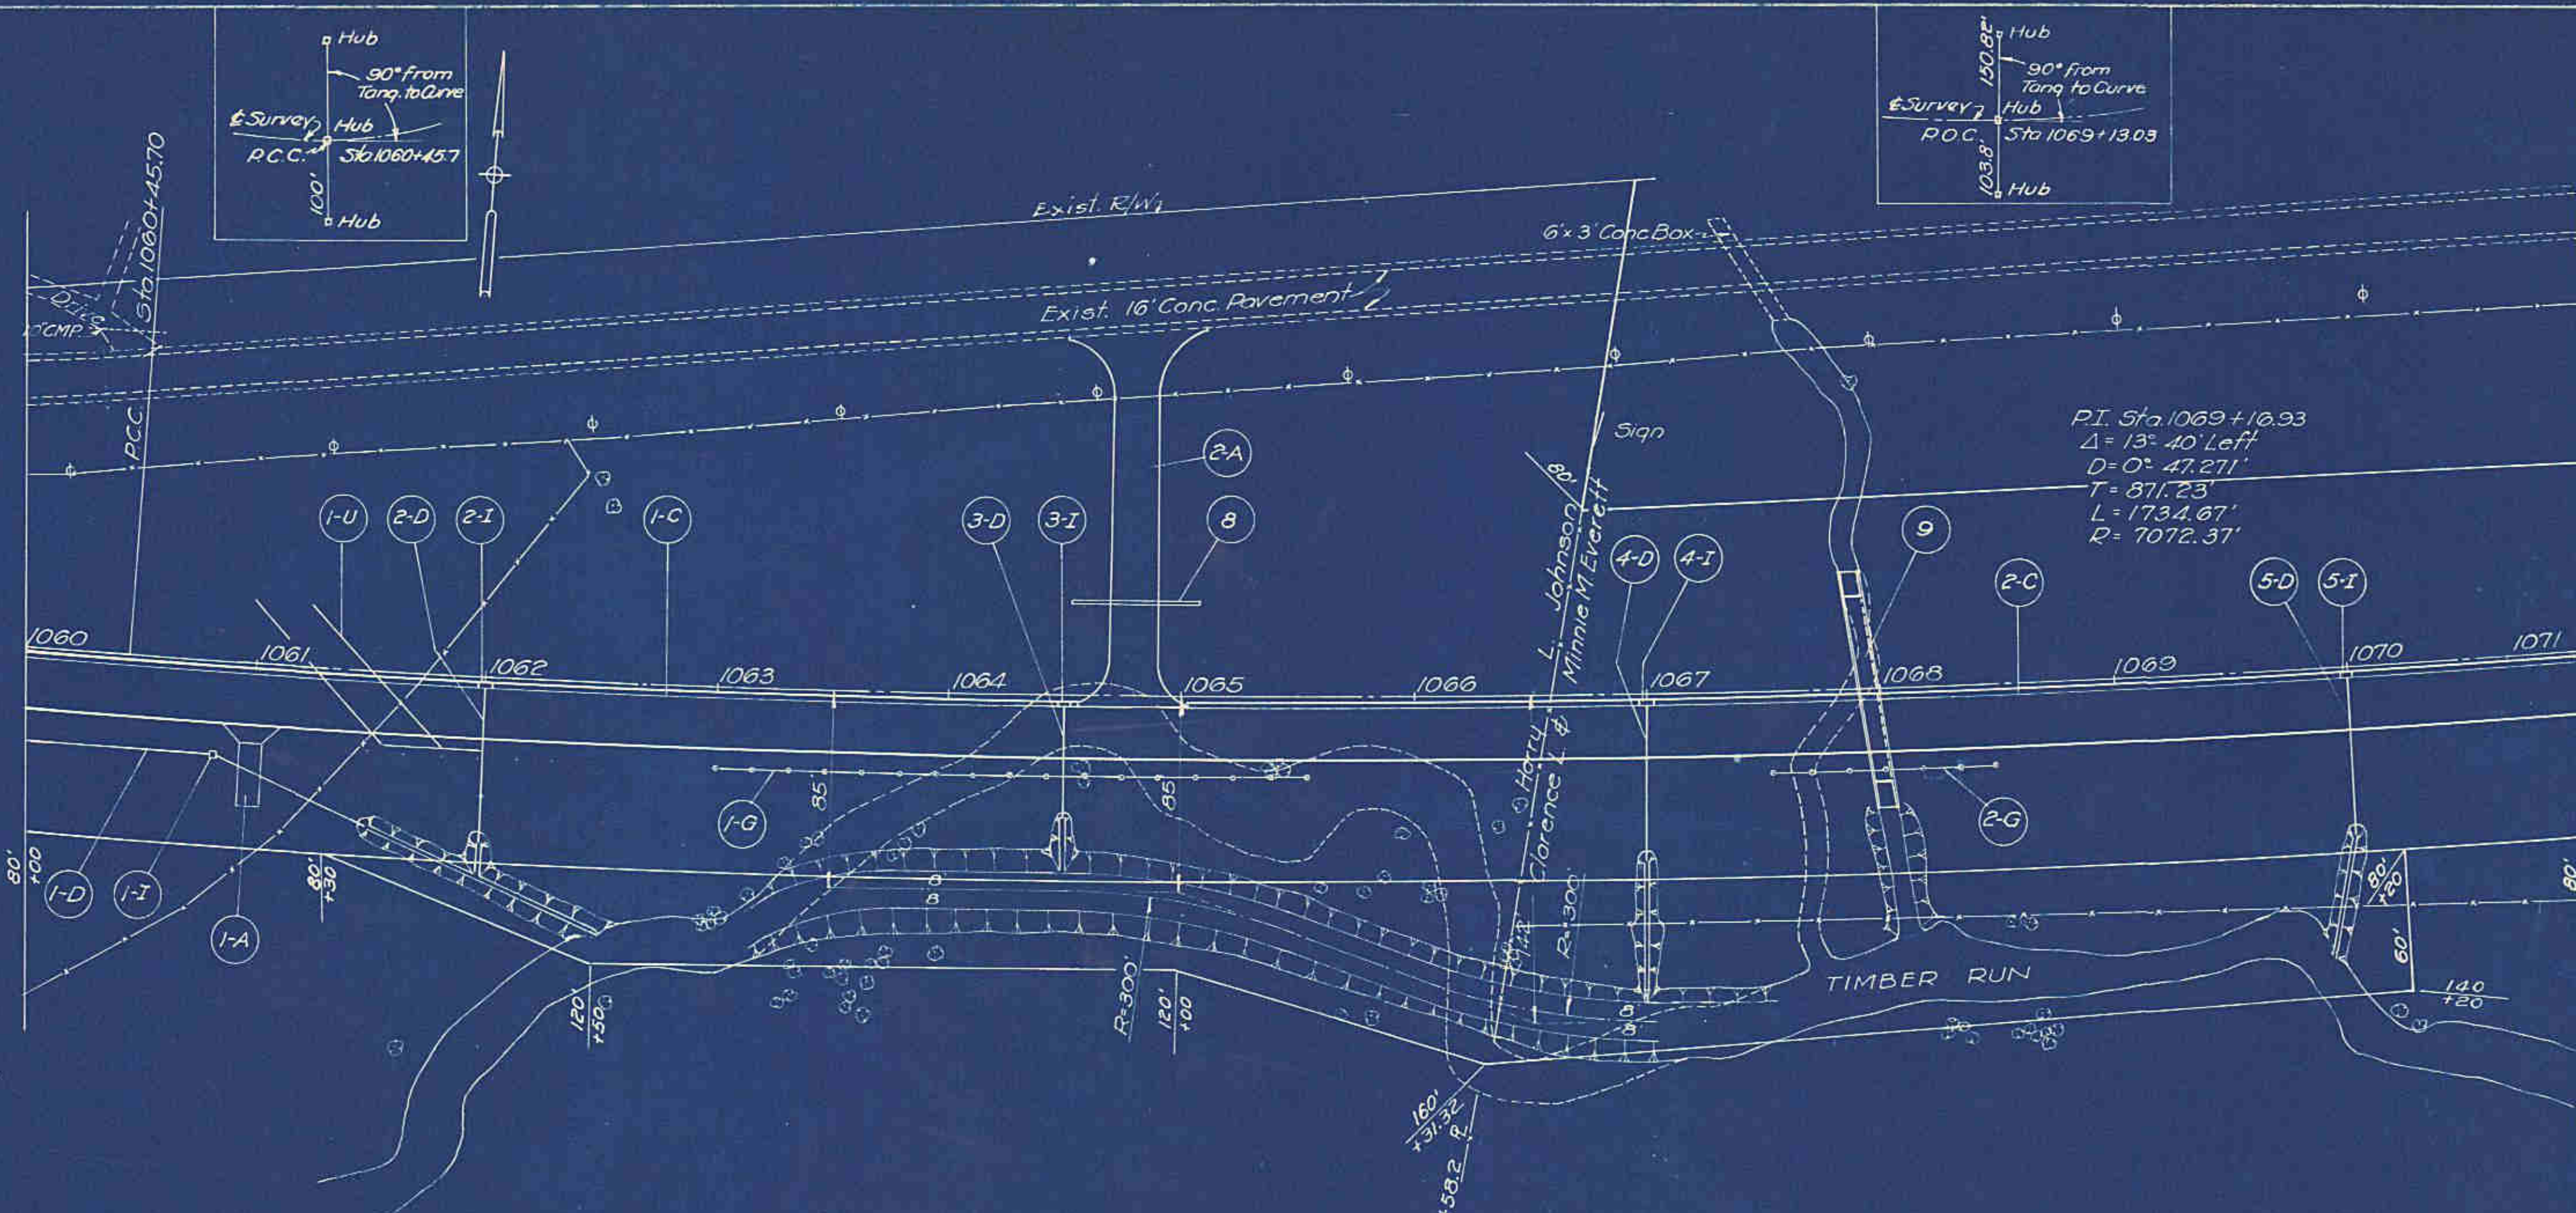

ROADWAY DRAINAGE (D)

Item No.	Station	Side	Pipe for Storm Sewers under Pav't Lin. Ft.	Outlet Pipe for Storm Sewers Lin. Ft.	Pipe for Rdwy Drainage Lin. Ft.	Pipe Specials 12" Lin. Ft.	2" Rdwy Drainage Outlet Pipe Lin. Ft.
1-D	1060+00	Rt	12"	12"	103	20	20
2-D	1062+00	Rt	26	40		1	
3-D	1064+50	Rt	26	22			
4-D	1067+00	Rt	26	42			
5-D	1070+00	Rt	26	42			
Totals			104	146	103	20	20

CATCH BASINS (I)

Item No.	Station	Side	Catch Basins 5' x 3' x 12" Units
1-I	1060+85	Rt	1
2-I	1062+00	Rt	1
3-I	1064+50	Rt	1
4-I	1067+00	Rt	1
5-I	1070+00	Rt	1
Totals			4

PAVEMENT REMOVAL (P)

Item No.	Station	6" P.C. Conc. Pav't Length Width Sq. Yds.
1-P	1060+85	
2-P	1062+00	
3-P	1064+50	
4-P	1067+00	
5-P	1070+00	
Totals		

CONCRETE CURB & GUTTER (C)

Item No.	Station	Side	Type 4 Integral Conc. Curb & Gutter Lin. Ft.
1-C	1060+00	Lt	446.4
2-C	1065+036	Lt	586.4
Totals			1032.8

PIPE UNDERDRAINS (U)

Item No.	Station	4" Pipe Under-drains 4' x 4' Wyes Lin. Ft.	Pipe Spec. Units
1-U	1061+55	206	2
Totals			

DRIVES & APPROACHES (A)

Item No.	Station	Side	5' W.B. Tr. Bound Macadam Side Surf. Tr'd Approach Sq. Yds.	Details on Sheet No.
1-A	1061+00	Rt	16	3.3
2-A	1064+80	Lt		35
Totals			16	3.3

GUARD RAIL (G)

Item No.	Station	Side	Guard Rail Lin. Ft.	Guard Rail Lin. Ft.
1-G	1063+00	Rt	256	
2-G	1067+52	Rt	96	
Totals			352	

STRUCTURES 20' SPAN & UNDER

Struct No.	Station	Description	Details on Sheet No.
9	1067+95	8' 6" x 104' Large Box Culvert	151
8	1064+80	18" x 55' Std Pipe Culvert (Side Road)	150

Excavation 10859 Cu. Yds.
Embankment 24845 Cu. Yds.
Emb. + 12% 27826 Cu. Yds.
Waste 228 Cu. Yds.