


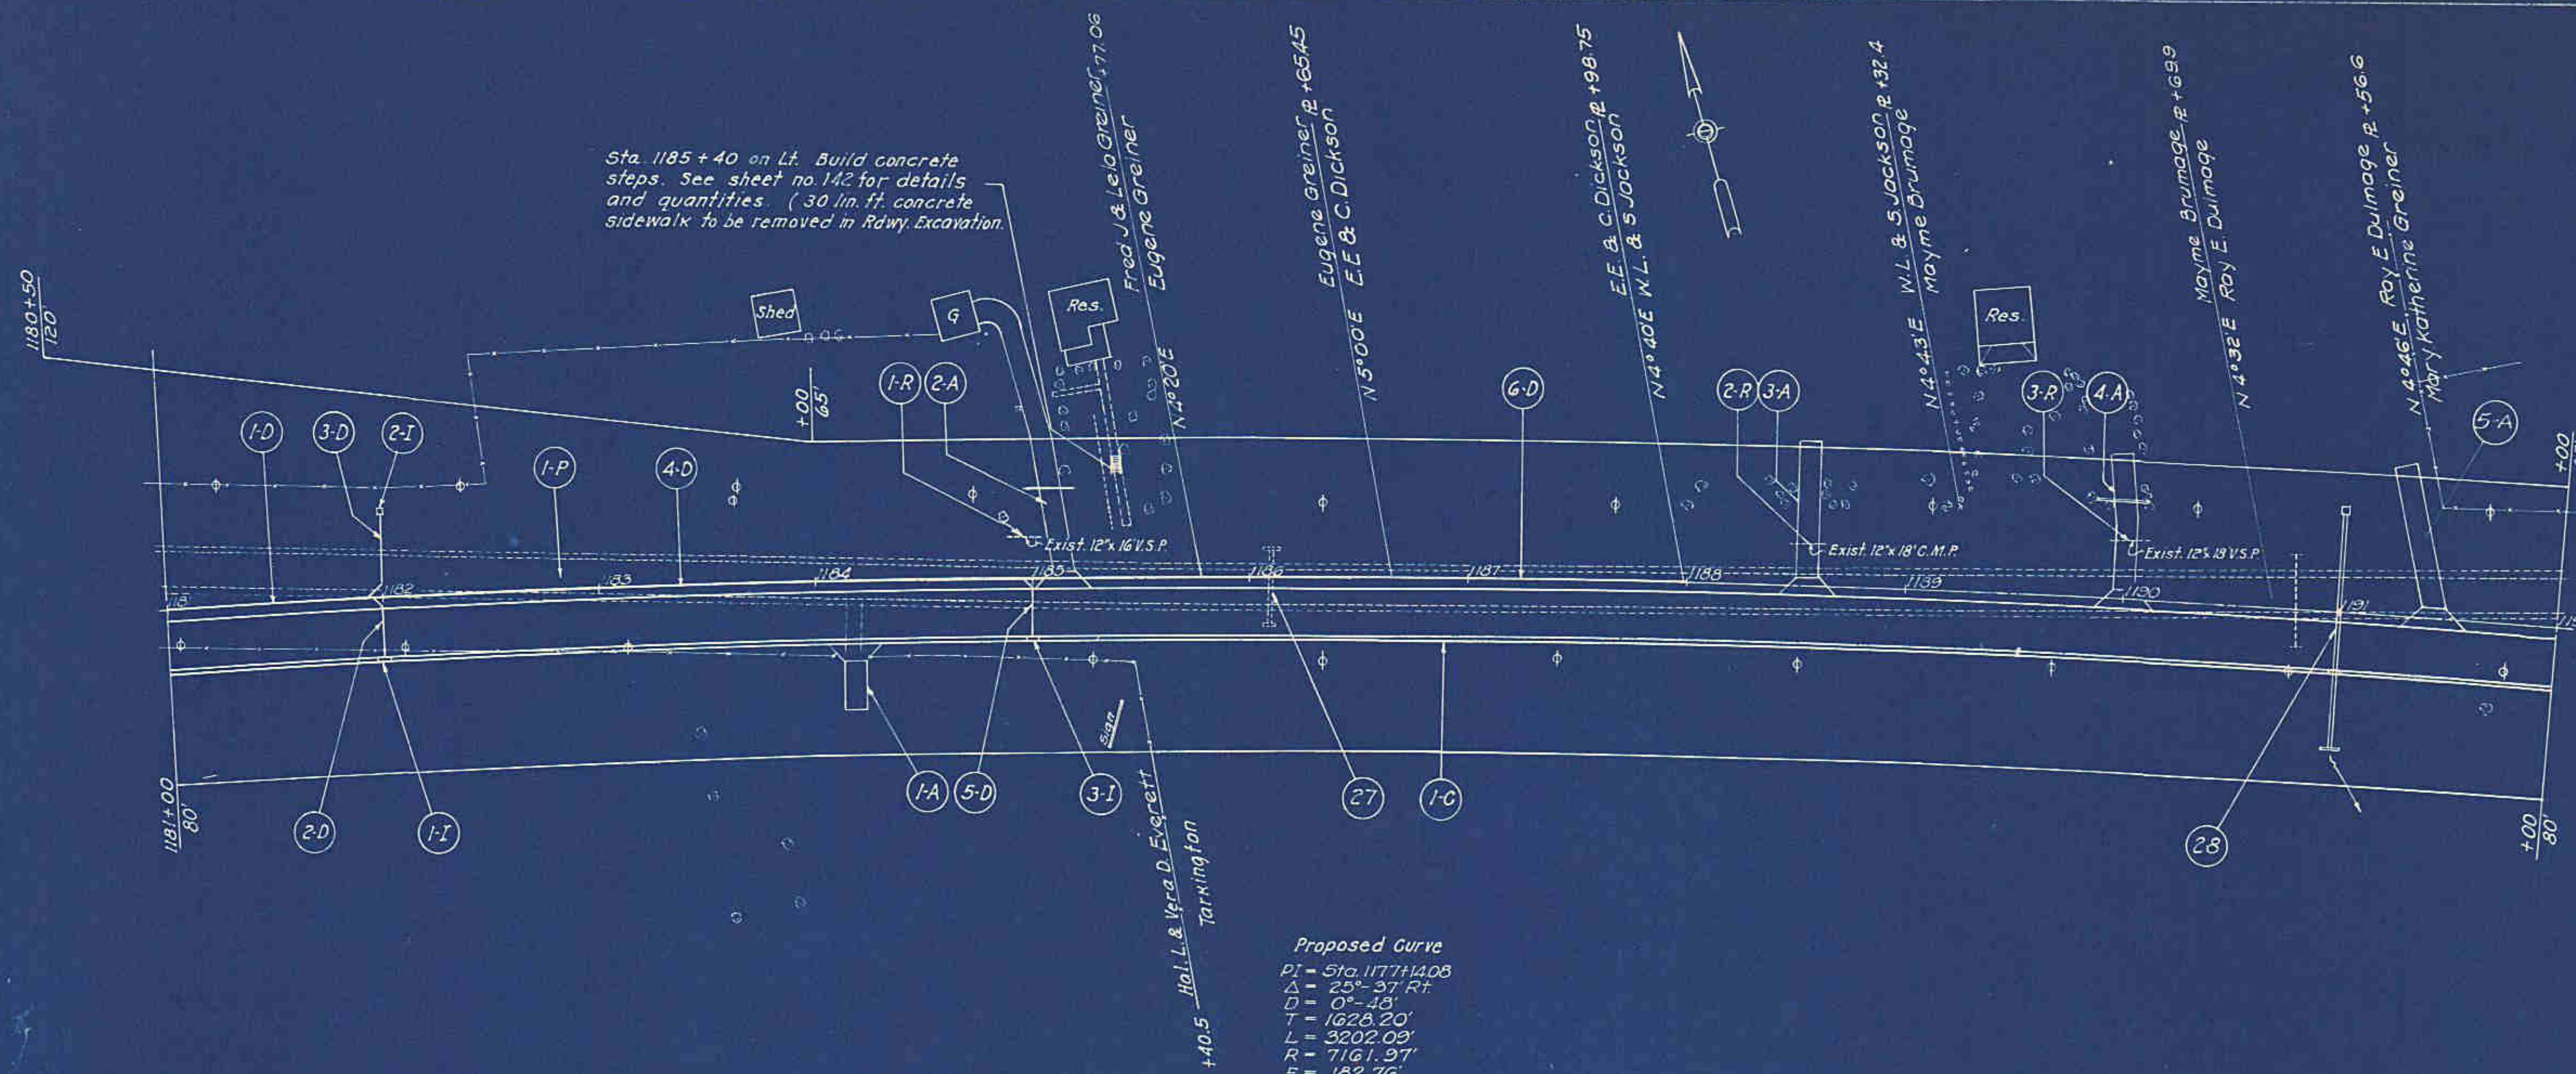

ROADWAY DRAINAGE (D)									
Item No.	Station		Side	Pipe for Storm Pipe for Roadway		Sewers under Drainage Including		Pipe Specials	
	From	To		12"	15"	12"	15"	12"	15"
1-D	1181+00	1182+00	Rt.						
2-D	1182+00		Rt.	26					
3-D	1182+00		Lt.	40					
4-D	1182+00	1185+00	Rt.		296				
5-D	1185+00		Rt.	26					
6-D	1185+00	1188+00	Rt.		300				
Totals				92	300	296	94	1	2

CATCH BASINS (I)				
Item No.	Station	Side	Catch Basins	
			5'x3'x12" No. 1	5'x3'x12" No. 2
1-I	1182+00	Rt.	1	
2-I	1182+00	Lt.		1
3-I	1185+00	Rt.	1	
Totals			2	1

PAVEMENT REMOVAL (P)				
Item No.	Station		8" PC Conc. Pavement	
	From	To	Length	Width
1-P	1181+00	1192+00	1100	16
Totals				1955.6

CONCRETE CURB & GUTTER (C)				
Item No.	Station		Side	Type 4 Integral Conc. Curb & Gutter Lin. Ft.
	From	To		
1-C	1181+00	1192+00	Rt.	1085.0
Totals				1085.0

PIPE REMOVAL (R)			
Item No.	Station	Side	Remove & Store Pipe Various Sizes Lin. Ft.
1-R	1184+00	Lt.	16
2-R	1186+55	Lt.	18
3-R	1190+00	Lt.	18
Totals			52

DRIVES & APPROACHES (A)				
Item No.	Station	Side	5' W.B. Tr. Bound Pipe for Macadam Side Driveways	
			Surf. Trfd. Approach Sq. Yds.	Curbs Lin. Ft.
1-A	1184+18	Rt.	16	3.1
2-A	1185+14	Lt.	16	9.5
3-A	1186+55	Lt.	16	8.0
4-A	1190+00	Lt.	16	7.7
5-A	1191+45	Lt.	16	7.5
Totals			80	35.8

STRUCTURES 20 FT. SPAN & UNDER			
Struct. No.	Station	Description	Details on Sheet No.
27	1186+09.3	Remove Exist. 18" x 36" C.I. Culvert incl. Hwalls	162
28	1191+00	24" x 110'-9" Pipe Culvert	150

