


MUSKINGUM COUNTY
S. H. I SEC. I-PT.

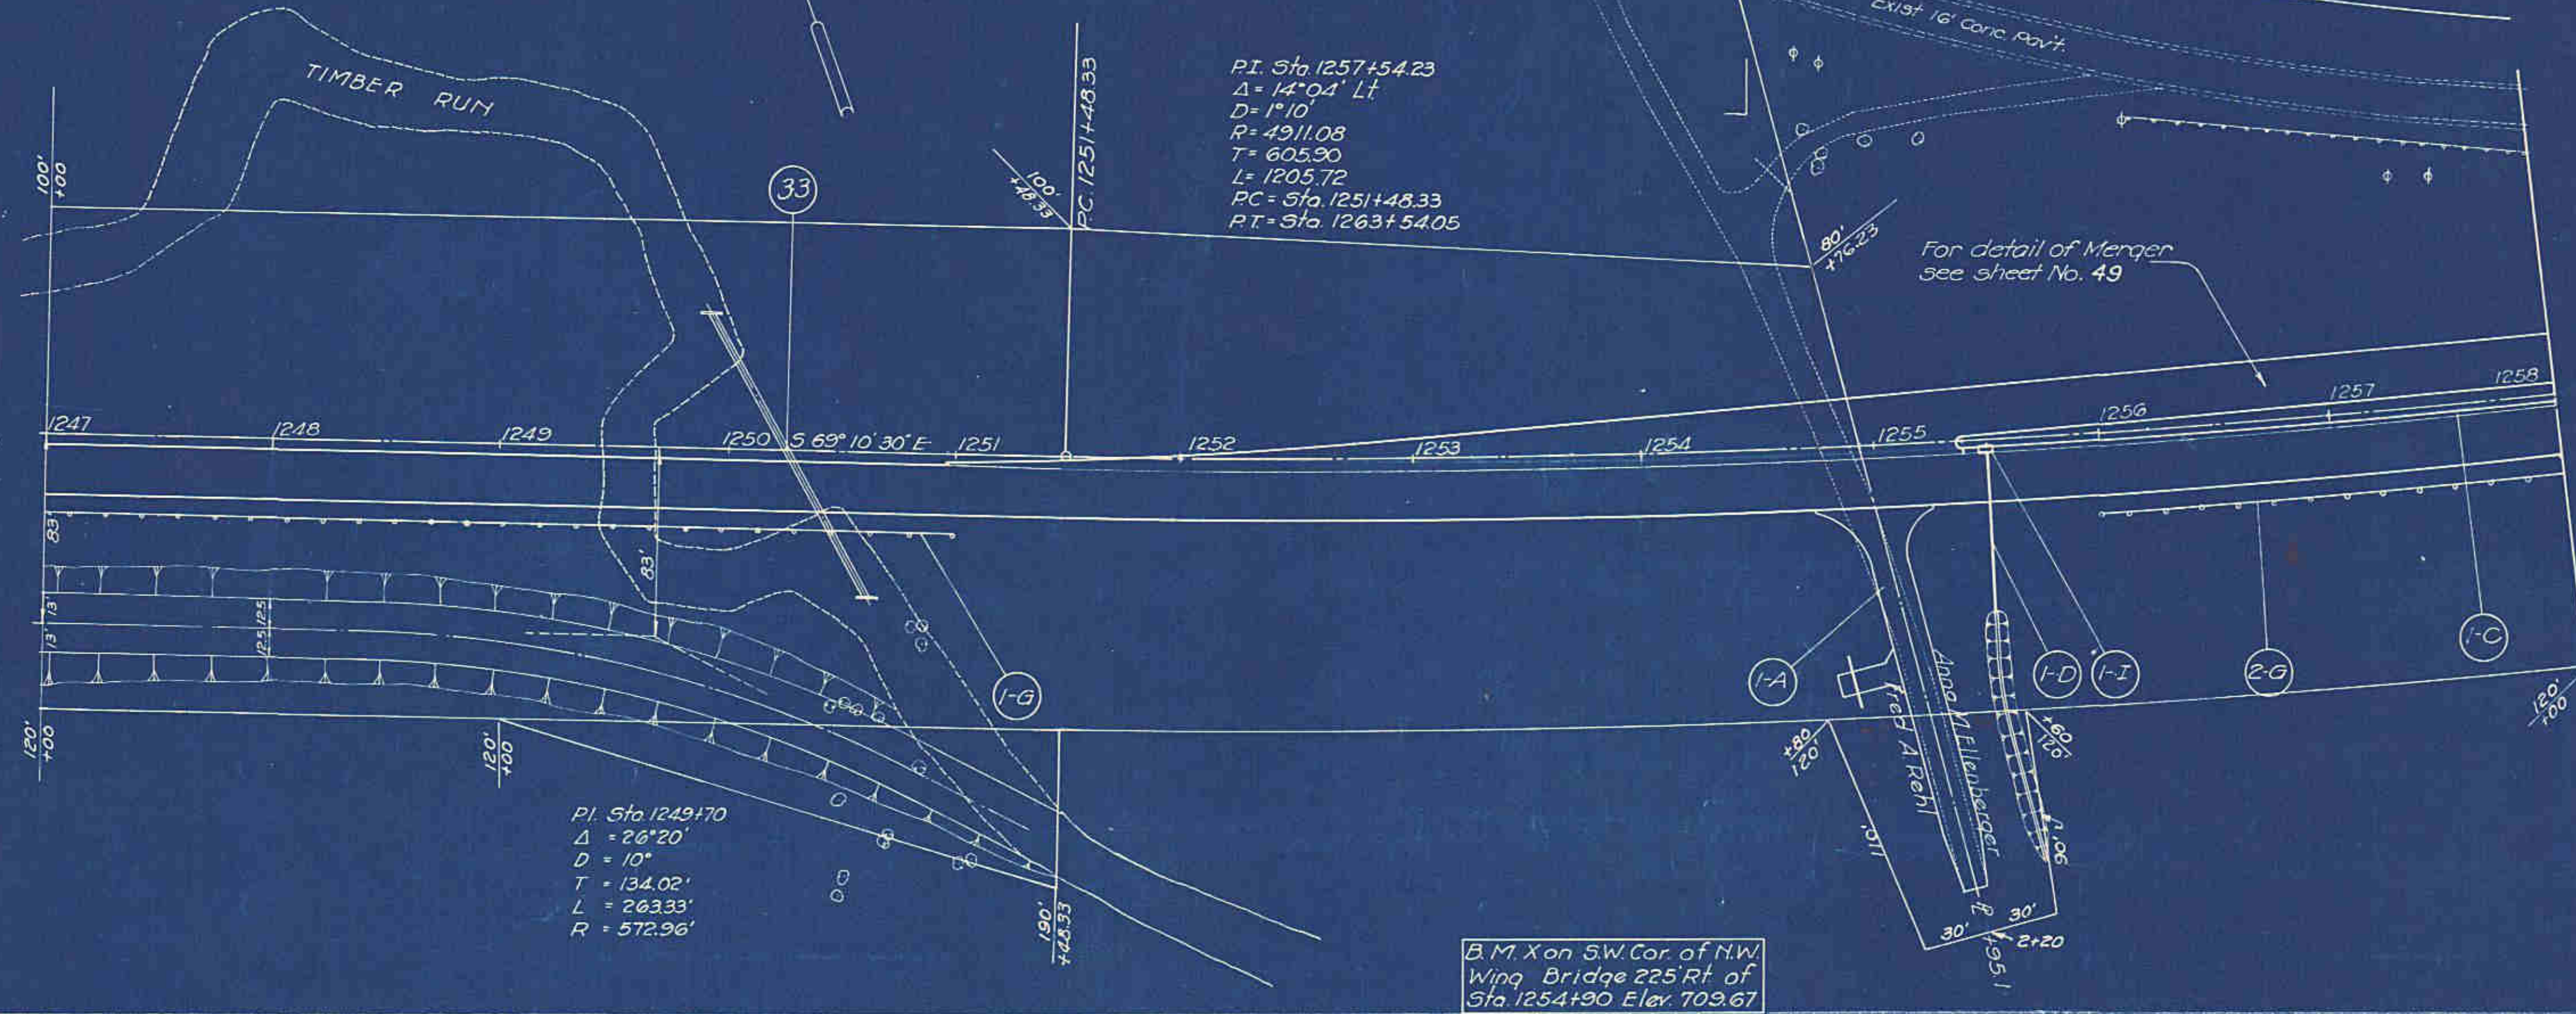

ROADWAY DRAINAGE (D)					
Item No	Station		Pipe for Storm Sewers under Pavt.	Outlet Pipe for Storm Sewers	
	From	To	Side	12" Lin. Ft.	12" Lin. Ft.
1-D	1255+50		Rt	26	47
Totals				26	47


CATCH BASINS (I)			
Item No	Station	Side	Std Catch Basin Sta No. 3 Modified Units
1-I	1255+50	Rt	1
Total			1

CONCRETE CURB & GUTTER (C)				
Item No	Station		Side	Type 4 Conc Curb & Gutter Lin. Ft.
	From	To		
1-C	1255+99.05	1258+00	Rt.	256
	Total			256

DRIVES & APPROACHES (A)			
Item No	Station	Side	For Details See Sh. No.
1-A	1254+95.1	Rt	46

GUARD RAIL (G)				
Item No.	Station		Side	Type
	From	To		Guard Rail Lin. Ft.
1-G	1247+00	1251+00	Rt.	400
2-G	1255+96	1258+00	Rt.	204
Total				604

STRUCTURES 20 FT. SPAN & UNDER			
Struc No	Station	Description	Details on Sheet No.
33	1250+25	48" x 136'-0" Pipe Culvert	160

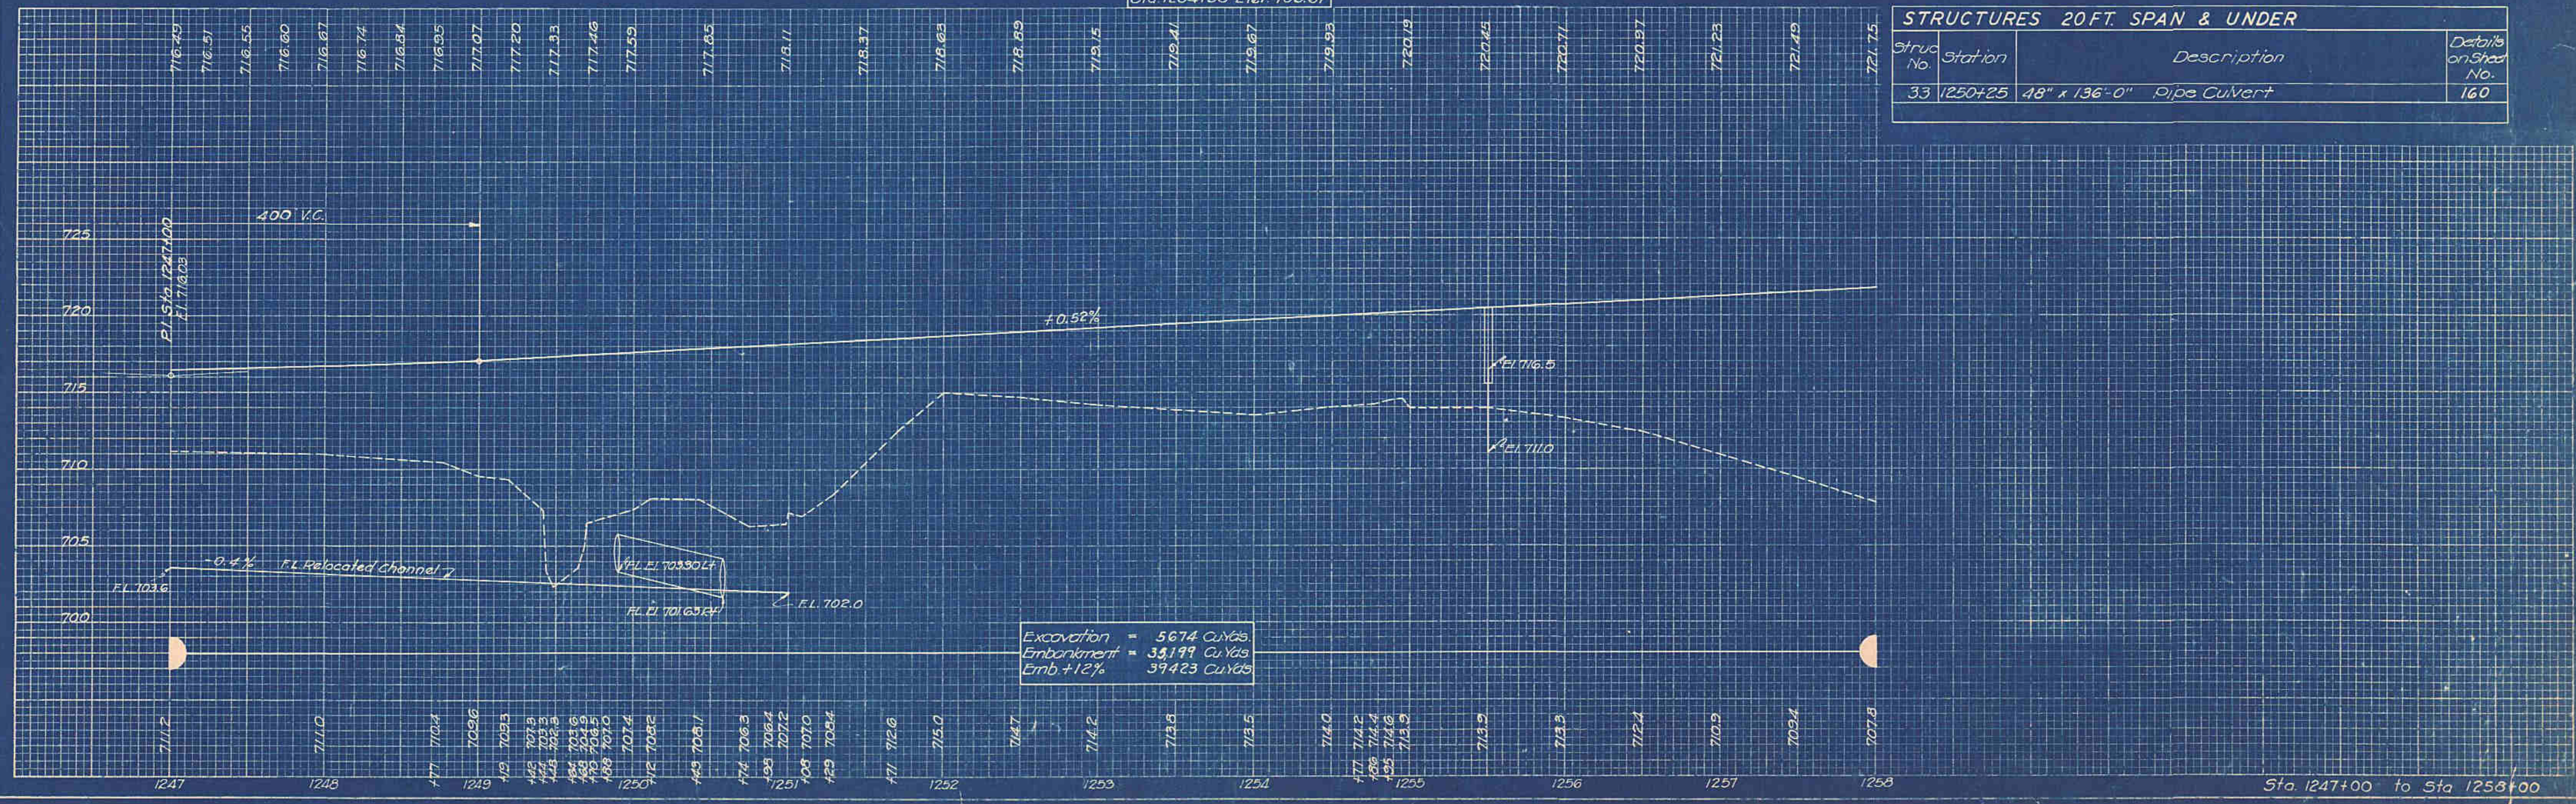

Excavation = 5674 Cu Yds
Embankment = 38199 Cu Yds
Emb +12% = 39423 Cu Yds