
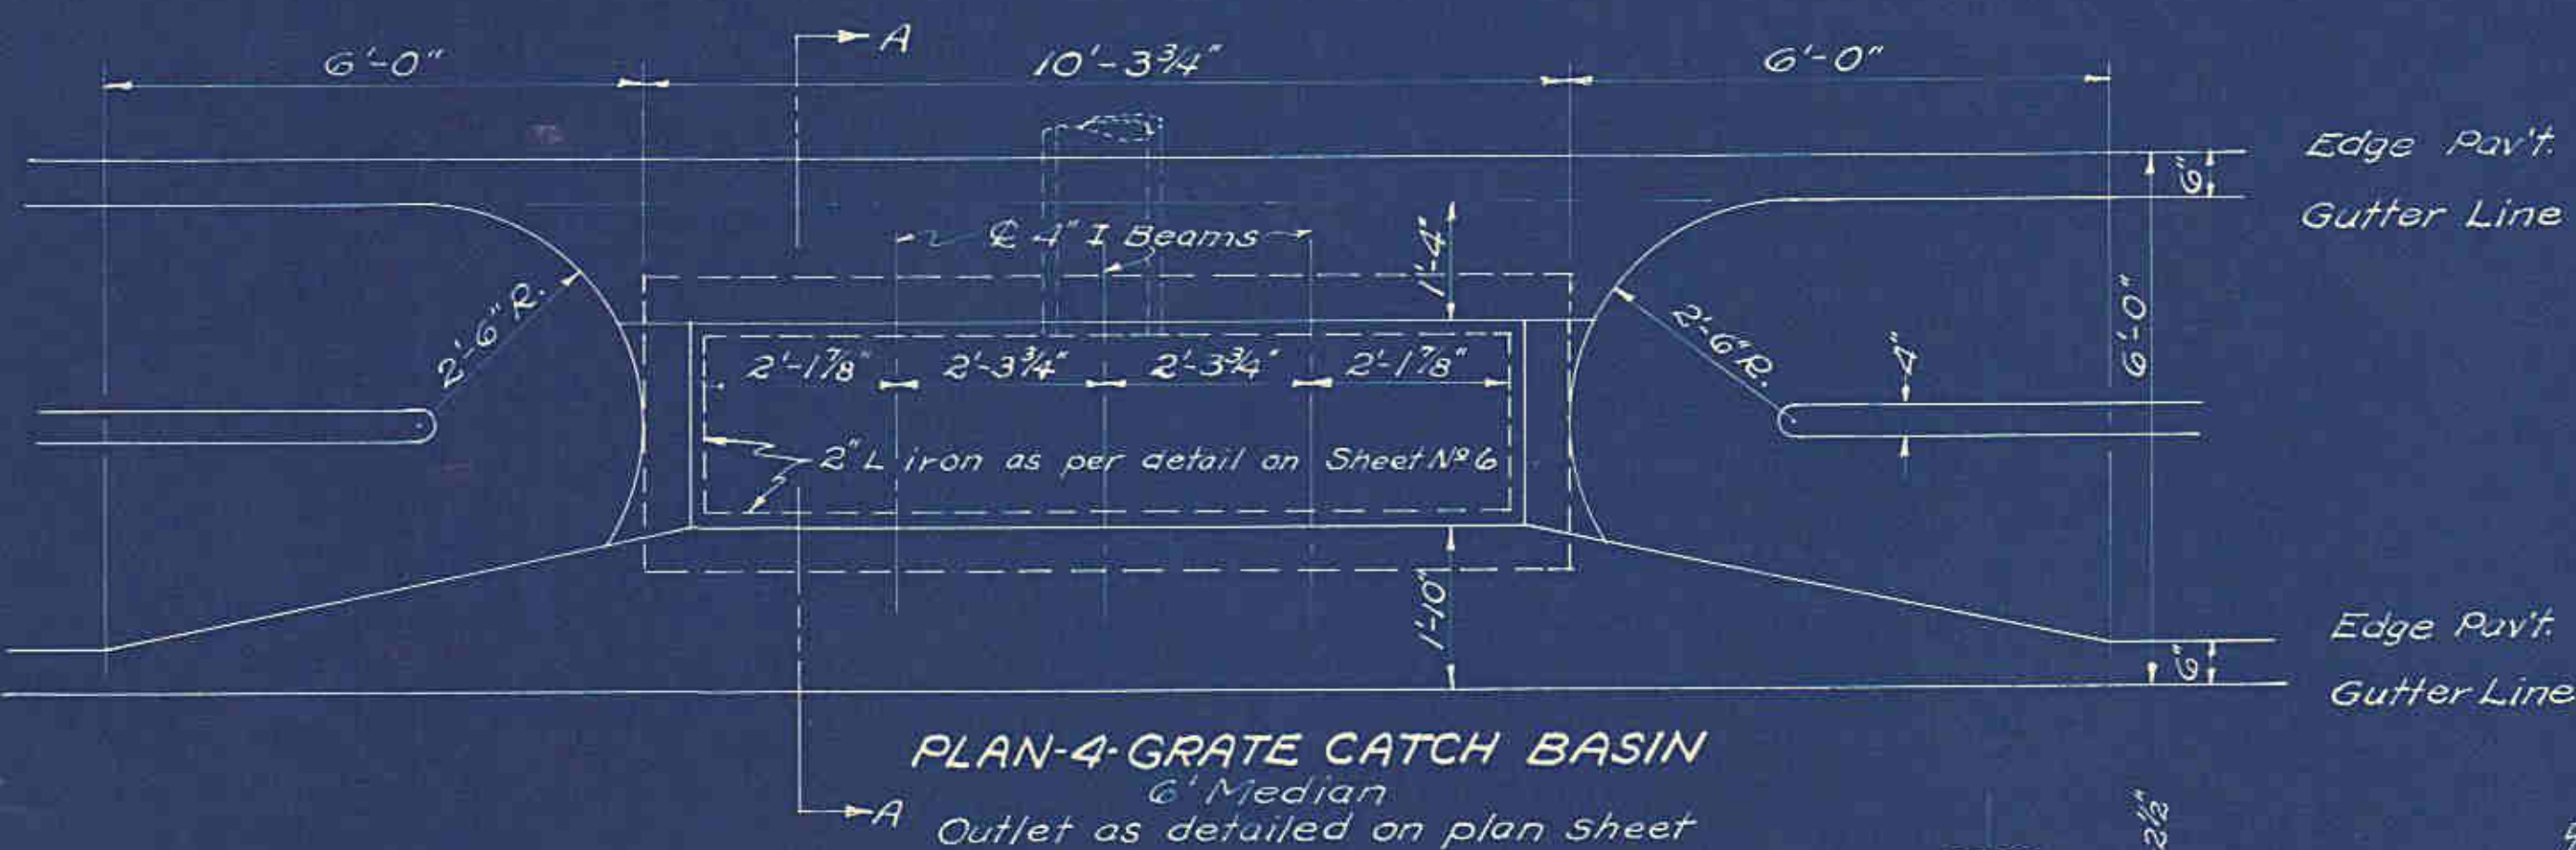


DETAIL OF TRANSITION

STA. 1250+96.71 to STA. 1264+03.4


FED. RD. DIVISION	STATE	PROJECT	TYPE FUNDS
2	OHIO	F-633-10	Post War

LIC-40-28.53
MUS-40-0.00-5.03

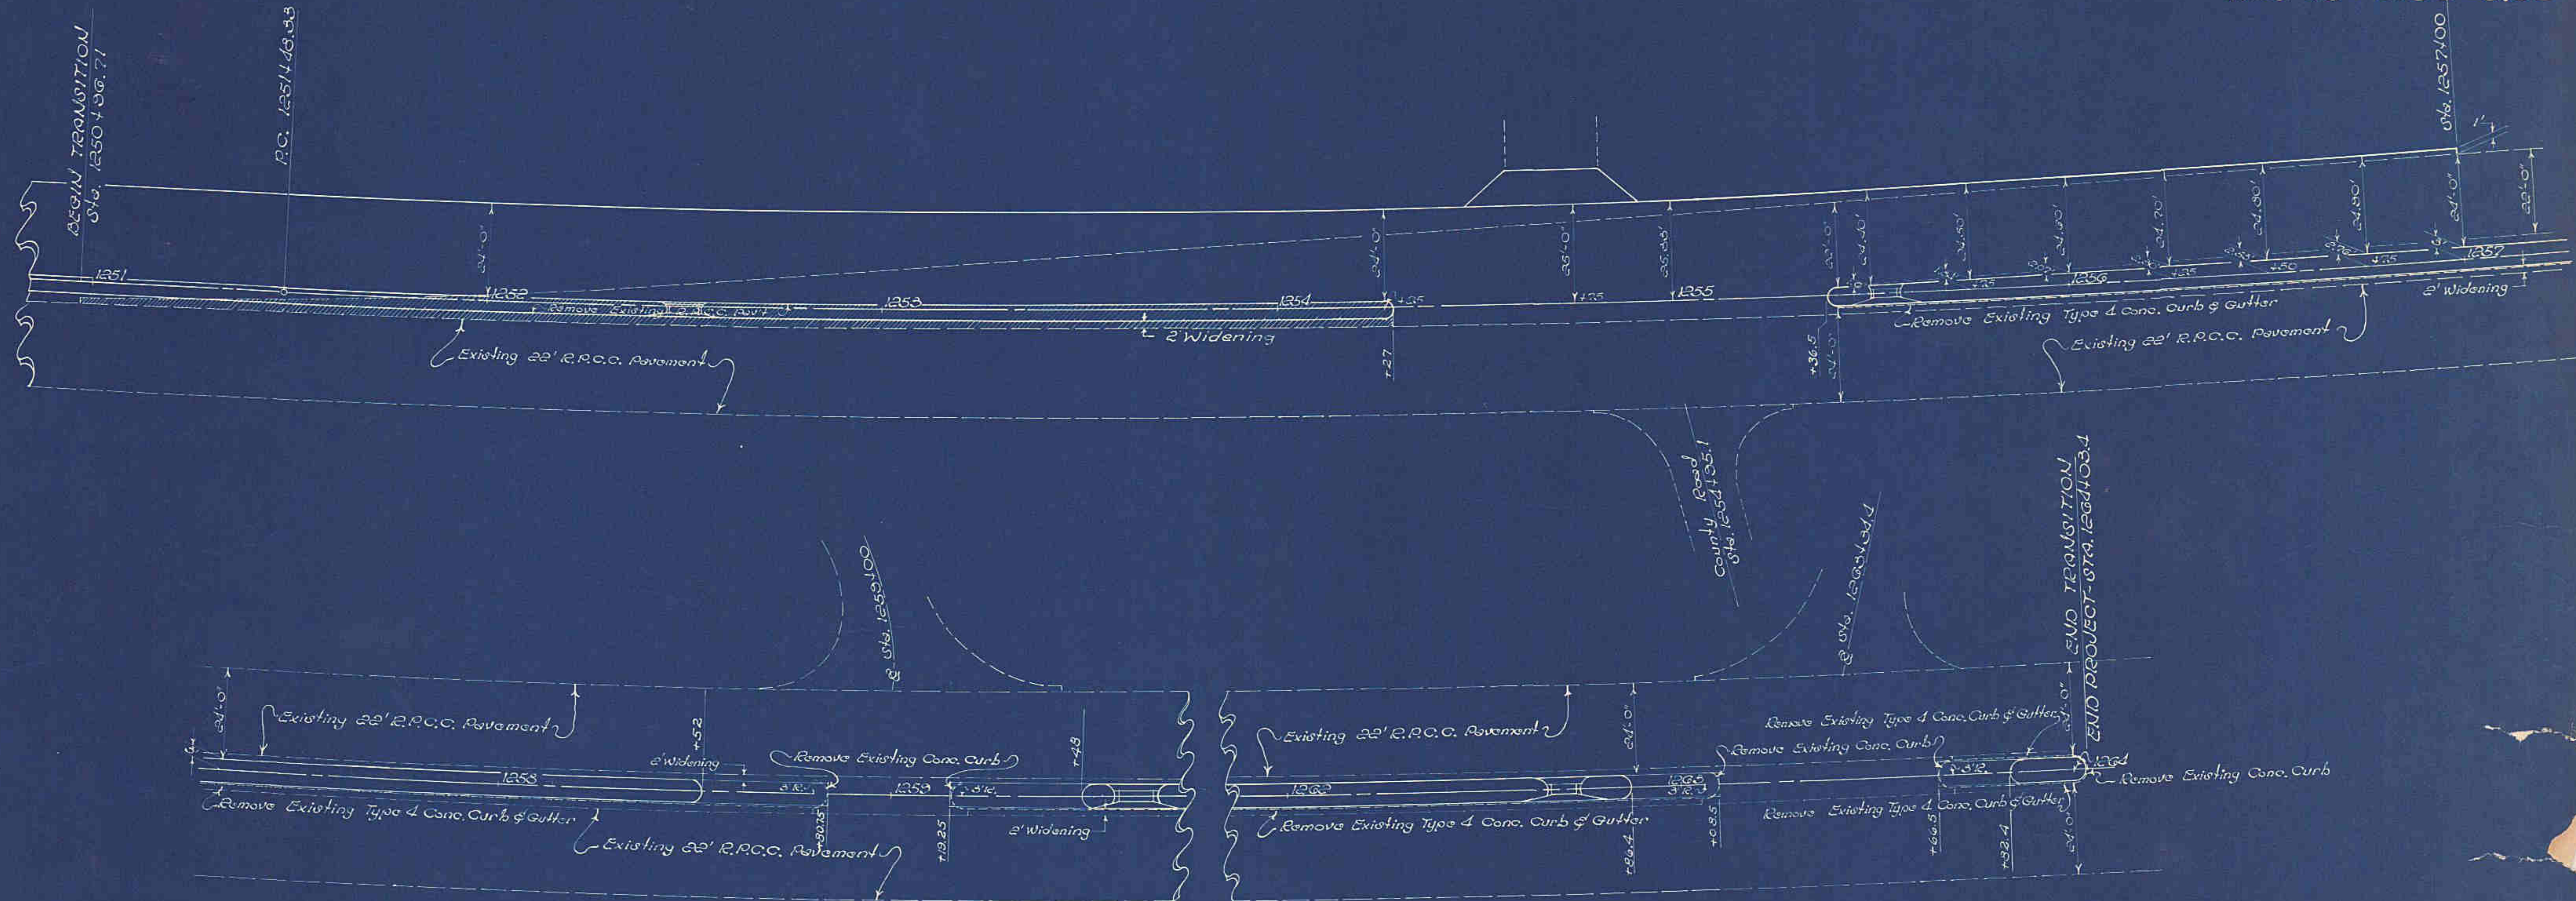


NOTE: - Use 2" angle iron at all bearing points for grates as per Detail on Sheet N-26. Standard 2'-3 1/2" x 2'-3 1/2" Grates used thruout.

SECTION A-A

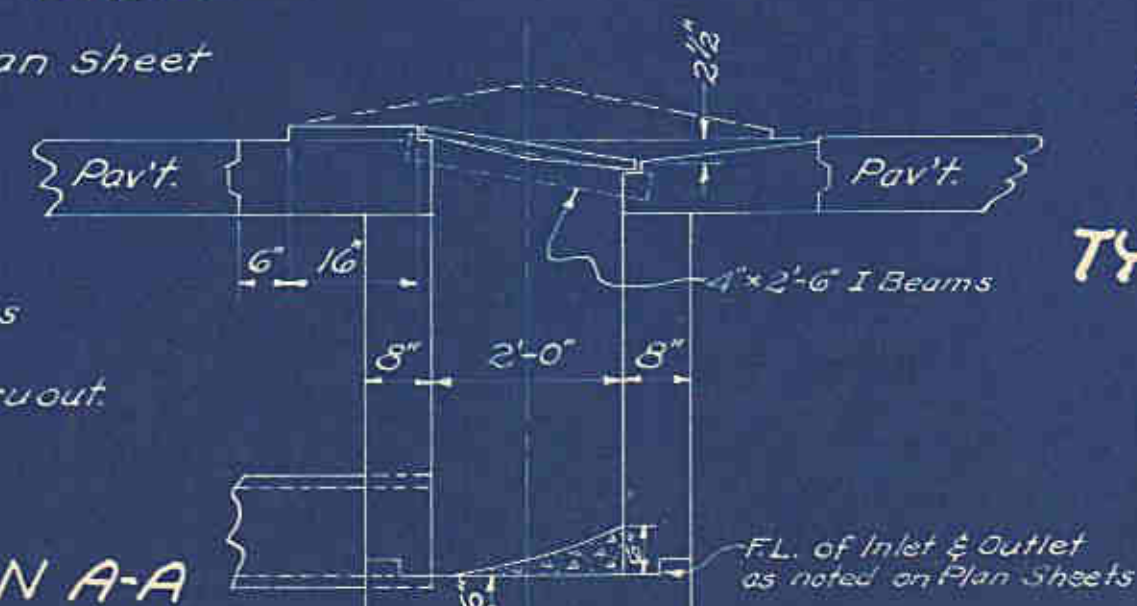

TYPICAL SECTION of MEDIAN

STA. 1255+03 to STA. 1264+03
For additional details see cross sections.
Scale 1/8" = 1'

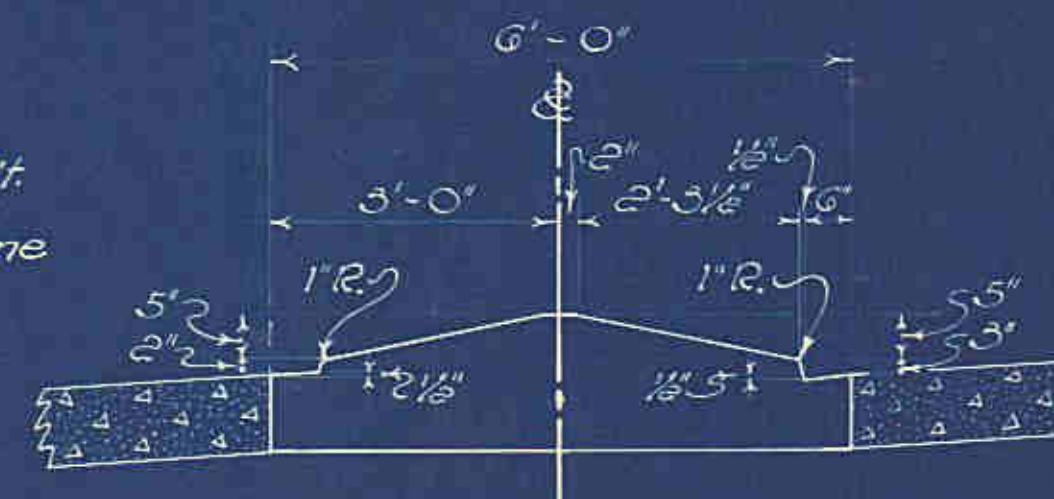

ESTIMATED QUANTITIES

E-8	Removal & Disposal of Existing Concrete Curb & Gutter.	837.1	Lin.
E-8	Removal & Disposal of Existing Pavement.	258.2	Sq. Yd.
T-71	8" Reinforced Portland Cement Concrete Widening.	1,122.6	Sq. Yd.
B-70	8" Portland Cement Concrete Widening.	244.6	Sq. Yd.
I-21	Portland Cement Concrete Median & Traffic Island Pavement.	563.4	Sq. Yd.
T-35	1 1/2" Asphaltic Concrete Surface Course, Type "D".	121.0	Cu. Yd.
B-35	1" Minimum Asphaltic Concrete Leveling Course.	93.3	Cu. Yd.
B-35	Asphaltic Concrete 1/2" Extra Leveling Course.	44.4	Cu. Yd.
T-70	9" R.C.C. Pav't in Median Area	63.7	Sq. Yd.
T-50	Bituminous Tack Coat.	348.5	Sq. Yd.
55-5	Classified Embankment	340.7	Cu. Yd.