



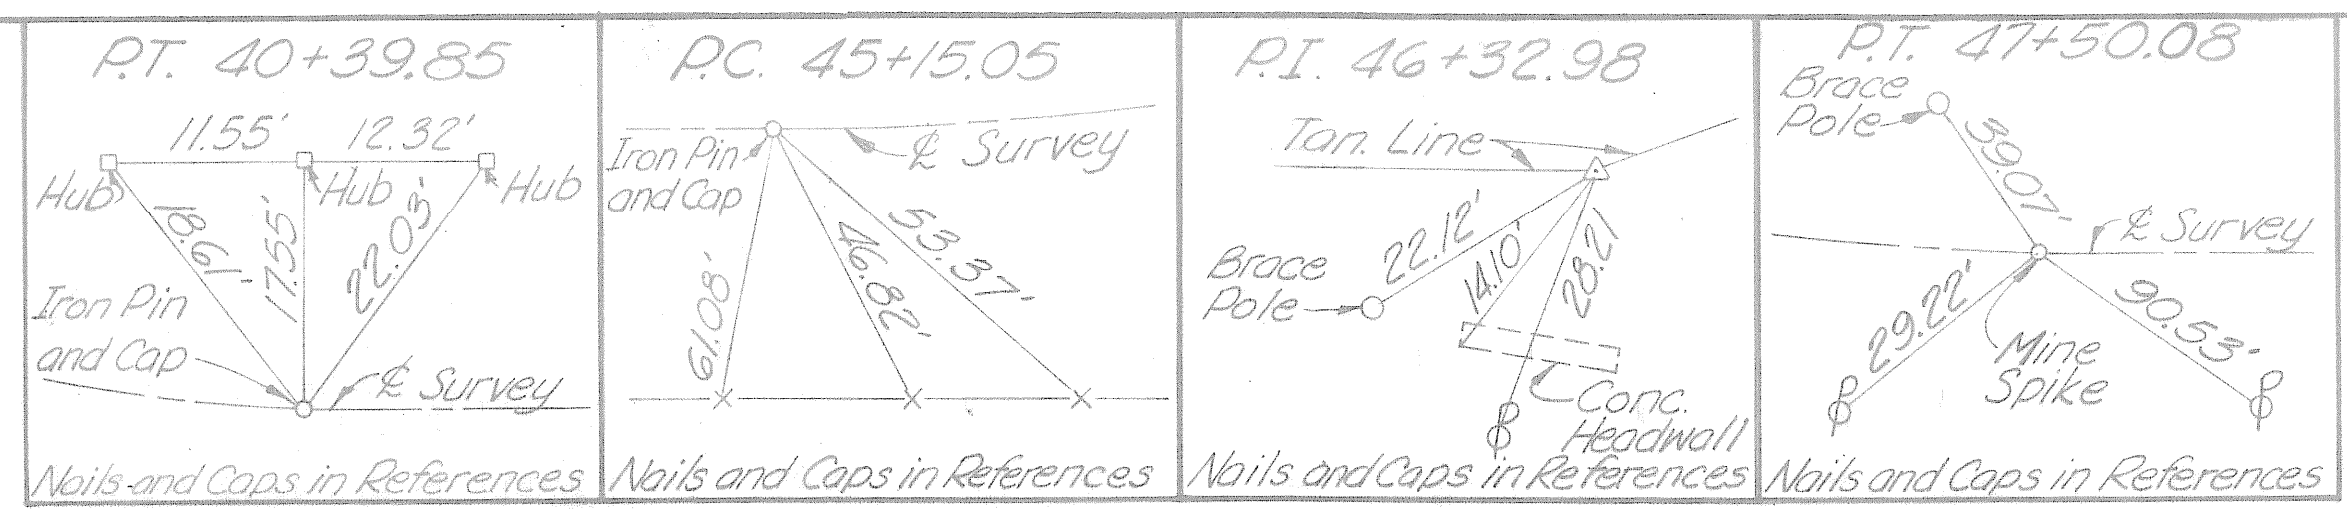

Calc. By J.C.N. 10-22-73
Ckd By P.O.H. 10-22-73

Survey Curve No. 3
P.I. 46+32.98
 $\Delta = 11^\circ 45' 05''$ L.T.
 $D = 5^\circ 00' 00''$
 $T = 117.93'$
 $L = 235.03'$
 $E = 6.05'$
 $R = 1145.92'$

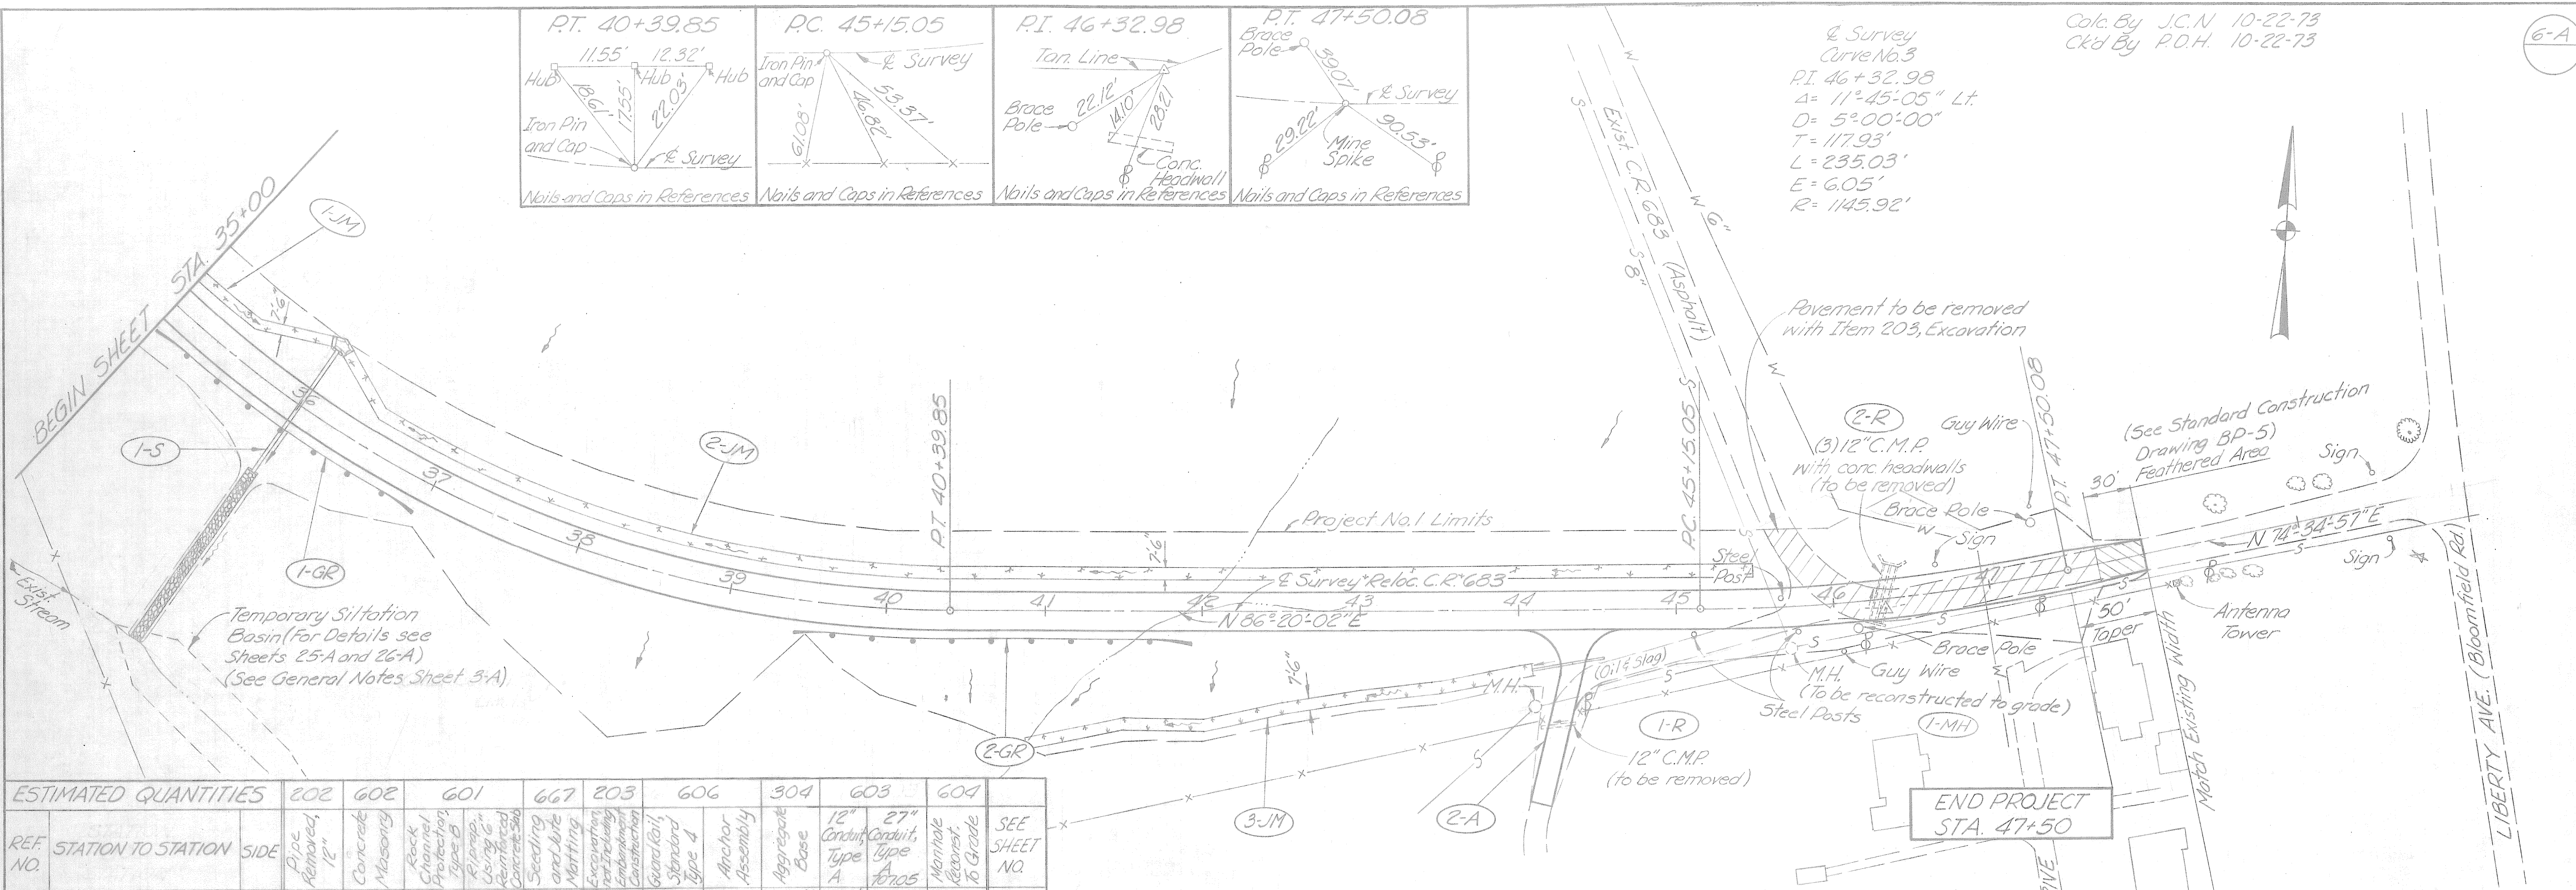

ESTIMATED QUANTITIES		202	602	601	667	203	606	304	603	604	
REF. NO.	STATION TO STATION	SIDE	Pipe Removed, 12"	Concrete	Masonry	Rock Channel Protection, Type B	Flagging, Using 6" Reinforced Concrete Slab	Seeding and Laying	Excavation and Laying	Excavation and Laying	SEE SHEET NO.
			Lin. Ft.	Cu. Yd.	Cu. Yd.	Sq. Yd.	Sq. Yd.	Cu. Yd.	Lin. Ft.	Each	
1-GR	35+01.29 to 36+36.93	Rt.							150	2	
2-GR	39+45 to 41+92.62	Rt.							200	2	
1-JM	35+00 to 35+91.50	Lt.									
2-JM	36+07.50 to 45+50	Lt.									
1-MH	45+13	Rt.									
1-R	44+15 to 44+38	Rt.	22								
2-R	46+30	Rt.	114								
3-JM	40+89 to 44+08	Rt.									
1-S	36+00	Lt.		106	67	12	271	24		92	24-A
2-A	44+42.64	Rt.							35	44	22-A
TOTALS			236	106	67	12	1126	24	350	4	

