


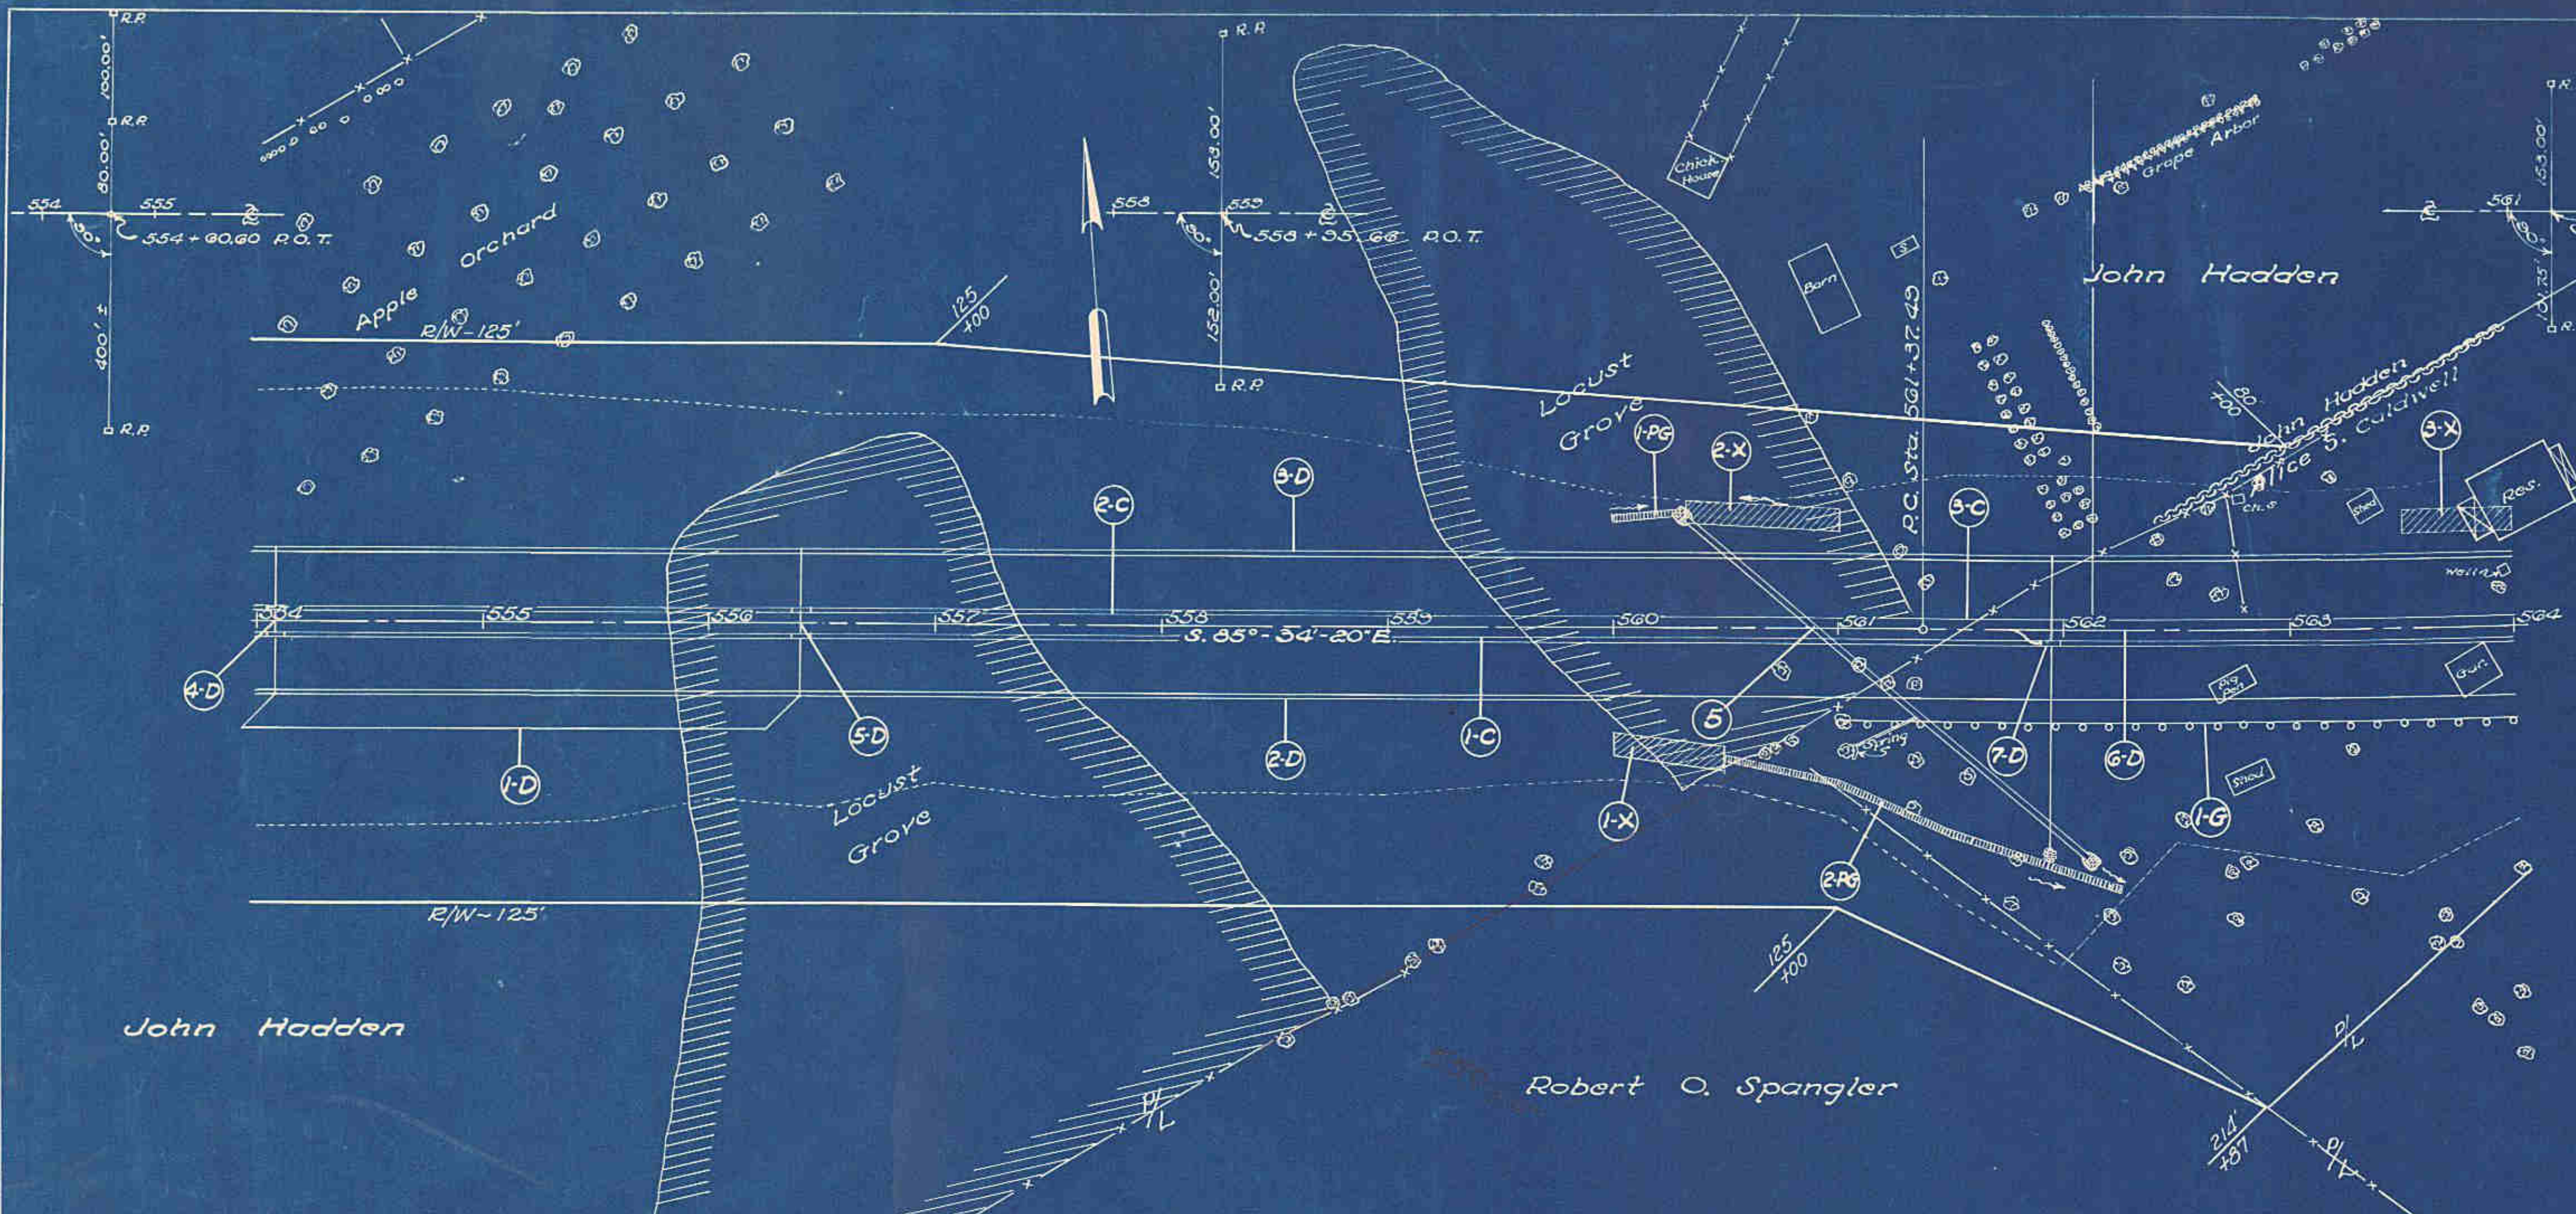

CURB & GUTTER (C)				
Item No.	Station		Side	Type 4-Comb. Curb & Gutter Lin. Ft.
1-C	554+00	564+00	Rt.	1000.00
2-C	554+00	559+12.49	Lt.	512.49
3-C	559+12.49	564+00	Lt.	
Totals				1512.49


PAVED GUTTER (PG)				
Item No.	Station		Side	Type 1 Lin. Ft.
1-PG	560+00	560+27	Lt.	27
2-PG	560+50	562+25	Rt.	135
Total				212

GUARD RAIL (G)				
Item No.	Station		Side	New Lin. Ft.
1-G	561+00	564+00	Rt.	300
Total				300

STRUCTURES 20' SPAN & UNDER							
Struct. No.	Station	Present	Proposed	Detail	Length	Width	Depth
5	560+90				24'	23'	16'

SODDING (X)				
Item No.	Station		Side	Sodding Sq. Yds.
1-X	560+00	560+50	Rt.	50
2-X	560+30	561+00	Lt.	68
3-X	563+50	564+00	Lt.	50
Total				166

DRAINAGE (D)											
Item No.	Station		Side	12" Pipe for S.S. Under Pav't. Lin. Ft.	12" Pipe for S.S. Under Pav't. Lin. Ft.	12" 6" Tee for S.S. Under Pav't. Lin. Ft.	12" 45" Bend for S.S. Under Pav't. Lin. Ft.	12" 45" Bend for S.S. Under Pav't. Lin. Ft.	6" Pipe for R.W. Inlet Full depth R.P. Lin. Ft.	Riprap Type A Sq. Yds.	6" x 6" Tee for R.W. Units
1-D	554+00	556+26	Rt.								
2-D	554+00	560+00	Rt.								
3-D	554+00	564+00	Lt.								
4-D	554+03			2	82		2	1			2
5-D	556+41			2	82		2	1			2
6-D	560+00	564+00	Lt.						400		
7-D	561+95		Rt.	1	62	81	1				1
Totals				5	226	81	5	2	226	1	5

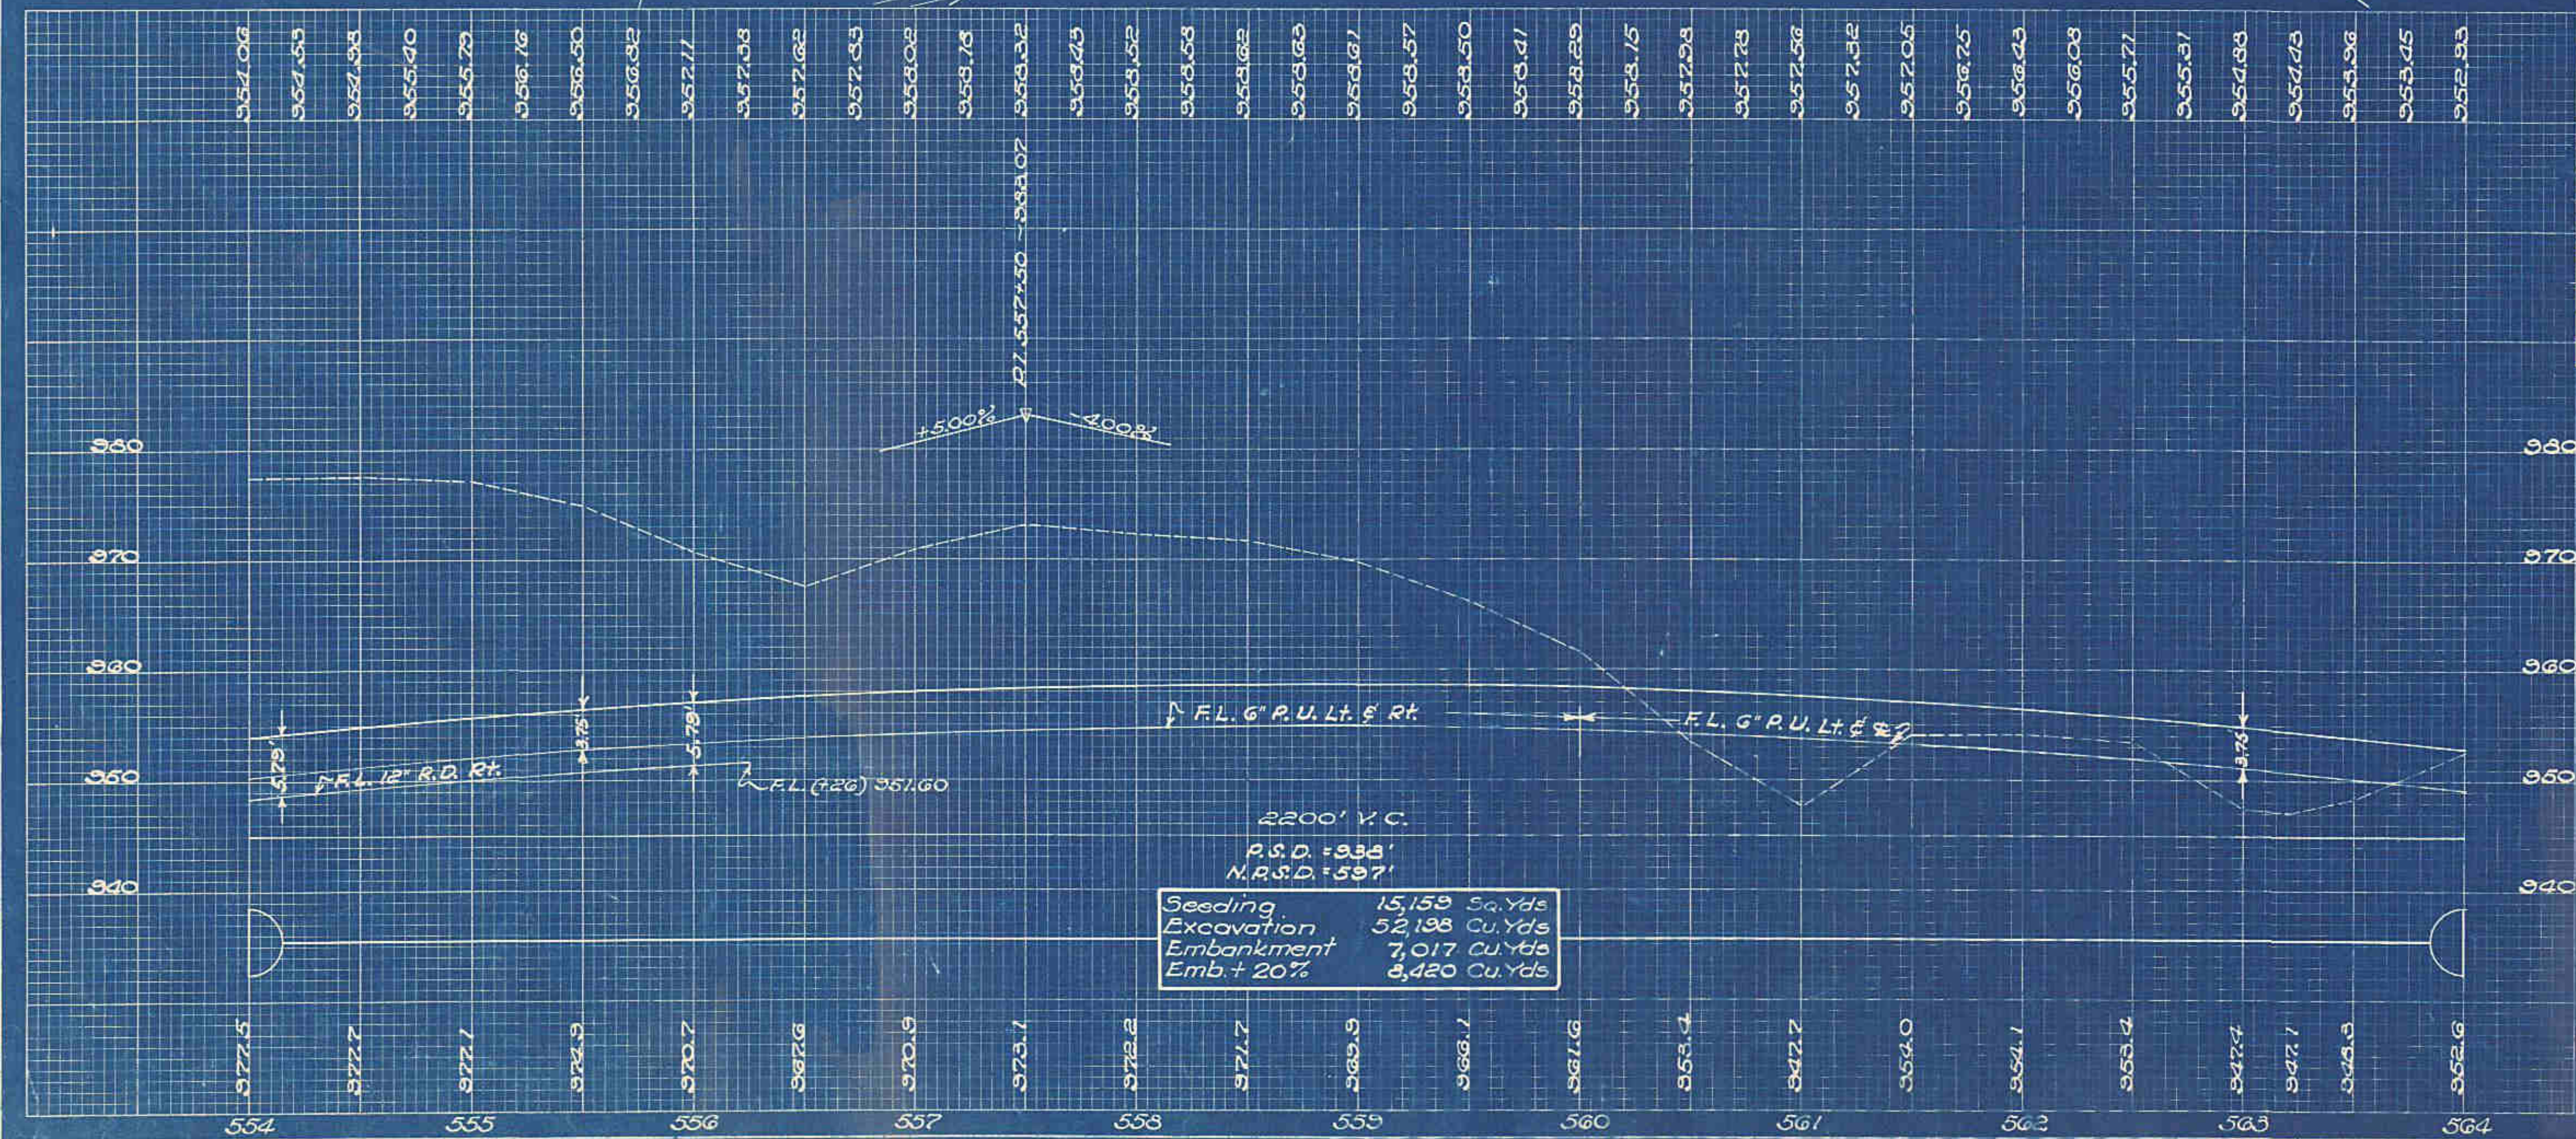

Seeding	15,159	Sq. Yds.
Excavation	52,198	Cu. Yds.
Embankment	7,017	Cu. Yds.
Emb. + 20%	8,420	Cu. Yds.