


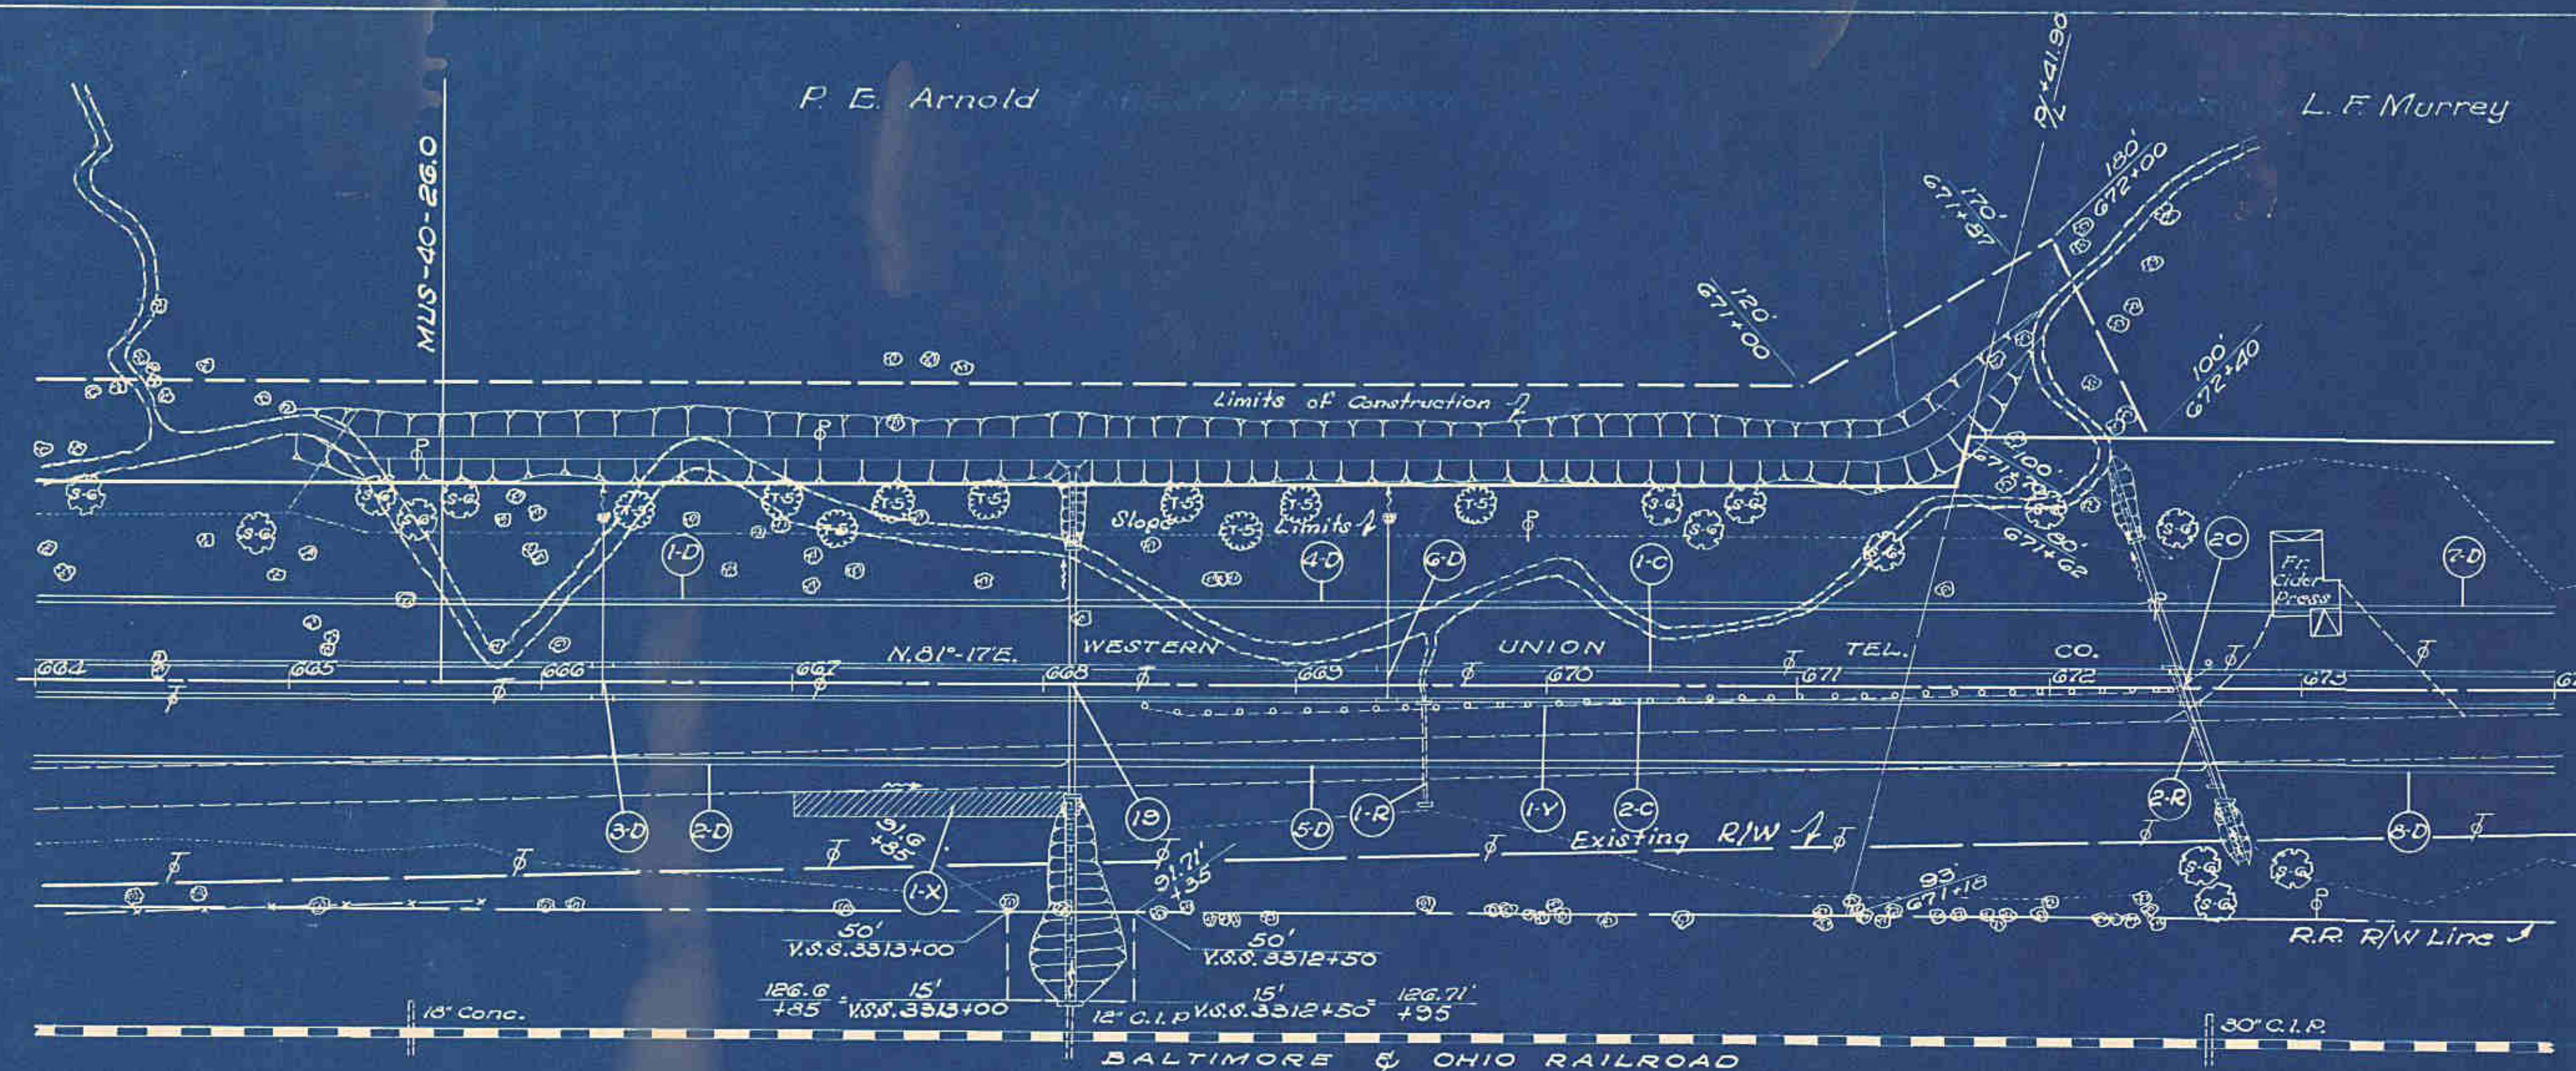

PAYEMENT REMOVAL		
Station	Rem. & Disp. of Exist. Bit. Surface Brick	
From To	incl. rolled stone Base	Sq. Yds.
664+00 674+00		1667
Total		1667

CURB REMOVAL		
Station	Side	Conc. Curb Removed
From To		Lin. Ft.
664+00 674+00		2000
Total		2000

GUARD RAIL REMOVAL (Y)			
Item No.	Station	Side	Removal Lin. Ft.
From To			
1-Y	668+39.8 672+39.5	Rt.	424.1
Total			424.1

CURB & GUTTER (C)				
Item No.	Station	Side	Type & Comb.	Curbs & Gutter Lin. Ft.
From To				
1-C	664+00 674+00	Lt.		1000
2-C	664+00 674+00	Rt.		1000
Totals				2000


REMOVALS (R)			
Item No.	Station	Side	Structures 20' Span & Under
From To			
1-R	668+50 Rt.		15' x 42' V.S.R. (enc.)
2-R	672+54.11		12' x 52.25' V.S.R. (enc.)
Total			2

SODDING (X)				
Item No.	Station	Side	Location	Sodding Sq. Yds.
From To				
1-X	667+00 668+13	Rt.	Standard	113
Total				113

STRUCTURES 20' SPAN & UNDER					
Struc. No.	Station	Present	Proposed	Details	
Type	Size	Length	Type	Size	Length on Sheet
19	668+11.5		Pipe	24"	102'
20	672+54.11	12' x 52.25'	Pipe	24"	110'

DRAINAGE (D)						
Item No.	Station	Side	Size	Length	Details	
From To						
1-D	664+00 668+10	Lt.				
2-D	664+00 668+10	Rt.				
3-D	668+25		2	34	28	2
4-D	668+13	Lt.				
5-D	668+13	Rt.				
6-D	668+32.5		2	34	30	2
7-D	672+45	Lt.				
8-D	672+67	Rt.				
Totals			4	68	58	4

B.M. x Top S.W. Cor. S. Headwall Sta. 669+48 El. 867.64

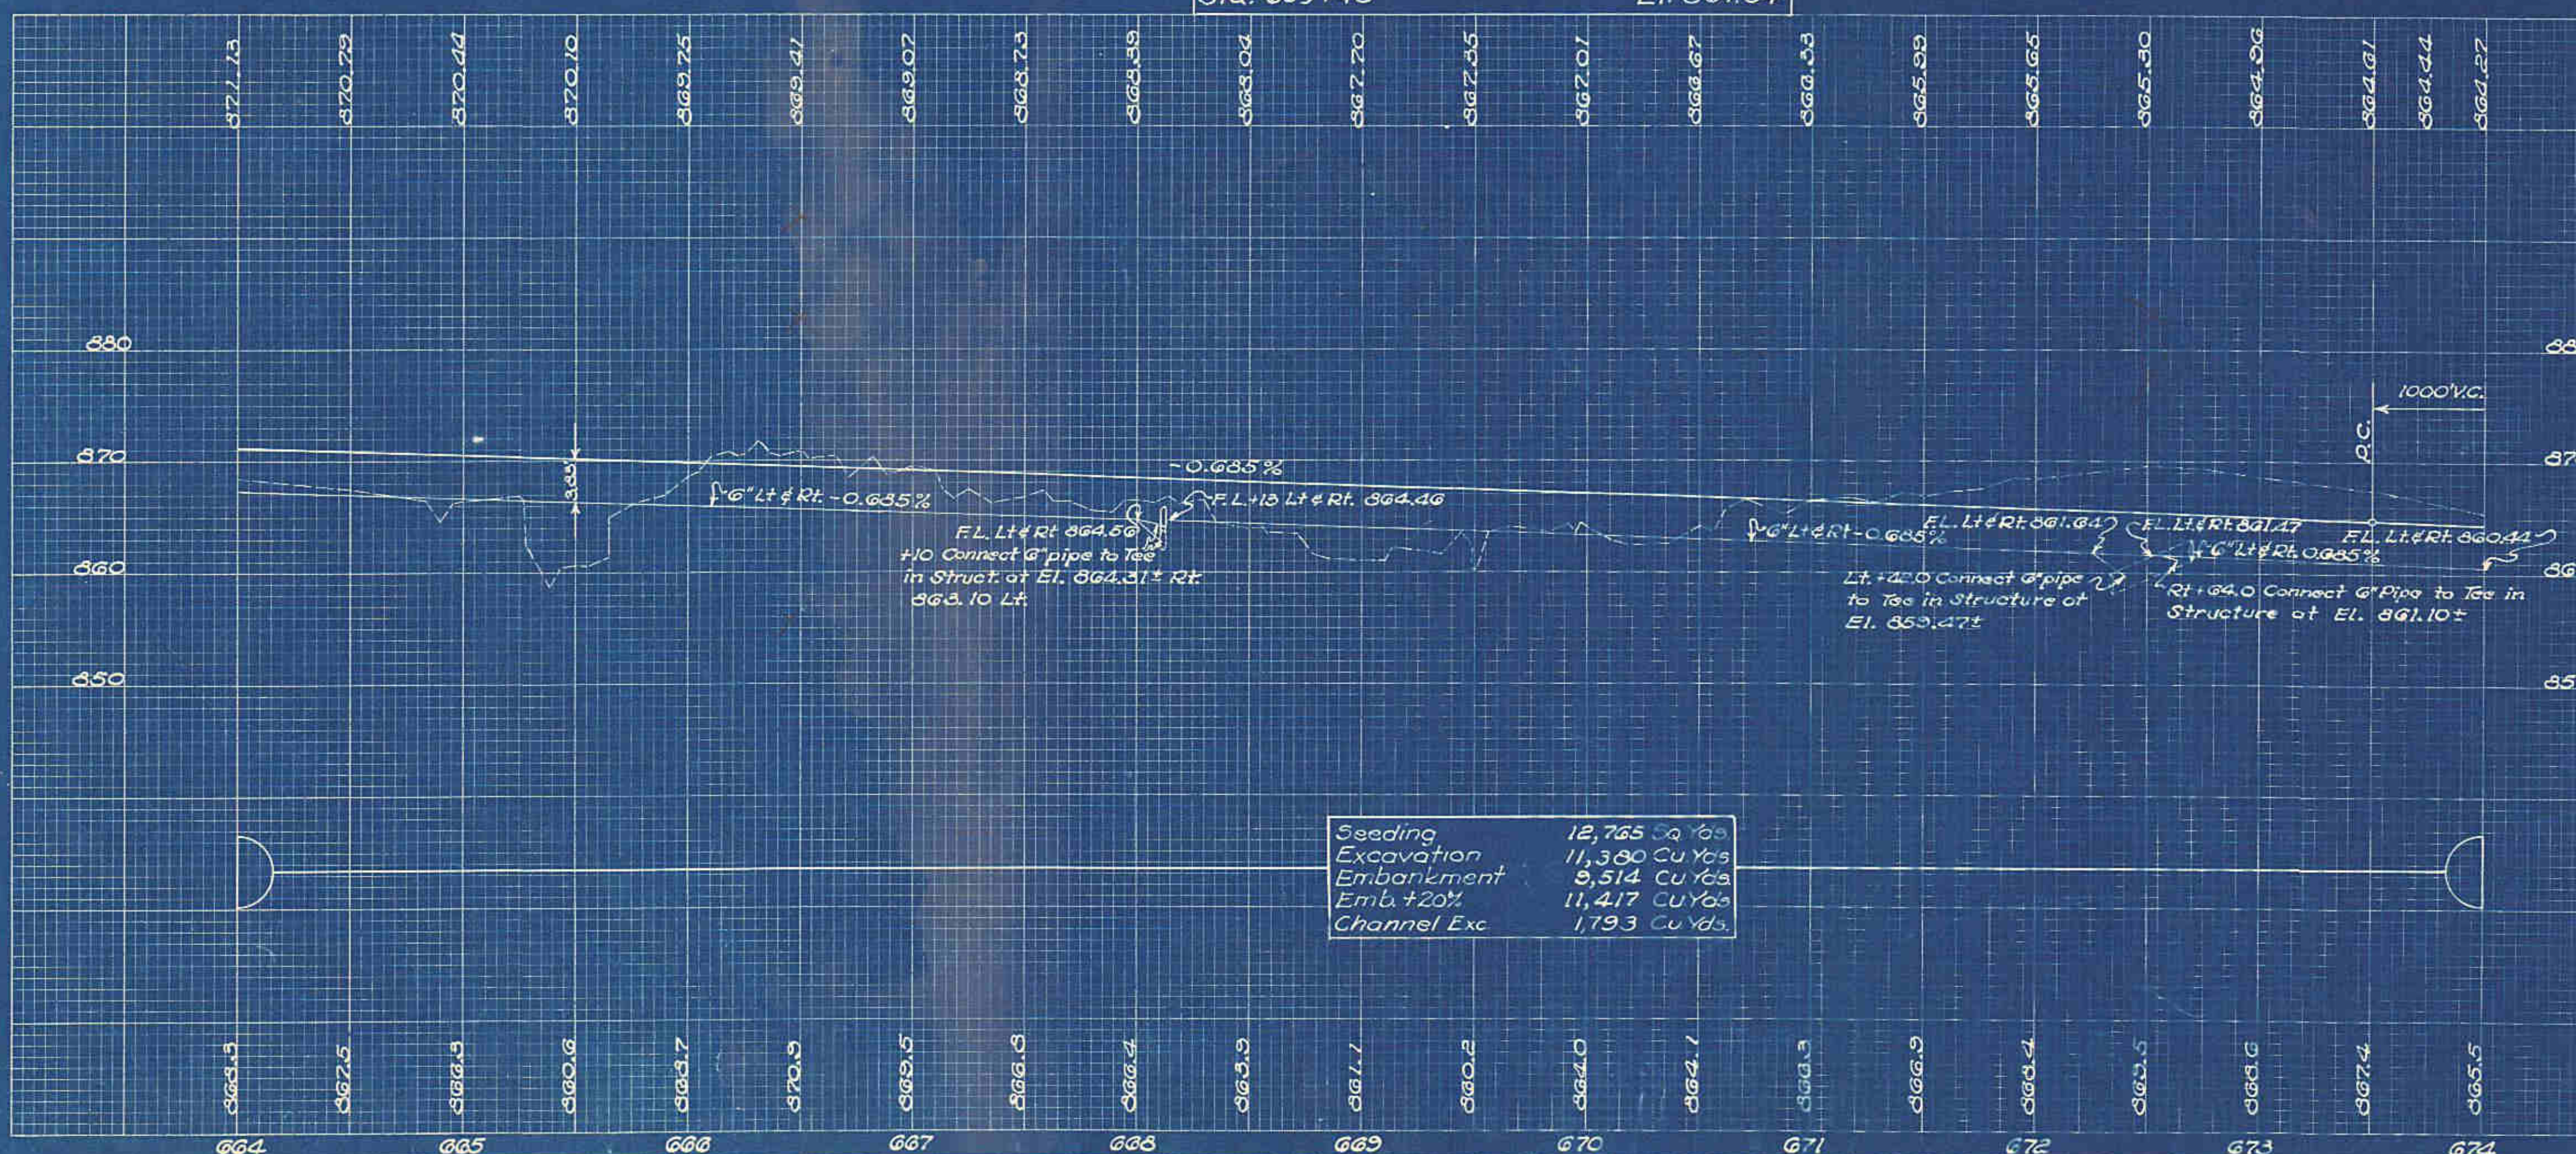

Seeding	12,765 Sq. Yds.
Excavation	11,380 Cu Yds.
Embankment	9,514 Cu Yds.
Emb. #20%	11,417 Cu Yds.
Channel Exc.	1,793 Cu Yds.

ITEM L-13 PLANTING SHRUBS				
Key	Scientific Name	Common Name	Size	Quantity
13	Salix elegans (Incans)	Rosemary Willow	4-5 Feet	14

ITEM L-14 PLANTING TREES				
Key	Scientific Name	Common Name	Size	Quantity
14	Salix elegantissima	Thornless Willow	1 1/2" Col. B&B 27 Ball	9