


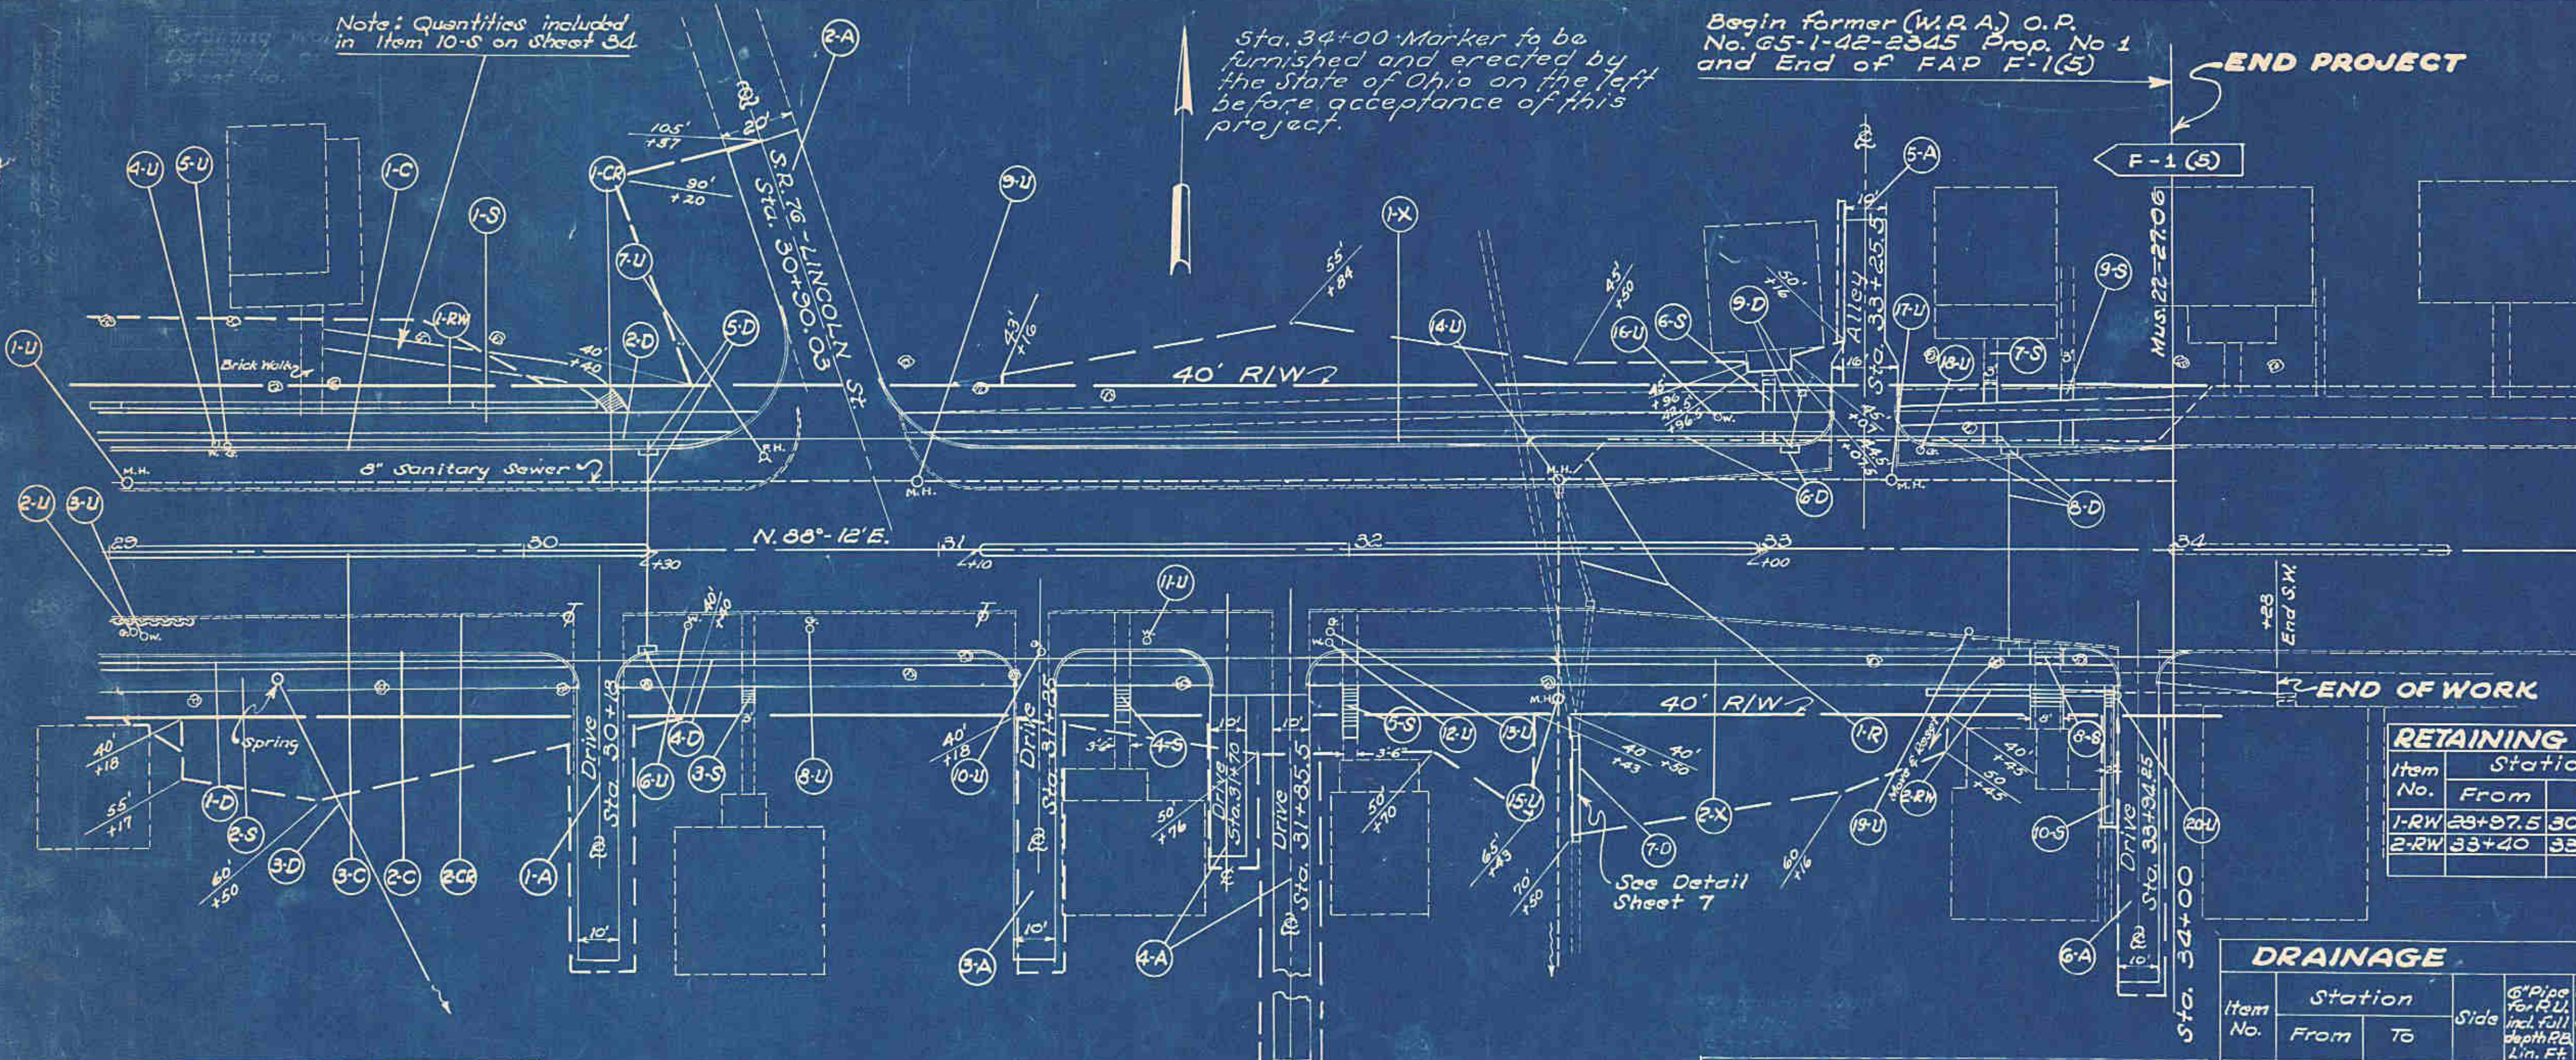

PAVEMENT REMOVAL

Station	Remove & Dispose of 3" Plain Concrete Pavement Sq. Yds.
From To	
29+00 34+00	1322.2
30+00.03	44.7
32+25.5	7.2
Total	1374.1

MUSKINGUM COUNTY
S. H. 1 SEC. T
& NEW CONCORD (Pt.)

RESET VALVES & RENEWED MANHOLES (U)

Item No.	Station	Side	Water Valves Reset No.	Gas Valves Reset No.	Fire Hydrants Reset No.	Manholes Reset No.	Manholes Renewed No.
1-U	29+04	Lt.					
2-U	29+05	Rt.					
3-U	29+07.5	Rt.					
4-U	29+24.5	Lt.					
5-U	29+27.5	Lt.					
6-U	30+39	Rt.					
7-U	30+57.5	Lt.					
8-U	30+69	Rt.					
9-U	30+95	Lt.					
10-U	31+25	Rt.					
11-U	31+51	Rt.					
12-U	31+95	Rt.					
13-U	31+95	Rt.					
14-U	32+51	Lt.					
15-U	32+51	Rt.					
16-U	32+90	Lt.					
17-U	33+22	Lt.					
18-U	33+39	Lt.					
19-U	33+51	Rt.					
20-U	33+87	Rt.					
Totals			7	7	1	5	5


RETAINING WALLS (RW)

Item No.	Station	Side	Detail on Sheet
1-RW	29+27.5 30+17.5	Lt.	160
2-RW	33+40 33+86.5	Rt.	161

DRAINAGE (D)

Item No.	Station	Side	6" Pipe for R.W. for Storm Drainage Lin. Ft.	8" Pipe for Storm Drainage Lin. Ft.	12" Pipe for S.S. under Storm Drainage Lin. Ft.	15" Pipe for Storm Drainage Lin. Ft.	CATCH BASINS	PIPE SPECIALS FOR STORM SEWER	Concrete Class E Curb & Gutter
	From To						Units	12" 6" 15" 15" 15"	
1-D	29+00 34+00	Rt.	500						
2-D	29+00 33+60	Lt.	460						
3-D	29+40	Rt.	80						
4-D	30+30 32+51	Rt.			221		1		
5-D	30+30	Lt.			48		1		
6-D	32+43 33+07	Lt.			64		1		
7-D	32+55	Rt.		26					
8-D	33+07 33+60	Lt.			53 48		2		
9-D	33+10	Lt.			13				
Totals			1040	26	351 96		5 1 2 2 1		1 1 1

Note: Pipe Specials necessary to connect Retaining Wall Drainage with above Drainage included in Retaining Wall Quantities.

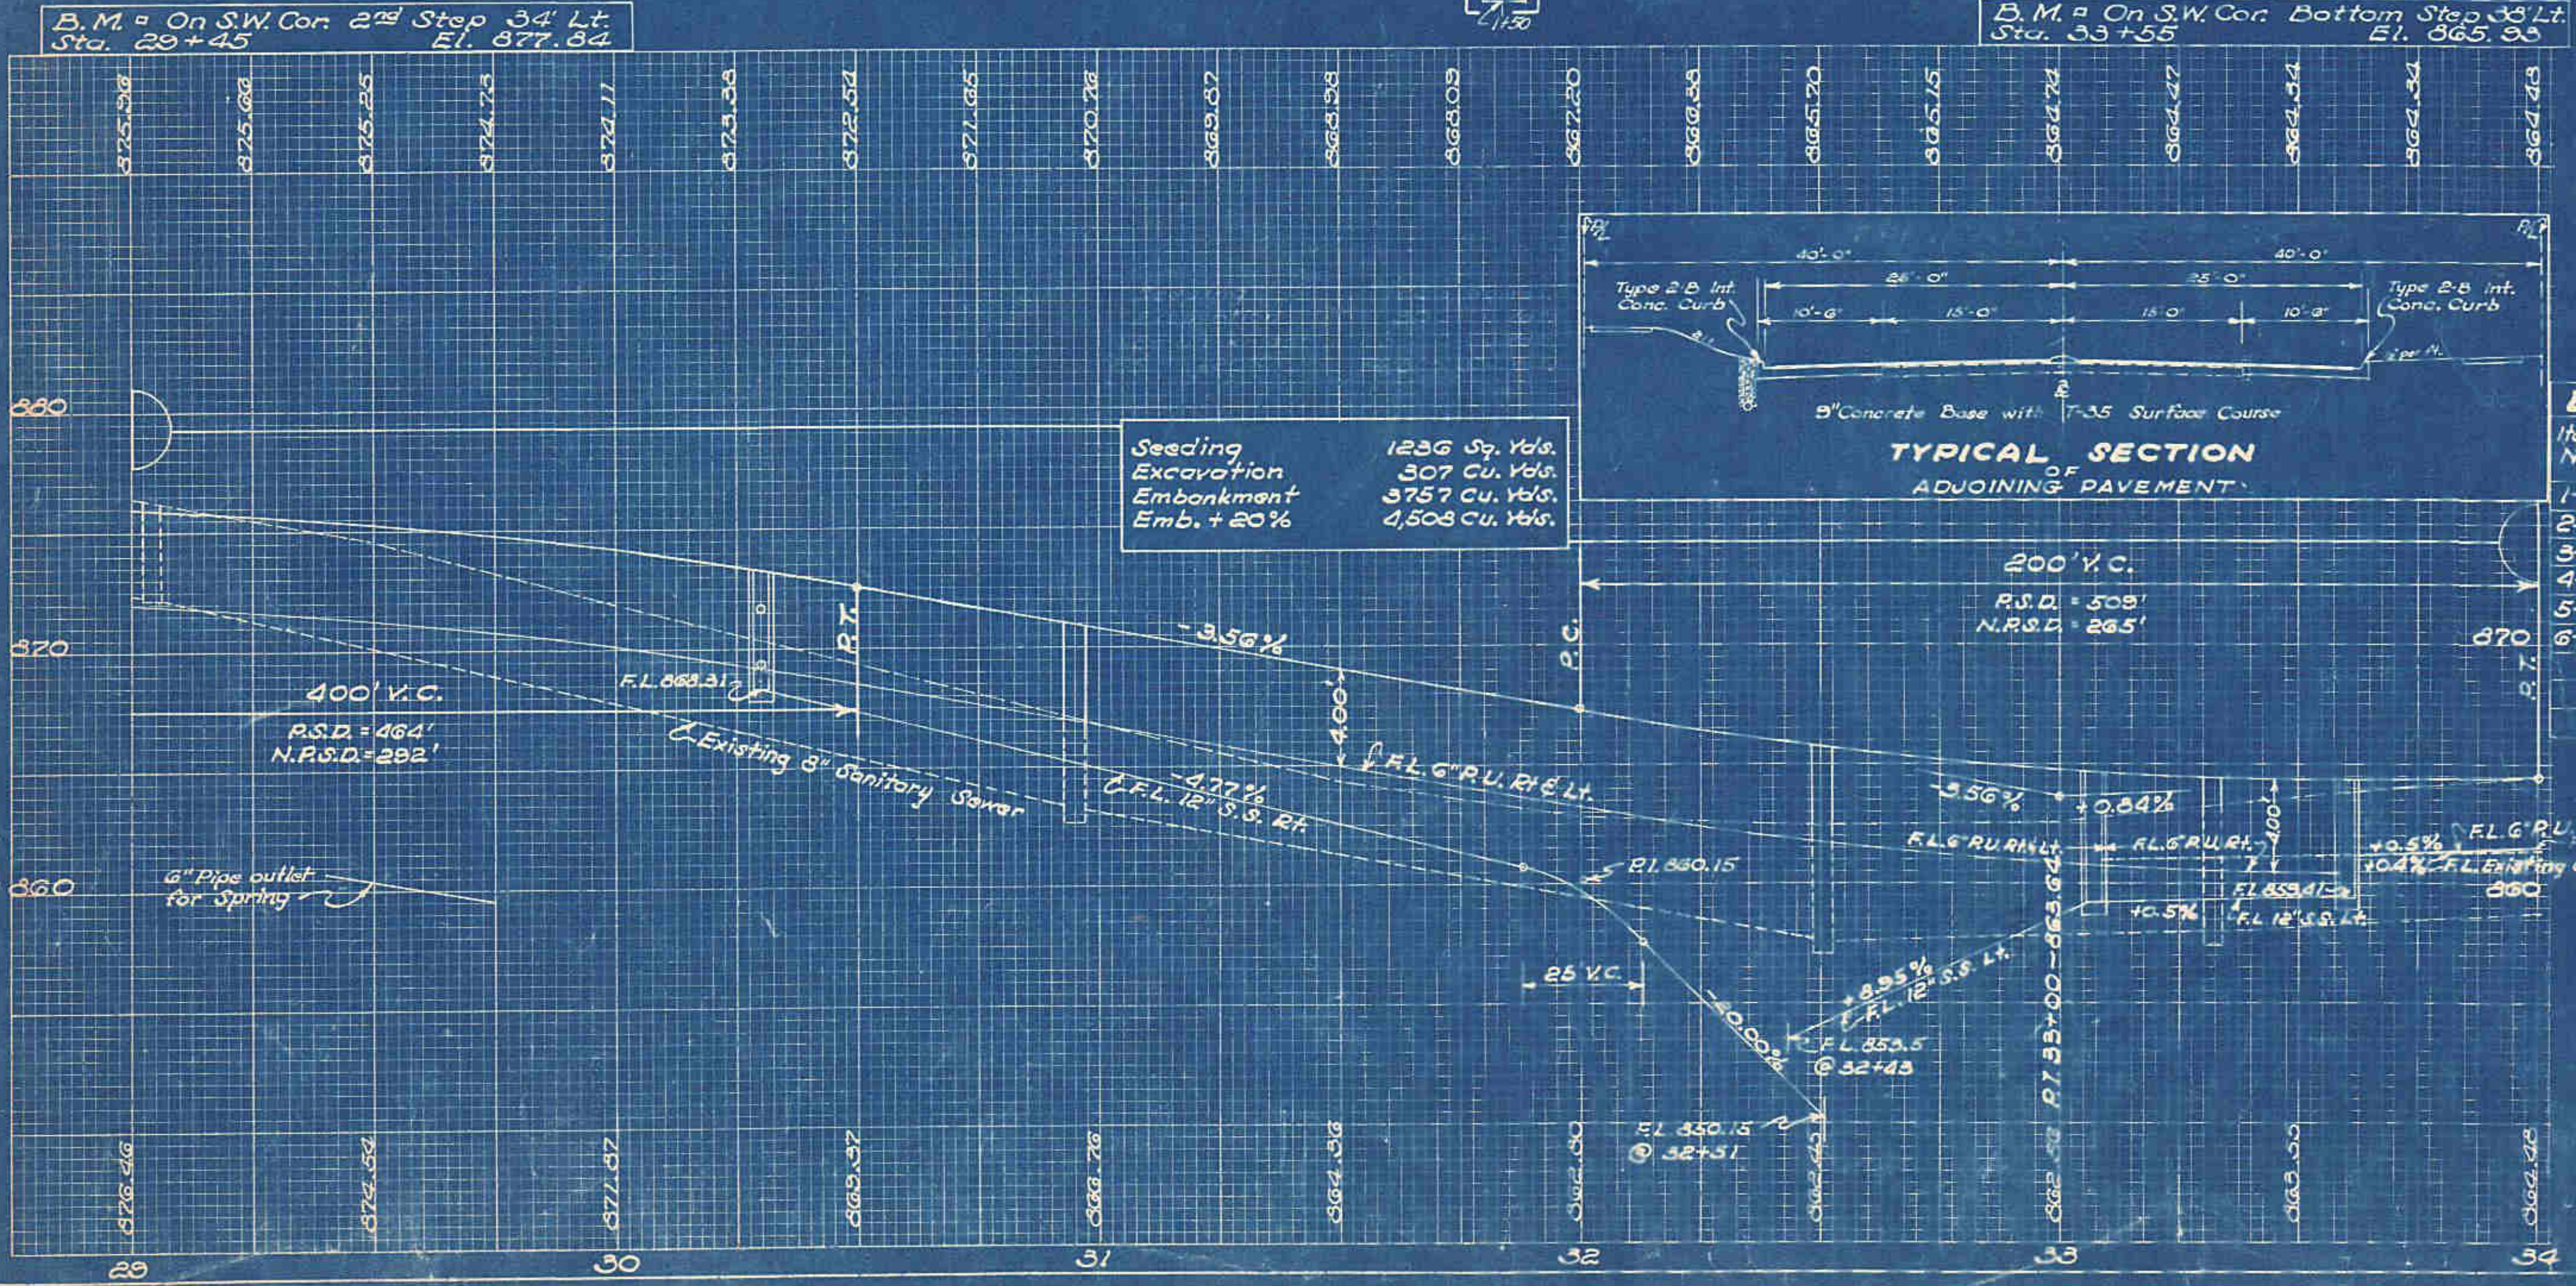

DRIVES & APPROACHES

Item No.	Station	Side	R.R.C. Pav't Sq. Yds.	Type 2-A Curb Mod. Lin. Ft.	Type 2-A Curb Lin. Ft.	I-17 Aggregate on Sheet	Detail on Sheet
1-A	30+18	Rt.	17.8	26.9		8	153
2-A	30+00.03	Lt.	22.1	79.3		8	154
3-A	31+25	Rt.	17.8	25.9		8	153
4-A	31+70	Rt.	37.1	25.9		19	155
5-A	33+25.5	Lt.	49.9	25.9		5	156
6-A	33+94.25	Rt.	17.8	25.9		9	156
Totals			905	255.0	129.0	79.3	49

SIDEWALK & STEPS (S)

Item No.	Station	Side	Sidewalk New Sq. Ft.	Steps New Lin. Ft.	Steps Remove Lin. Ft.	2" Pipe Railing Lin. Ft.
1-S	29+00 34+00	Lt.	2190.07	1460		
2-S	29+00 34+23	Rt.	2377.13	279		
3-S	30+54	Rt.	1200	126	12	3
4-S	31+44	Rt.	2100	79	21	3.5
5-S	32+01	Rt.	1400	102	35	
6-S	33+02	Lt.	3900			9
7-S	33+56	Lt.	2100			
8-S	33+70	Rt.	3200	81	40	13
9-S	33+75	Lt.	2100		3	
10-S	33+86	Rt.	3500	47	10	
Totals			2122.25	2176	121	38.5

CURB REMOVAL (CR)

Item No.	Station	Side	Conc. Curb Removal Lin. Ft.
1-CR	29+00 34+00	Lt.	522
2-CR	29+00 34+07.25	Rt.	455.25
Totals			977.25

SODDING (X)

Item No.	Station	Side	Location	Sodding Sq. Yds.
1-X	29+00 34+00	Lt.	Between	157
2-X	29+00 34+07.25	Rt.	Curb & Sidewalk	143
Total				305

REMOVAL (R)

Item No.	Station	Pipe Under 15" Lin. Ft.	Catch Basin Units	Brick Sewer 2'x2' Lin. Ft.
1-R	32+60	118	2	26
Total		118	2	26

CURB & MEDIAN STRIP (C)

Item No.	Station	Side	Type 2-B Median Strip Conc. Curb Lin. Ft.	Sq. Yds.
1-C	29+02.75 34+00	Lt.	391.25	
2-C	29+00 33+00	Rt.		29
3-C	29+00 33+81.25	Rt.	337.75	
Totals			729.00	29