

Situated in the State of Ohio, County of Muskingum, Township of Newton, Township 15, Range 14, part of the Northeast Quarter of Section 20, and bounded and described as follows:

Parcel One:

47-70-02-04-001 N/A

Commencing at a concrete monument found at the Southwest corner of the Northeast Quarter of Section 20; thence on West line of said quarter section North 5° 07' 10" East 2694.77 feet to an iron pin found; thence South 85° 08' 42" East 1020.84 feet to a R. R. spike in center of Huggins Road, the place of beginning; thence South 85° 08' 42" East, leaving Huggins Road, 1694.88 feet to an iron pin found at the Northeast corner of the Northeast Quarter of Section 20; thence South 4° 40' 58" West 665.96 feet to a stone found; thence North 84° 12' 31" West 442.75 feet to an iron pin set; thence South 59° 53' 37" West 507.75 feet to a point; thence South 53° 57' 24" West 316.13 feet to a point; thence South 44° 00' 10" West 89.77 feet to a point; thence South 48° 17' 45" West 428.18 feet to a point in center of Huggins Road, passing an iron pin set at 416.18 feet; thence along the center of Huggins Road the following fifteen (15) courses and distances, North 15° 26' 51" West 237.25 feet to a point, North 33° 11' 57" West 25.80 feet to a point, North 31° 36' 55" West 70.85 feet to a point, North 38° 53' 37" West 125.38 feet to a point, North 26° 26' 00" West 41.72 feet to a point, North 11° 49' 03" East 32.21 feet to a point, North 20° 47' 22" East 32.21 feet to a point, North 22° 42' 38" East 199.51 feet to a point, North 26° 20' 03" East 106.52 feet to a point, North 24° 07' 25" East 46.71 feet to a point, North 14° 14' 39" East 34.75 feet to a point, North 5° 58' 18" East 20.55 feet to a point, North 1° 16' 26" West 46.47 feet to a point, North 12° 08' 51" West 97.38 feet to a point and North 6° 04' 40" West 529.57 feet to the place of beginning, containing 36.65 acres more or less.

Parcel Two:

47-70-02-04-PS

Commencing at a concrete Monument found at the Southwest corner of the Northeast Quarter of Section 20; thence along the West line of the Northeast Quarter of Section 20 North 5° 07' 10" East 298.62 feet to an iron pin set, the place of beginning; thence North 5° 07' 10" East along the West line of said quarter section 2396.15 feet to an iron pin found, from which an iron pin set bears South 66° 35' 59" East 42.08 feet; thence along the North line of said section South 85° 08' 42" East 1020.84 feet to a R. R. spike set in the center of Huggins Road, passing an iron pin set at 1000.84 feet; thence along the center of Huggins Road the following twenty-one (21) courses and distances:

South $6^{\circ} 04' 40''$ East 529.57 feet to a point, South $12^{\circ} 08' 51''$ East 97.38 feet to a point, South $1^{\circ} 16' 26''$ East 46.47 feet to a point, South $5^{\circ} 58' 18''$ West 20.55 feet to a point, South $14^{\circ} 14' 39''$ West 34.75 feet to a point, South $24^{\circ} 07' 25''$ West 46.71 feet to a point, South $26^{\circ} 20' 03''$ West 106.52 feet to a point, South $22^{\circ} 42' 38''$ West 199.51 feet to a point, South $20^{\circ} 47' 22''$ West 32.21 feet to a point, South $11^{\circ} 49' 03''$ West 32.21 feet to a point, South $26^{\circ} 26' 00''$ East 41.72 feet to a point, South $38^{\circ} 53' 37''$ East 125.38 feet to a point, South $31^{\circ} 36' 55''$ East 70.85 feet to a point, South $33^{\circ} 11' 57''$ East 25.80 feet to a point, South $15^{\circ} 26' 51''$ East 237.25 feet to a point, South $24^{\circ} 14' 59''$ East 77.18 feet to a point, South $12^{\circ} 05' 07''$ East 31.54 feet to a point, South $10^{\circ} 47' 05''$ West 23.32 feet to a point, South $14^{\circ} 06' 51''$ West 343.32 feet to a point, South $7^{\circ} 00' 31''$ West 76.69 feet to a point and South $2^{\circ} 18' 26''$ West 310.74 feet to a point; thence leaving Huggins Road North $85^{\circ} 41' 50''$ West 1280.14 feet to an iron pin set, passing an iron pin set at 16.00 feet, containing 64.48 acres more or less.

Bearings are based on the West line of the Northeast Quarter of Section 20 bearing North $5^{\circ} 07' 10''$ East.

Being all of Auditor's Parcel Number 47-47-70-20-04-000.

Iron pin set are No. 5 reinforcing bars 30 inches long with plastic I. D. caps.

Deed Reference: Volume 738, Page 236.


Survey & Description By:

**OFFICE COPY
NOT RECORDABLE**
R. L. Daniels
Registered Surveyor No. 1410

DESCRIPTION APPROVED
FOR AUDITOR'S TRANSFER

BY A. L. Lill

2-12-93

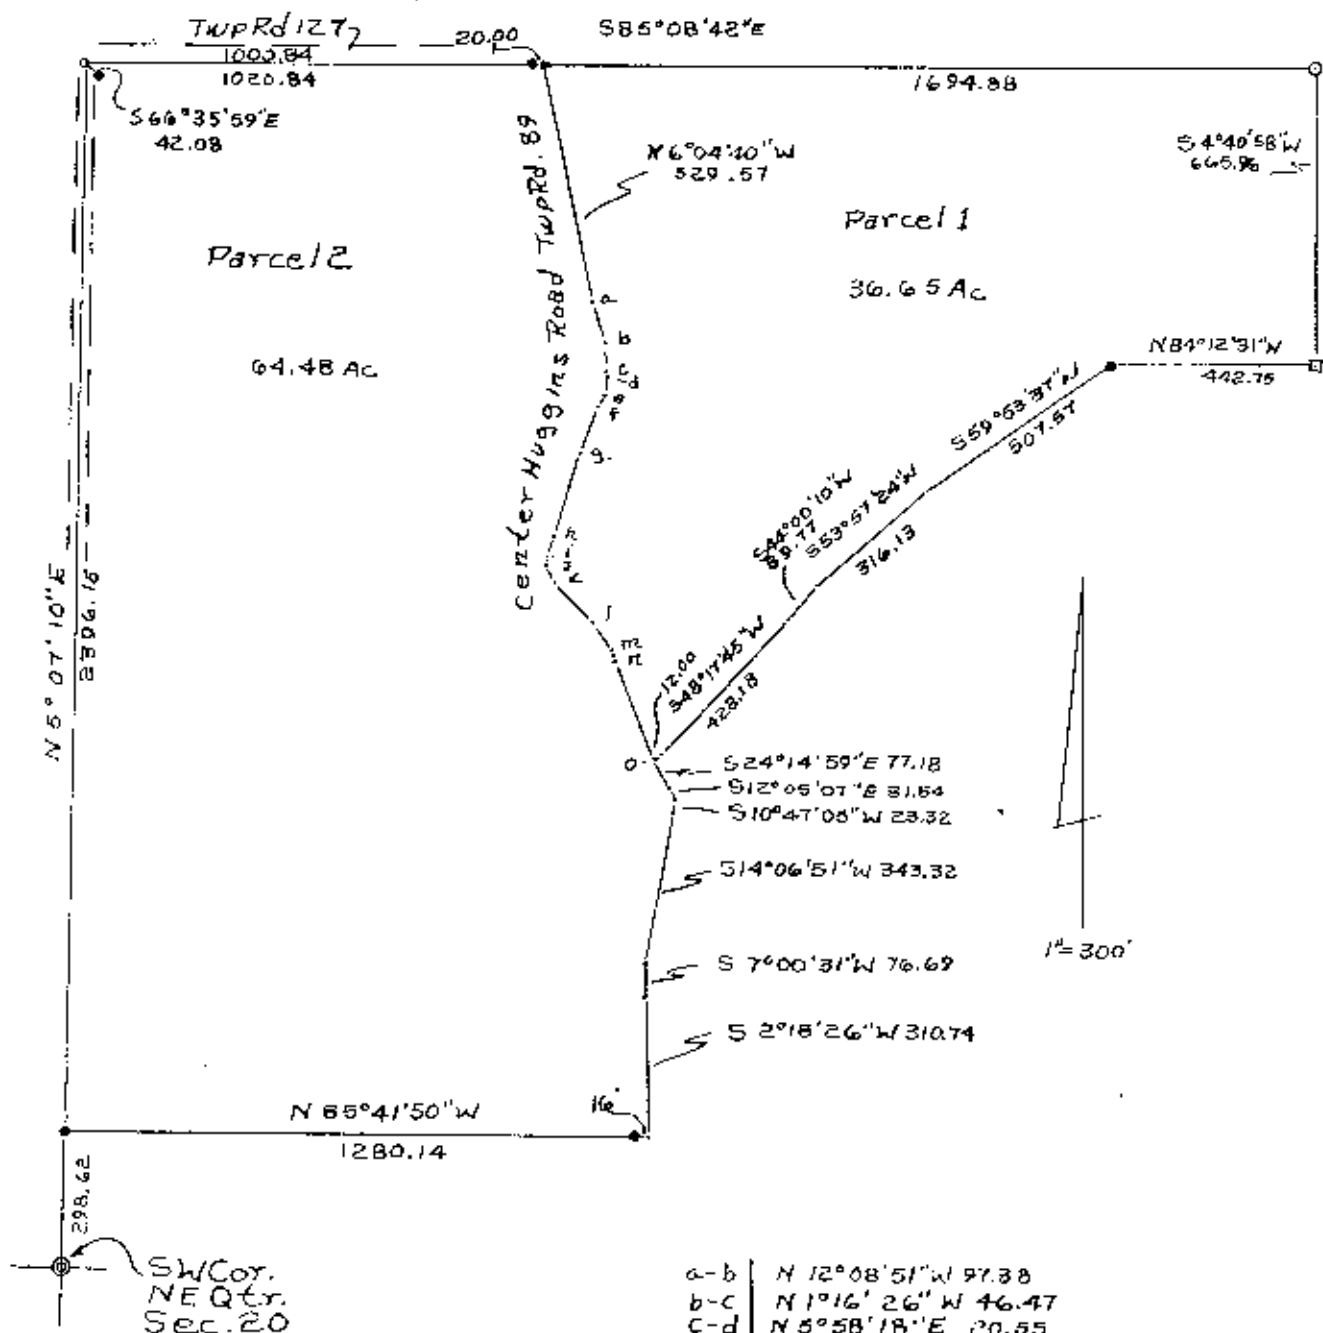

© Monument Found
 o Iron Pins Found
 - R.R. Spike Set
 • Iron Pins Set No. 5 Reinf. Bars
 30" Lg Plastic I.D. Caps

a-b N 12°08'51"W 97.38
 b-c N 1°16'26"W 46.47
 c-d N 5°58'18"E 20.55
 d-e N 14°14'39"E 34.75
 e-f N 24°07'25"E 46.71
 f-g N 26°20'03"E 106.52
 g-h N 22°42'38"E 179.51
 h-i N 20°47'22"E 32.21
 i-j N 11°49'03"E 32.21
 j-k N 26°06'00"W 41.72
 k-l N 38°53'37"W 125.38
 l-m N 31°36'55"W 70.85
 m-n N 33°11'57"W 25.80
 n-o N 15°26'51"W 237.25

DESCRIPTION APPROVED
 FOR AUDITOR'S TRANSFER

BY A. J. Llo
 2-12-93

Gerald Moore Etal
 Public Rec. Surveyor
 No. 1000
 Parcel No. 41-47-70-20-04-000
 New York
 T15, R14, Part NE. Qtr.
 Section 20

OFFICE COPY
 NOT RECORDABLE