

Gerald Moore et al
2/11/93

Situated in the State of Ohio, County of Muskingum, Township of Newton, Township 15, Range 14, part of the Northeast Quarter of Section 20, and bounded and described as follows:

Parcel One:


47-70-02-04-001 N/A

Commencing at a concrete monument found at the Southwest corner of the Northeast Quarter of Section 20; thence on West line of said quarter section North $5^{\circ} 07' 10''$ East 2694.77 feet to an iron pin found; thence South $85^{\circ} 08' 42''$ East 1020.84 feet to a R. R. spike in center of Huggins Road, the place of beginning; thence South $85^{\circ} 08' 42''$ East, leaving Huggins Road, 1694.88 feet to an iron pin found at the Northeast corner of the Northeast Quarter of Section 20; thence South $4^{\circ} 40' 58''$ West 665.96 feet to a stone found; thence North $84^{\circ} 12' 31''$ West 442.75 feet to an iron pin set; thence South $59^{\circ} 53' 37''$ West 507.75 feet to a point; thence South $53^{\circ} 57' 24''$ West 316.13 feet to a point; thence South $44^{\circ} 00' 10''$ West 89.77 feet to a point; thence South $48^{\circ} 17' 45''$ West 428.18 feet to a point in center of Huggins Road, passing an iron pin set at 416.18 feet; thence along the center of Huggins Road the following fifteen (15) courses and distances, North $15^{\circ} 26' 51''$ West 237.25 feet to a point, North $33^{\circ} 11' 57''$ West 25.80 feet to a point, North $31^{\circ} 36' 55''$ West 70.85 feet to a point, North $38^{\circ} 53' 37''$ West 125.38 feet to a point, North $26^{\circ} 26' 00''$ West 41.72 feet to a point, North $11^{\circ} 49' 03''$ East 32.21 feet to a point, North $20^{\circ} 47' 22''$ East 32.21 feet to a point, North $22^{\circ} 42' 38''$ East 199.51 feet to a point, North $26^{\circ} 20' 03''$ East 106.52 feet to a point, North $24^{\circ} 07' 25''$ East 46.71 feet to a point, North $14^{\circ} 14' 39''$ East 34.75 feet to a point, North $5^{\circ} 58' 18''$ East 20.55 feet to a point, North $1^{\circ} 16' 26''$ West 46.47 feet to a point, North $12^{\circ} 08' 51''$ West 97.38 feet to a point and North $6^{\circ} 04' 40''$ West 529.57 feet to the place of beginning, containing 36.65 acres more or less.

Parcel Two:

47-70-02-04-PS

Commencing at a concrete Monument found at the Southwest corner of the Northeast Quarter of Section 20; thence along the West line of the Northeast Quarter of Section 20 North $5^{\circ} 07' 10''$ East 298.62 feet to an iron pin set, the place of beginning; thence North $5^{\circ} 07' 10''$ East along the West line of said quarter section 2396.15 feet to an iron pin found, from which an iron pin set bears South $66^{\circ} 35' 59''$ East 42.08 feet; thence along the North line of said section South $85^{\circ} 08' 42''$ East 1020.84 feet to a R. R. spike set in the center of Huggins Road, passing an iron pin set at 1000.84 feet; thence along the center of Huggins Road the following twenty-one (21) courses and distances:

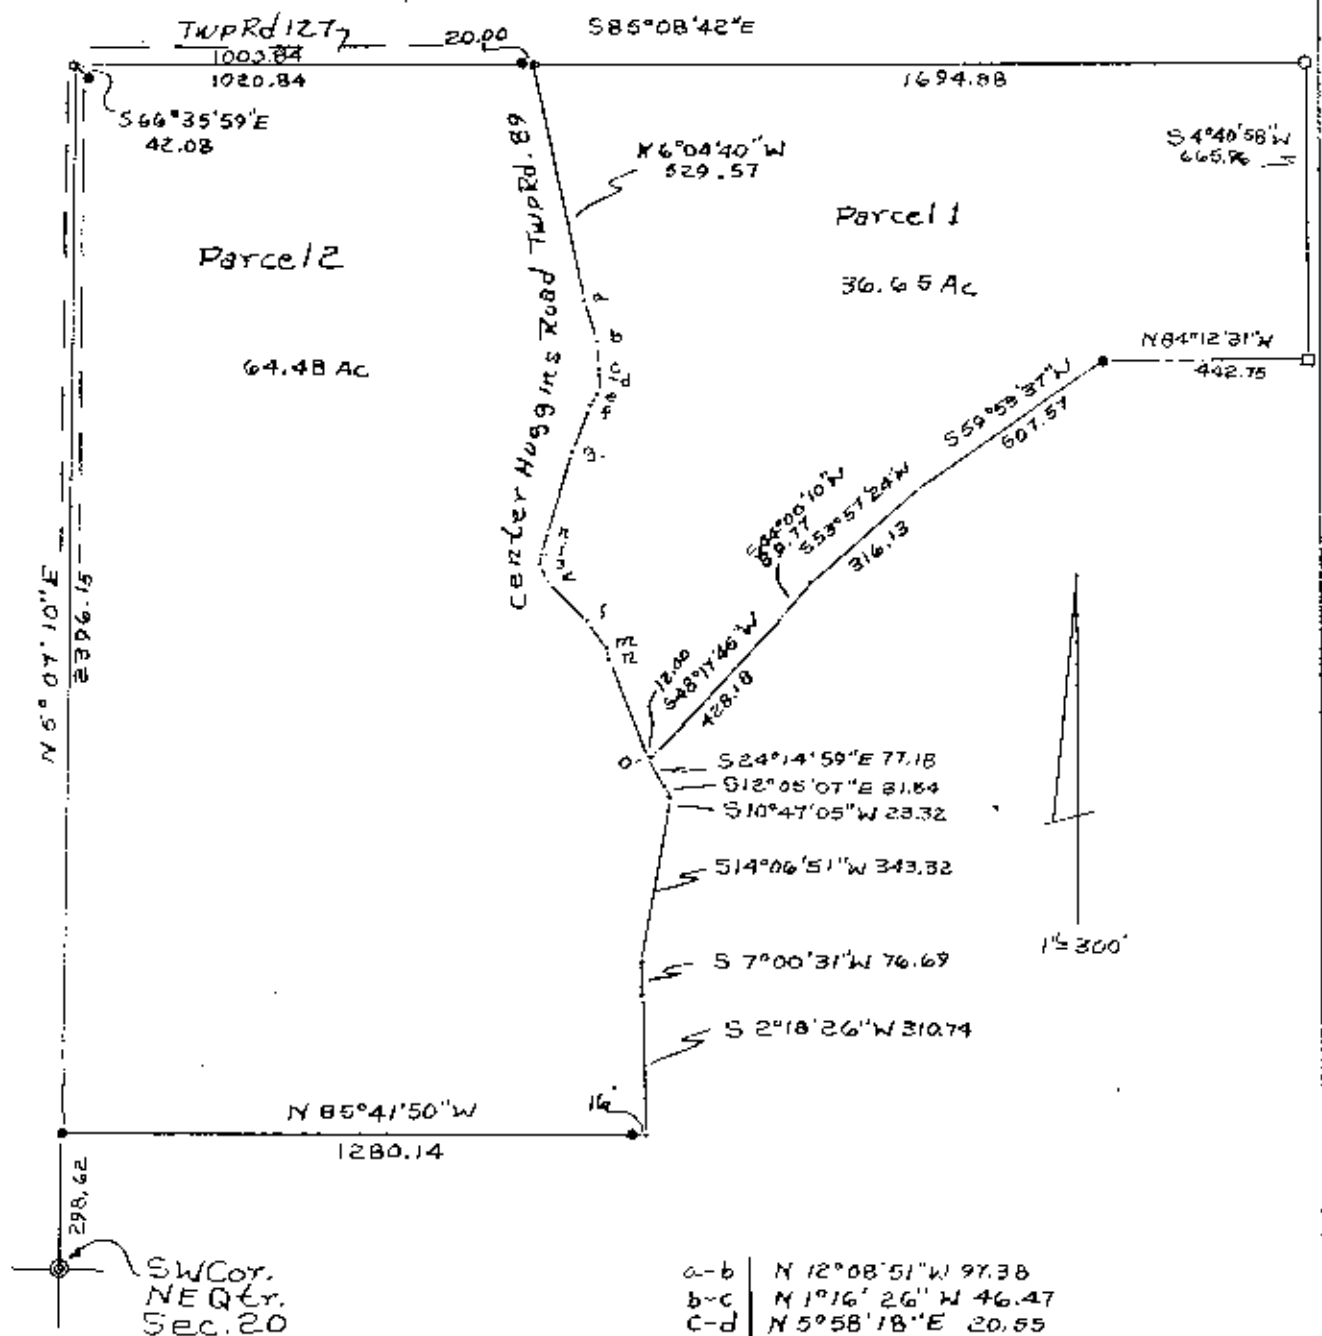

© Monument Found
 o Iron Pins Found
 - R.R. Spike Set
 • Iron Pins Set No. 5 Remf. Bars
 30" Lg Plastic I.D. caps

a-b	N 12° 08' 51" W 97.38
b-c	N 1° 16' 26" W 46.47
c-d	N 5° 58' 18" E 20.55
d-e	N 14° 14' 39" E 34.75
e-f	N 24° 07' 25" E 46.71
f-g	N 26° 20' 03" E 106.52
g-h	N 22° 42' 38" E 179.51
h-i	N 20° 47' 22" E 32.21
i-j	N 11° 49' 03" E 32.21
j-k	N 26° 26' 00" W 41.72
k-l	N 38° 53' 37" W 125.33
l-m	N 31° 56' 55" W 70.85
m-n	N 33° 11' 57" W 25.80
n-o	N 15° 26' 51" W 237.25

DESCRIPTION APPROVED
 FOR AUDITOR'S TRANSFER

BY A. L. 226
 2-12-93

Gerald Moore Etal
 Public Reg. Surveyor
 No. 61-220
 Parcel No. 47-47-70-20-04-000
 Newton, Iowa
 T15, R14, Part N.E. Qtr.
 Section 20

**OFFICE COPY
 NOT RECORDABLE**