

LINE TABLE

LINE	BEARING	DISTANCE
L1	S 03°34'37" E	57.85'
L2	S 83°38'00" E	92.21'
L3	S 32°41'34" E	48.40'
L4	S 22°41'21" W	38.64'
L5	N 75°26'35" W	103.46'
L6	S 19°45'08" W	75.86'
L7	N 16°14'27" E	103.87'
L8	S 75°26'35" E	159.44'
L9	N 29°27'18" E	25.48'
L10	N 87°22'22" E	50.01'

SE CRNR, SEC. 14
CALC'D BY BASELINE SURVEY
JOB 5638, 04/26/2013

SITUATED IN

The State of Ohio, County of Muskingum,
Township of Perry, Quarter Twp. 3, T1, R6,
United States Military Lands.

BASIS OF BEARING

Bearings & distances are based on State Plane
Grid Coordinates, NAD83, Ohio South, per GPS
Observation.


REFERENCES

* As Noted on Plat
www.muskingumcountyauditor.org
www.mceo.org
<http://recorder.muskingumcounty.org>


LEGEND

- Iron Pin Found
- Pipe Found w/cap
- ⊠ Stone Found
- Z- Property Hook
- ⊙ Iron Pin Set
- Point Not Marked

Graphic Scale



(IN FEET)
1 inch = 100 ft.

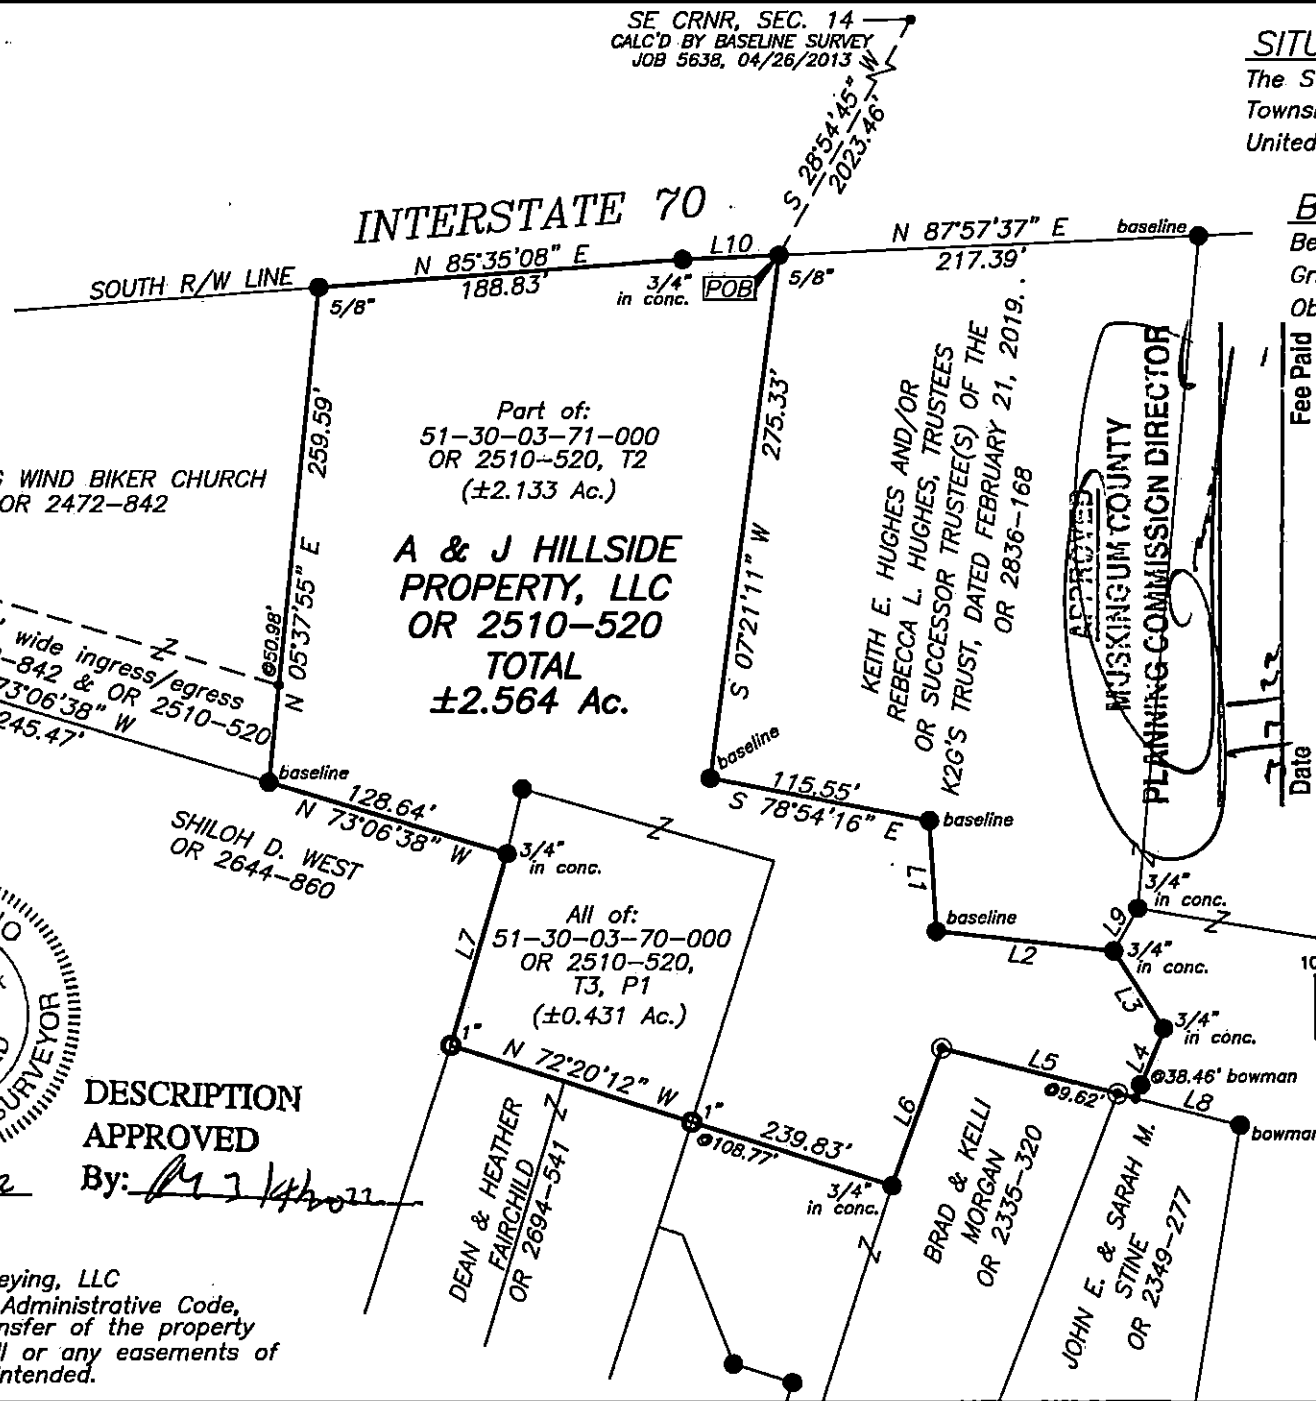

**OFFICE COPY
NOT RECORDABLE**

Brian Kelly McPeck
Reg. Surveyor No. 8517

DESCRIPTION
APPROVED

By: *[Signature]*
Date: 3/14/2022

This plat was prepared by McPeck Land Surveying, LLC
in accordance with Chapter 4733-37 of the Administrative Code,
and is intended to be used for the legal transfer of the property
described and does not intend to describe all or any easements of
record, nor encroachments unless otherwise intended.



**MCPECK
LAND
SURVEYING, LLC**
www.mcpecklandsurveying.com
email: brian@mcpecklandsurveying.com
340 Robin Hood Ln., Zanesville, Oh 43701 • 740.704.6073