

SITUATED IN:

State of Ohio, County of Muskingum, Township of Hopewell
being part of the Southeast Quarter of Section 7, Township 1,
Range 9, United States Military Lands

BASIS OF BEARINGS

Bearings are based on the Ohio State Plane Coordinate System,
NAD 83(2011), South Zone, Grid North, as per GPS observations

PARCEL NO.

Part of: 25-16-07-21-000 ±8.02 Acres
(±0.36 Ac. in R/W of Twp. Rd. 122)

N.E. Cor., S. E.
Qtr., Sec. 7
T-1 R-9, U.S.M.L.

CURVE	RADIUS	ARC LENGTH	CHORD LENGTH	CHORD BEARING	DELTA ANGLE
C1	402.01'	177.17'	175.74'	N 50°27'54" E	25°15'03"
C2	461.60	63.36'	63.31'	N 41°52'35" E	7°51'51"

LINE	BEARING	DISTANCE
L1	S 66°04'45" W	45.74'
L2	S 72°08'17" W	66.13'
L3	S 63°54'40" W	90.21'
L4	S 73°46'28" W	121.26'
L5	S 50°31'58" W	71.23'
L6	S 57°17'41" W	148.29'
L7	N 65°11'51" E	145.53'
L8	N 64°31'14" E	116.14'
L9	N 63°35'17" E	76.16'

C/L Macedonia Road
(Twp Rd. 122) R/W 40'

Robert H. Miller III
OR 3004-805

Robert H. Miller III
OR 3004-805
Part of Tract I
±8.02 Acres

John Brown Jr.
OR 2921-321

David, M. and Marci
Worstell
OR 1941-498

P.O.B.

I.P.F. N88-05-52E, 0.44'
Axle Fd. S84-42-02E, 1.45'

Iron pin fd.
perp. to line
1.46' east

APPROVED
MUSKINGUM COUNTY
PLANNING COMMISSION DIRECTOR

LEGEND

- Iron Pin Set 5/8" rebar
- Iron Pin Found 5/8" rebar Date
- ⊕ Stone Found with PK Nail in Center
- Axle Found
- Iron Pipe Found
- ⊗ Post Found


REFERENCES

Survey by Roger W. Claus PS#6456
Survey by Jack D. Newcome PS #7321,
All deed Ref. shown on this plat

DESCRIPTION

APPROVED

By: 10/11/18/2021

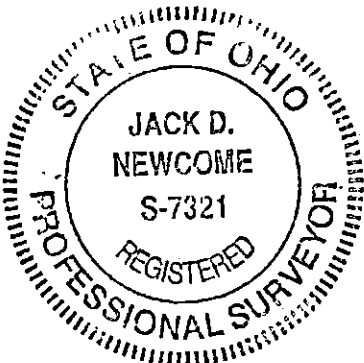

OFFICE COPY

NOT RECORDABLE

Reg. Surveyor No. 7321

10" fence post fd.
S.E. Cor. S.E. Qtr.



Newcome Surveying Company
6515 Ballard Road
Nashport, Ohio 43830
740-452-5796