


SITUATED IN

The State of Ohio, County of Muskingum
Township of Jackson, and being a part
of NE Qtr., Sec. 17, T3, R9.

VACATION PLAT

BASIS OF BEARING

Bearings are based on State Plane Grid Coordinates,
NAD83, Ohio South, per GPS Observation.

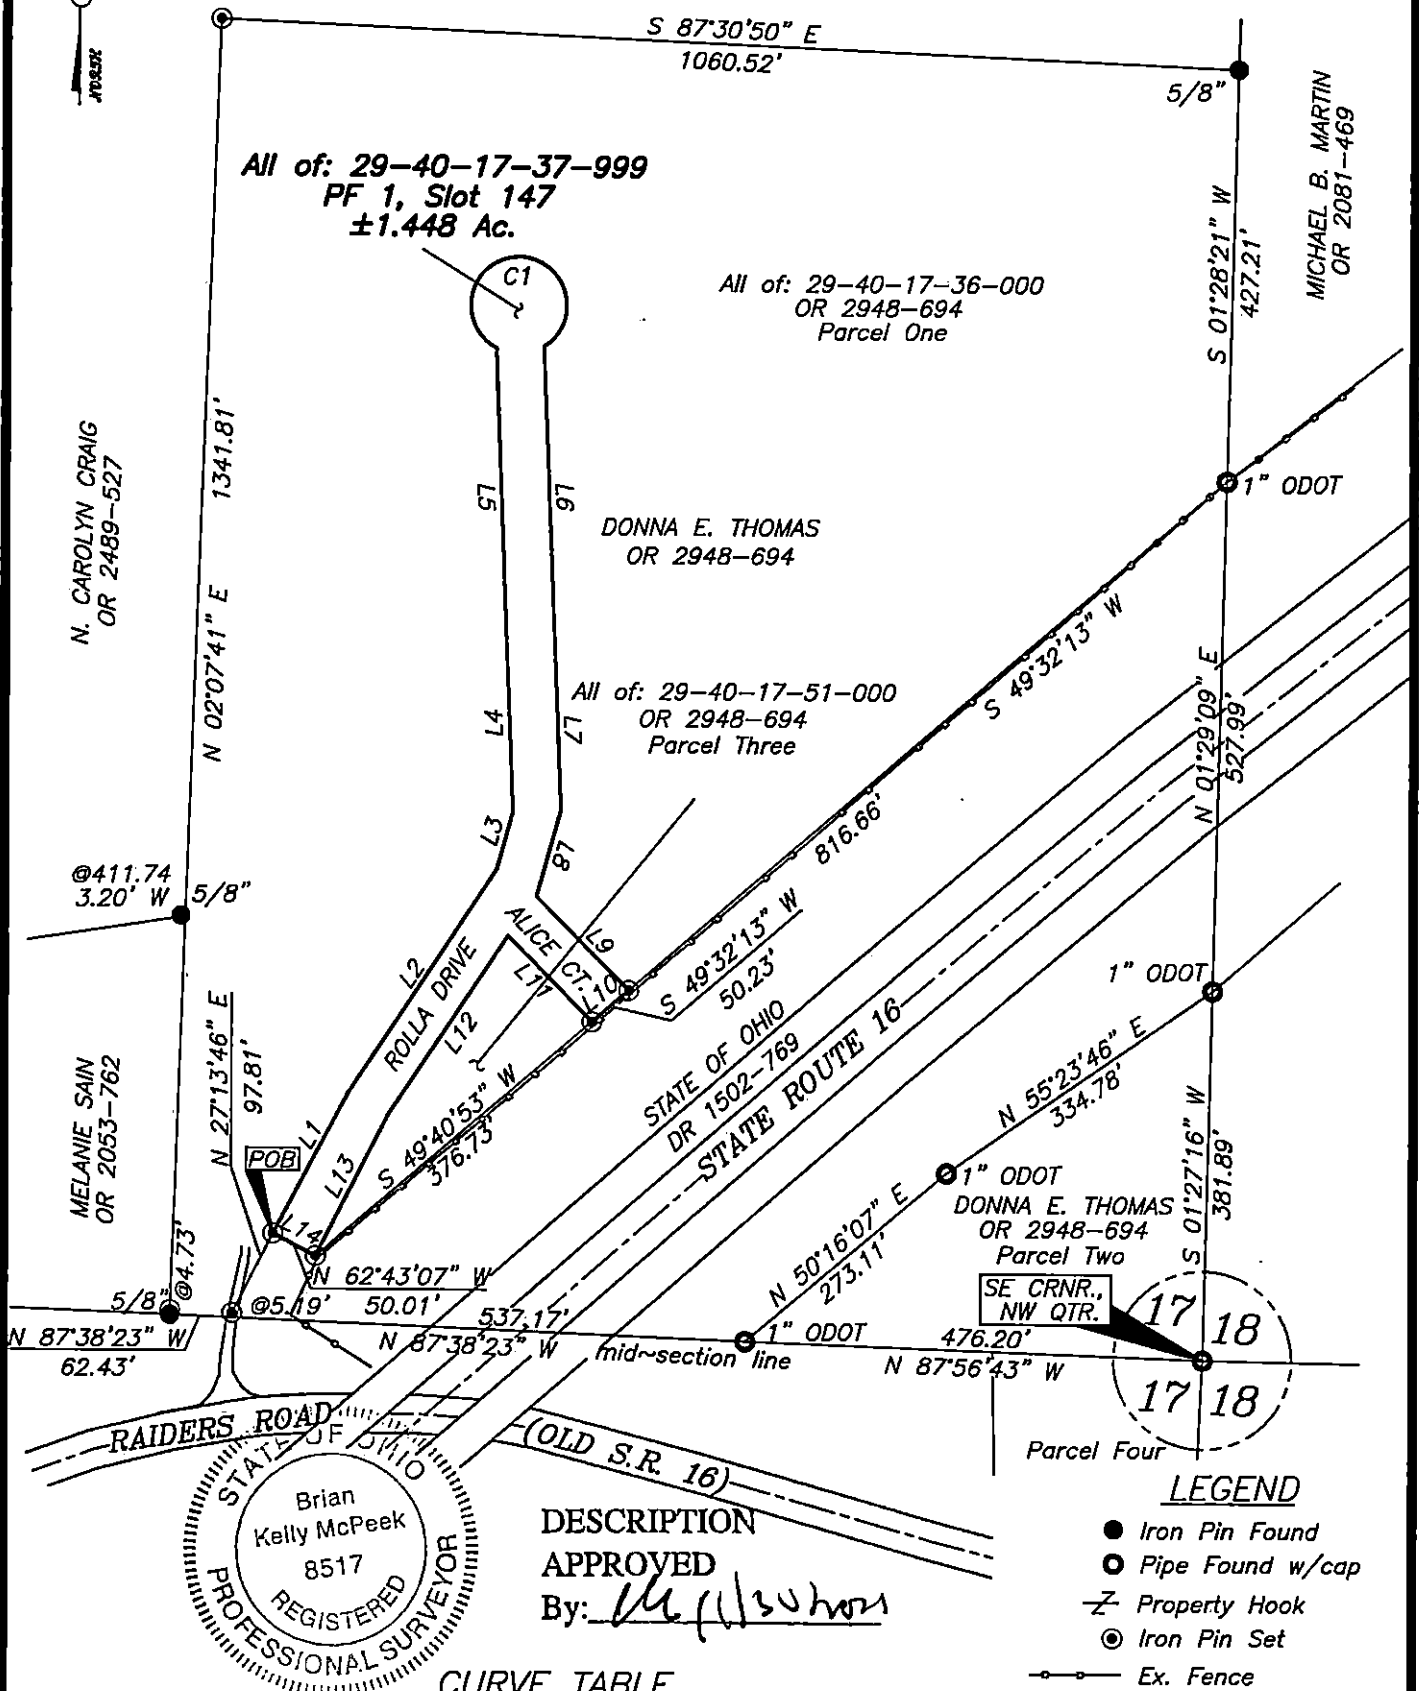


CURVE TABLE

CURVE	RADIUS	ARC LENGTH	CHORD LENGTH	CHORD BEARING	DELTA ANGLE
C1	50.00'	261.80'	50.00'	N 87°45'28" E	300°00'00"

LINE TABLE

LINE	BEARING	DISTANCE
L1	N 28°03'53" E	167.33'
L2	N 33°39'13" E	276.73'
L3	N 15°40'31" E	61.73'
L4	N 02°18'19" W	173.88'
L5	N 02°13'58" W	306.41'
L6	S 02°13'58" E	310.49'
L7	S 02°18'19" E	169.74'
L8	S 15°40'31" W	92.60'
L9	S 44°48'12" E	136.53'
L10	S 49°32'13" W	50.23'
L11	N 44°38'37" W	124.85'
L12	S 33°46'39" W	222.87'
L13	S 27°09'51" W	165.60'
L14	N 62°43'07" W	50.01'

GRAPHIC SCALE



(IN FEET)

1 inch = 200 ft.

OFFICE COPY

Brian Kelly McPeck
Reg. Surveyor No. 12517

7/2/21

NOT RECORDABLE



www.mcpecklandsurveying.com
email: brian@mcpecklandsurveying.com
340 Robin Hood Ln., Zanesville, Oh 43701 • 740.704.6073