


SITUATED IN:

State of Ohio, County of Muskingum,
Township of Muskingum,
Being part of Section 4,
Township 2, Range 8,
United States Military Lands

BASIS OF BEARINGS

Bearings are based on the Ohio State
Plane Coordinate System, NAD
83(2011), South Zone, Grid North, as
per GPS observations

LINE	BEARING	DISTANCE
L1	S 85°16'33" E	82.22'
L2	S 85°16'33" E	82.23'
L3	S 87°23'10" E	20.13'
L4	S 87°22'58" E	45.00'
L5	S 02°37'05" W	41.22'

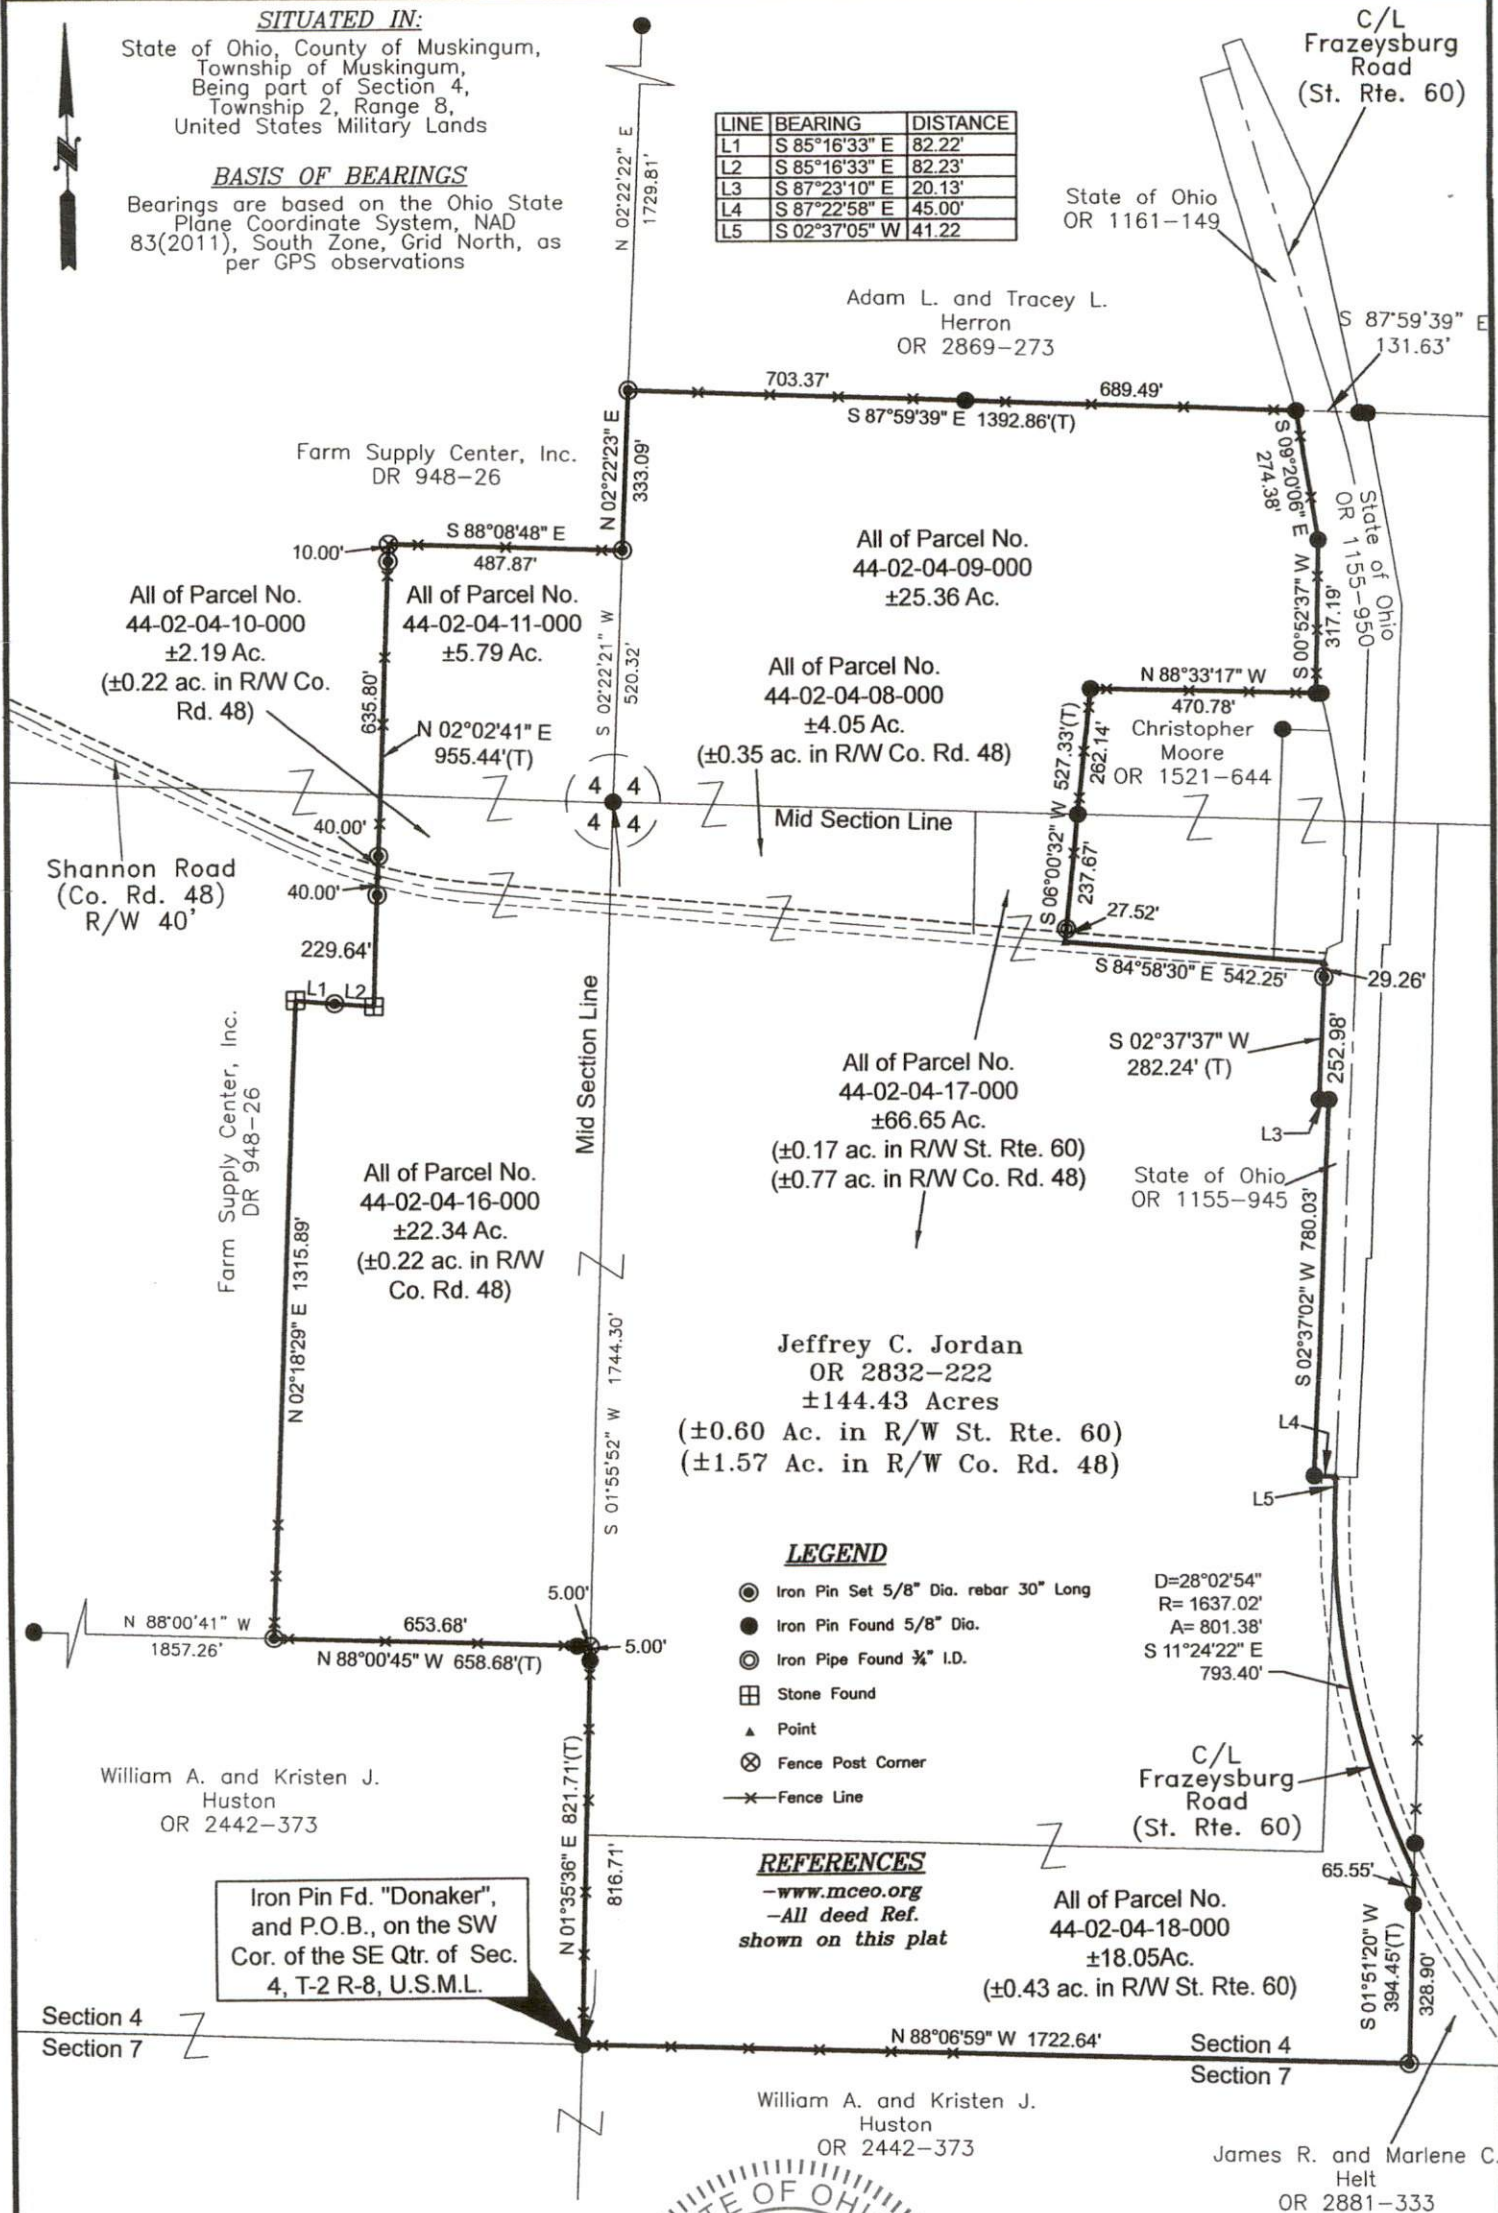

LEGEND

- Iron Pin Set 5/8" Dia. rebar 30" Long
- Iron Pin Found 5/8" Dia.
- Iron Pipe Found 3/4" I.D.
- Stone Found
- Point
- Fence Post Corner
- Fence Line

REFERENCES

-www.mceo.org
-All deed Ref.
shown on this plat

D=28°02'54"
R=1637.02'
A=801.38'
S 11°24'22" E
793.40'

Iron Pin Fd. "Donaker",
and P.O.B., on the SW
Cor. of the SE Qtr. of Sec.
4, T-2 R-8, U.S.M.L.

DESCRIPTION

APPROVED

By: *[Signature]*

OFFICE COPY

Jack D. Newcome 1-21-25

NOT RECORDABLE

Reg. Surveyor No. 7321



Newcome Surveying Company
6515 Ballard Road
Nashport, Ohio 43830
740-452-5796