

DESCRIPTION OF A 115.811 ACRE PARCEL

Situated in the State of Ohio, County of Muskingum, Township of Jackson, being a part of Sections 16 and 17 located in the 3rd Quarter, Township-3, Range-9, United States Military Lands and being a part of that 121.454 acre tract (Parcel No. 29-29301632-000 and Parcel No. 29-29401723-004) as conveyed to The Longaberger Company by deed of record in Deed Book 1141, Page 835, all references being to those of record in the Recorder's Office, Muskingum County, Ohio, said parcel being more particularly bounded and described as follows:

Commencing at a stone found marking the southeasterly corner of Section 16, the same being the southwesterly corner of Section 17;

thence along the easterly line of Section 16, **North 00°11'29" West, 661.77 feet** to an iron pin found marking the northeasterly corner of that 61.28 acre tract (Parcel Number 29-29301630-000) as conveyed to The Longaberger Company by deed of record in Deed Book 1129, Page 124, and being the Point of Beginning for the 115.811 acre parcel herein to be described;

thence along the northerly line of said The Longaberger Company tract the following five (5) courses and distances;

North 89°16'26" West, 1112.57 feet to an iron pin found;

North 11°23'13" East, 379.57 feet to an iron pin found;

North 81°58'12" West, 291.01 feet to an iron pin found;

North 00°01'24" West, 257.11 feet to an iron pin found; and . . .

North 89°59'44" West, 330.00 feet to an iron pin found;

thence **North 00°01'24" West, 396.00 feet** to an iron pin found;

DESCRIPTION OF A 115.811 ACRE PARCEL

Page 2

thence **South 89°59'44" East, 330.00 feet** to an iron pin found;

thence **North 00°01'24" West, 269.40 feet** to an iron pin found;

thence **South 89°40'18" East, 1318.29 feet** to an iron pin found in the easterly line of Section 16;

thence along said easterly line, **North 00°20'00" West, 34.78 feet** to an iron pin found marking the southwesterly corner of that 8.21 acre tract (Parcel Number 29-29401717-000) as conveyed to A. Cline by deed of record in Deed Book 811, Page 322;

thence along the southerly line of said Cline tract, **South 71°56'17" East, 257.23 feet** to an iron pin found marking the southeasterly corner of said Cline tract;

thence along the easterly line of said Cline tract the following three (3) courses and distances;

North 22°40'44" East, 268.40 feet to an iron pin found;

South 74°04'57" East, 15.54 feet to an iron pin found; and . . .

North 23°17'31" East, 568.54 feet to an iron pin found in the centerline of Township Road 316, also known as Cannon Road, marking the northeasterly corner of said Cline tract, passing an iron pin found at 543.22 feet;

thence along said centerline the following seven (7) courses and distances;

South 57°31'12" East, 636.96 feet to a point;

South 54°51'18" East, 256.50 feet to a point;

South 52°54'53" East, 805.91 feet to a railroad spike found;

South 58°07'20" East, 213.77 feet to a railroad spike found;

South 59°14'41" East, 58.02 feet to a point of curvature to the right;

Southeasterly along the arc of said curve to the right (Radius = 500.15', Delta= 35°28'44"), a chord bearing and distance of **South 41°30'19" East, 304.78 feet** to a point of tangency; and . . .

South 23°52'20" East, 133.29 feet to a P.K. nail found marking the intersection of the centerline of Cannon Road with the centerline of Raider Road, old State Route 16;

DESCRIPTION OF A 115.811 ACRE PARCEL

Page 3

thence along the centerline of Raider Road, **South 57°46'00" West, 1259.76 feet** to a point marking the southeasterly corner of that 6.943 acre tract (Parcel Number 29-29401723.002) as conveyed to Bennie L. and Patsy J. Foggin by deed of record in Deed Book 1893, Page 943;

thence leaving the centerline of Raiders Road along the easterly line of said Foggin tract, **North 44°57'18" West, 430.69 feet** to an iron pin found marking the northeasterly corner of said Foggin tract, passing an iron pin found at 30.76 feet;

thence along the northerly line of said Foggin tract, **South 40°13'06" West, 644.42 feet** to an iron pin found, passing an iron pin found at 416.95 feet;

thence **North 48°37'11" West, 896.85 feet** to an iron pin found in the westerly line of Section 17;


thence along the westerly line of Section 17, **South 00°20'00" East, 327.72 feet** to the Point of Beginning containing **115.811 acres**, (which 41.309 acres lies within Section 16 and 74.502 acres lies within Section 17), more or less, according to a survey made by Jobes Henderson & Associates, Inc. during January of 2006.

The bearings in the above description are based on bearings taken from the Ohio Department of Highway right-of-way plans for old State Route 16 entitled 'SR16 MUS-16-0-00'.

Subject to all valid and existing easements, restrictions, and conditions of record.

June 9, 2011

S:/06/06-003/legals/06-003-115.811 acres



**OFFICE COPY
NOT RECORDABLE**

Jeremy L. Van Ostran, P.S.
Surveyor No. 8283

DESCRIPTION

APPROVED

By: [Signature] 6/10/2011

BOUNDARY SURVEY

Being a part of Sections 16, 17 & 24, 3rd Qtr., Township-3, Range 9,
United States Military Lands, Jackson Township, Muskingum County, Ohio

MARTIN FARM #20
DESCRIPTION OF A 115.811 ACRE PARCEL

Situated in the State of Ohio, County of Muskingum, Township of Jackson, being a part of Sections 16 and 17 located in the 3rd Quarter, Township-3, Range-9, United States Military Lands and being a part of that 121.454 acre tract (Parcel No. 29-29301632-000 and Parcel No. 29-29401723-004) as conveyed to The Longaberger Company by deed of record in Deed Book 1141, Page 835, all references being to those of record in the Recorder's Office, Muskingum County, Ohio, said parcel being more particularly bounded and described as follows:

Commencing at a stone found marking the southeasterly corner of Section 16, the same being the southwesterly corner of Section 17;

thence along the easterly line of Section 16, North 00°11'29" West, 661.77 feet to an iron pin found marking the northeasterly corner of that 61.28 acre tract (Parcel Number 29-29301630-000) as conveyed to The Longaberger Company by deed of record in Deed Book 1129, Page 124, and being the Point of Beginning for the 115.811 acre parcel herein to be described;

thence along the northerly line of said The Longaberger Company tract the following five (5) courses and distances;

North 89°16'26" West, 1112.57 feet to an iron pin found;

North 11°23'13" East, 379.57 feet to an iron pin found;

North 81°58'12" West, 291.01 feet to an iron pin found;

North 00°01'24" West, 257.11 feet to an iron pin found; and . . .

North 89°59'44" West, 330.00 feet to an iron pin found;

thence North 00°01'24" West, 396.00 feet to an iron pin found;

thence South 89°59'44" East, 330.00 feet to an iron pin found;

thence North 00°01'24" West, 269.40 feet to an iron pin found;

thence South 89°40'18" East, 1318.29 feet to an iron pin found in the easterly line of Section 16;

thence along said easterly line, North 00°20'00" West, 34.78 feet to an iron pin found marking the southwesterly corner of that 8.21 acre tract (Parcel Number 29-29401717-000) as conveyed to A. Cline by deed of record in Deed Book 811, Page 322;

thence along the southerly line of said Cline tract, South 71°56'17" East, 257.23 feet to an iron pin found marking the southeasterly corner of said Cline tract;

thence along the easterly line of said Cline tract the following three (3) courses and distances;

North 22°40'44" East, 268.40 feet to an iron pin found;

South 74°04'57" East, 15.54 feet to an iron pin found; and . . .

North 23°17'31" East, 568.54 feet to an iron pin found in the centerline of Township Road 316, also known as Cannon Road, marking the northeasterly corner of said Cline tract, passing an iron pin found at 543.22 feet;

thence along said centerline the following seven (7) courses and distances;

South 57°31'12" East, 636.96 feet to a point;

South 54°51'18" East, 256.50 feet to a point;

South 52°54'53" East, 805.91 feet to a railroad spike found;

South 58°07'20" East, 213.77 feet to a railroad spike found;

South 59°14'41" East, 58.02 feet to a point of curvature to the right;

Southeasterly along the arc of said curve to the right (Radius = 500.15', Delta = 35°28'44"), a chord bearing and distance of South 41°30'19" East, 304.78 feet to a point of tangency; and . . .

South 23°52'20" East, 133.29 feet to a P.K. nail found marking the intersection of the centerline of Cannon Road with the centerline of Raider Road, old State Route 16;

thence along the centerline of Raider Road, South 57°46'00" West, 1259.76 feet to a point marking the southeasterly corner of that 6.943 acre tract (Parcel Number 29-29401723.002) as conveyed to Bennie L. and Patsy J. Foggin by deed of record in Deed Book 1893, Page 943;

thence leaving the centerline of Raiders Road along the easterly line of said Foggin tract, North 44°57'18" West, 430.69 feet to an iron pin found marking the northeasterly corner of said Foggin tract, passing an iron pin found at 30.76 feet;


thence along the northerly line of said Foggin tract, South 40°13'06" West, 644.42 feet to an iron pin found, passing an iron pin found at 416.95 feet;

thence North 48°37'11" West, 896.85 feet to an iron pin found in the westerly line of Section 17;

thence along the westerly line of Section 17, South 00°20'00" East, 327.72 feet to the Point of Beginning containing 115.811 acres, (which 41.309 acres lies within Section 16 and 74.502 acres lies within Section 17), more or less, according to a survey made by Jobes Henderson & Associates, Inc. during January of 2006.

The bearings in the above description are based on bearings taken from the Ohio Department of Highway right-of-way plans for old State Route 16 entitled 'SR16 MUS-16-0-00'.

Subject to all valid and existing easements, restrictions, and conditions of record.

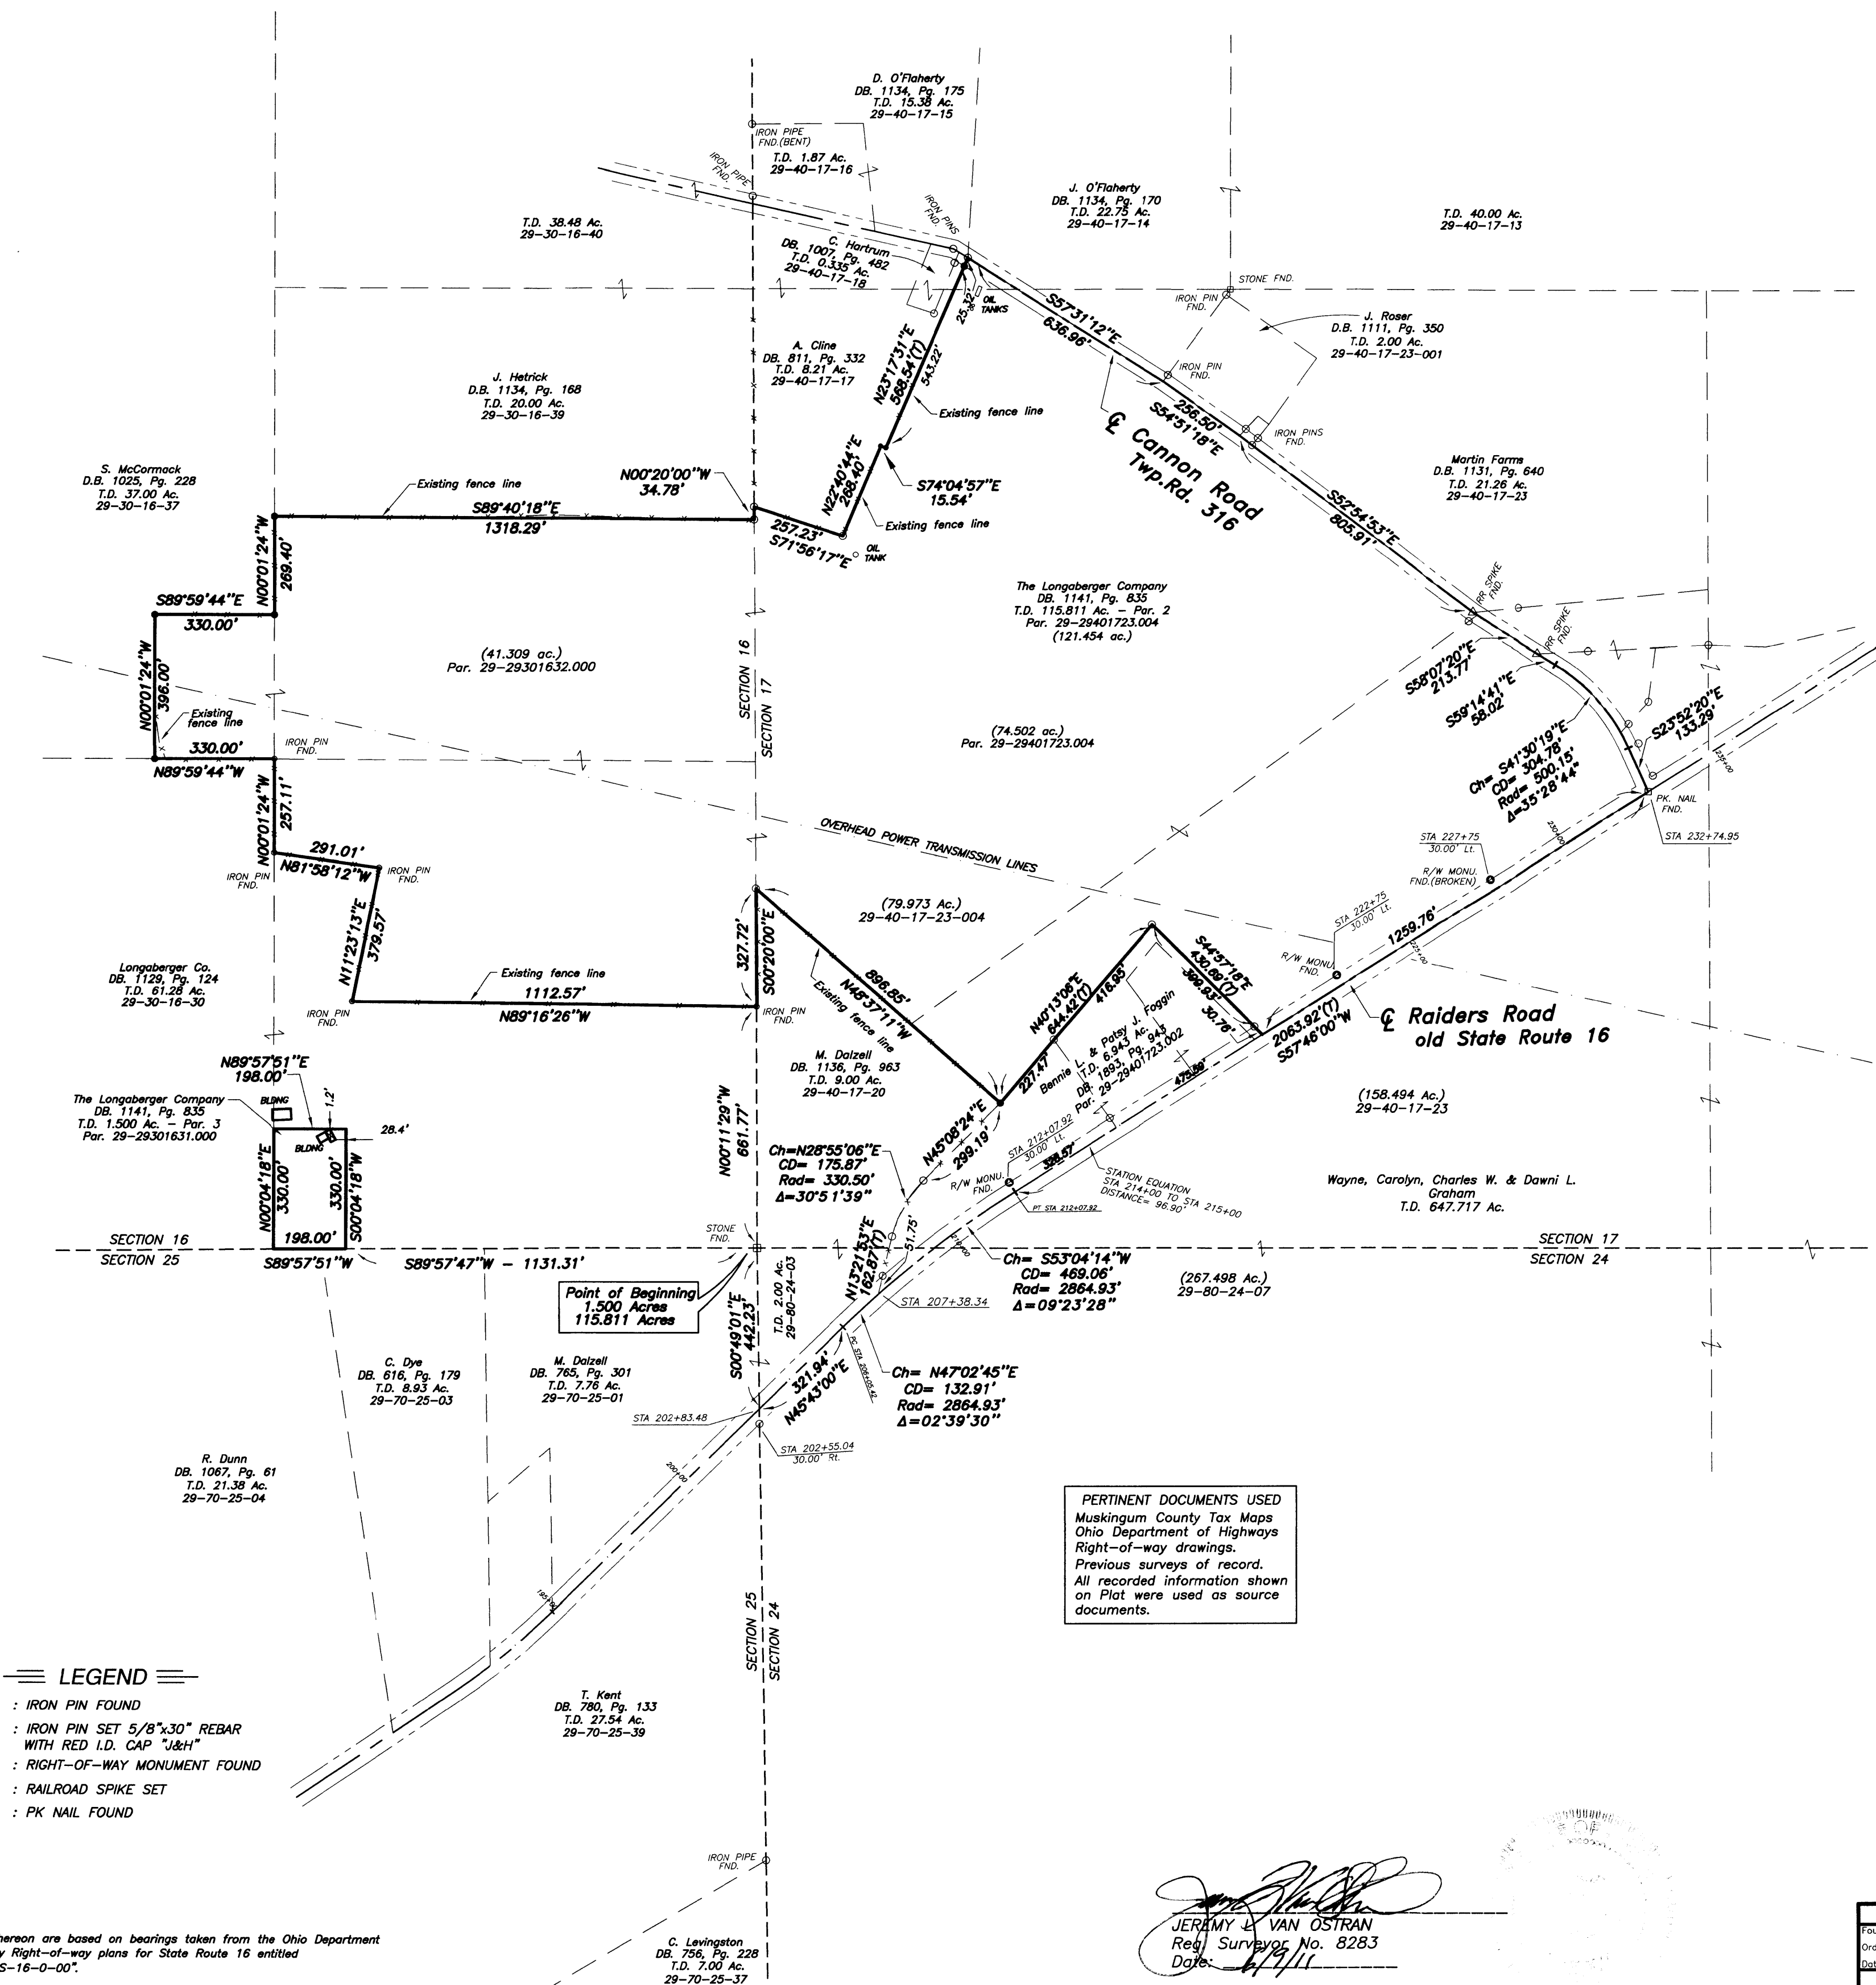

PERTINENT DOCUMENTS USED
Muskingum County Tax Maps
Ohio Department of Highways
Right-of-way drawings.
Previous surveys of record.
All recorded information shown
on Plat were used as source
documents.

JEREMY L. VAN OSTRA
Reg. Surveyor No. 8283
Date: 1/11

RECEIVED		58 GRANT STREET NEWARK, OHIO 43055	
Foundation Survey	Final Survey		
Ord. No.	Ord. No.		
Date	Date		
REVISED		Drawn: J/LK	
		Checked: SLM	
		C.B.	
JOBES HENDERSON & ASSOCIATES INC.		TEL: (740)344-5451 FAX: (740)344-5746	
CIVIL ENGINEERING & LAND SURVEYING			

Boundary Survey for The Longaberger Company	DWG. NO.
	06-003
	DATE: 01-20-06
	SHT. 1 OF 2