73-36-01-16-004 B

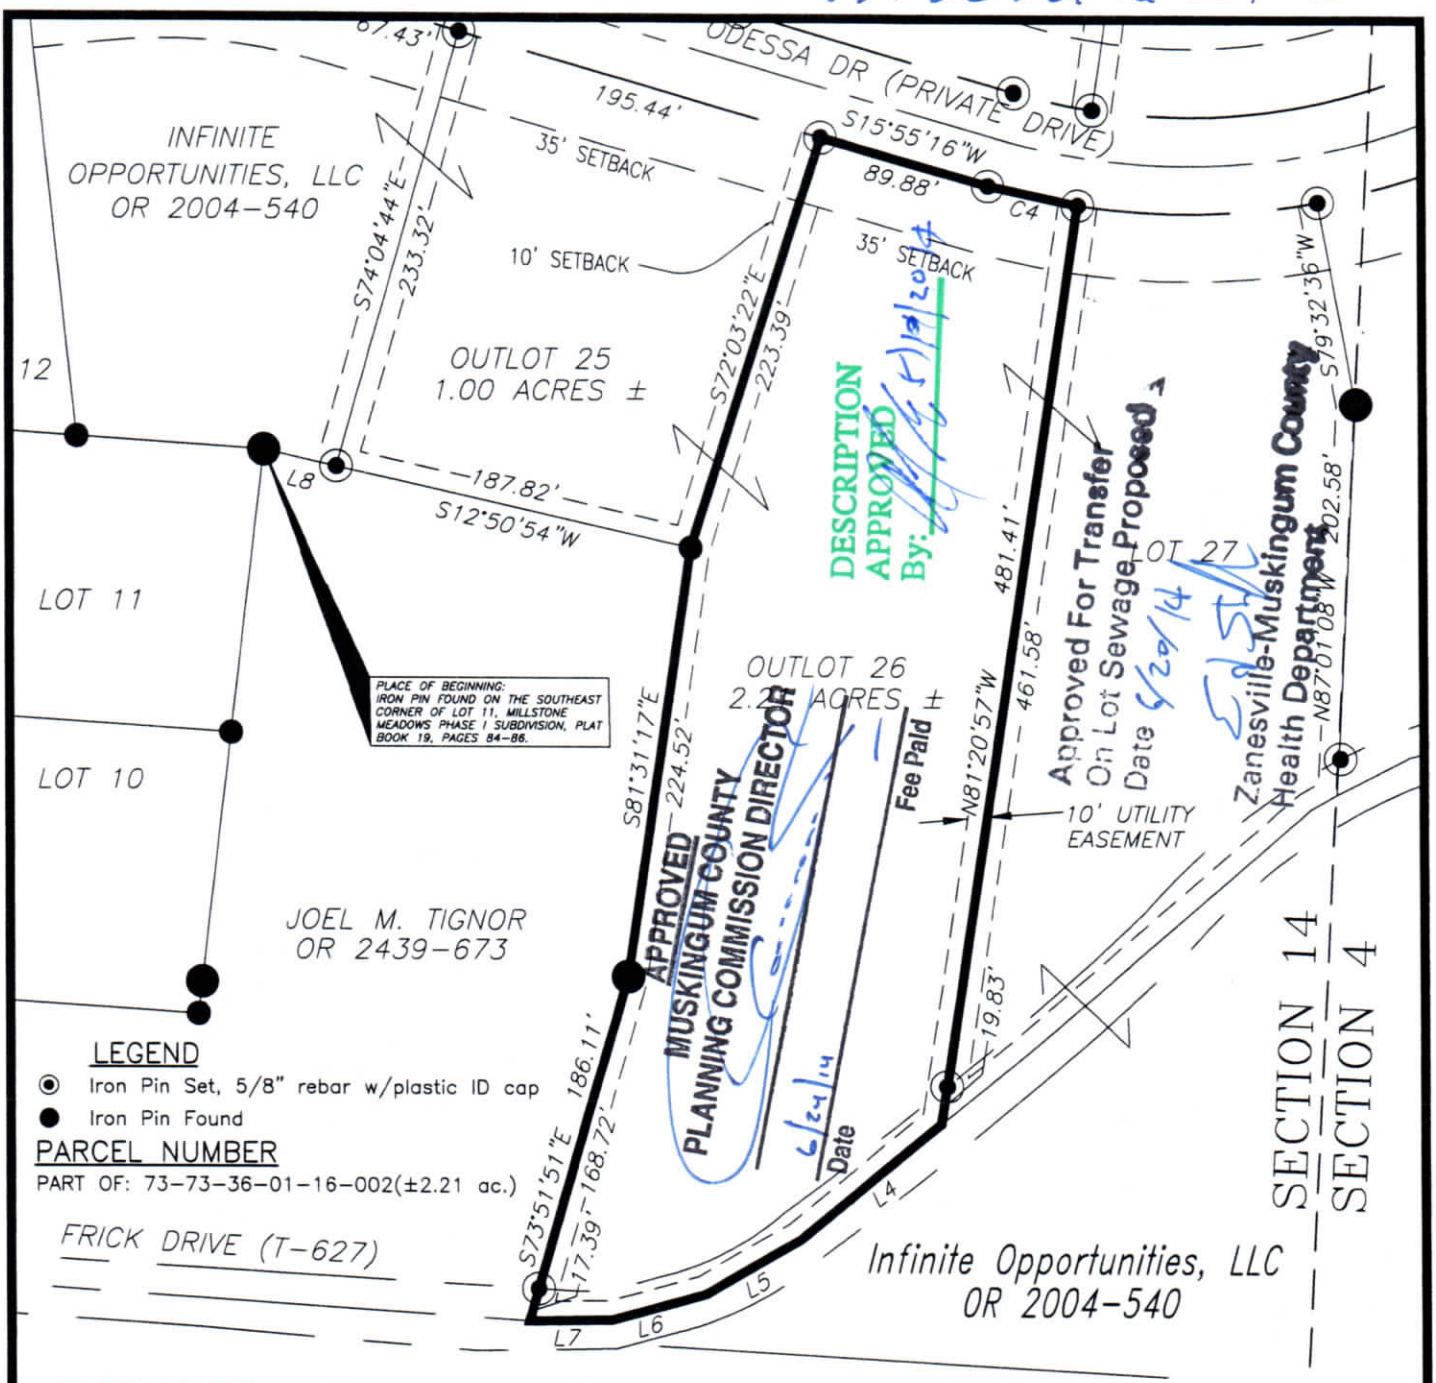

LEGEND

- ◉ Iron Pin Set, 5/8" rebar w/plastic ID cap
- ● Iron Pin Found

PARCEL NUMBER

PART OF: 73-73-36-01-16-002(±2.21 ac.)

BASIS OF BEARINGS

Bearings are based on NAD 83, Ohio State Plane Coordinate System, South Zone, Grid North, as per GPS observations made on October 7, 2013.

REFERENCES

OR 2004-540
OR 2439-673
Muskingum County GIS Data
Plat Book 19, Pages 84-86

SITUATED IN:

The State of Ohio, County of Muskingum, Wayne Township, and being part of the Southeast Quarter of Section 14, Township 12, Range 13 of the Congress Lands East of the Scioto River.

CURVE	RADIUS	ARC LENGTH	CHORD LENGTH	CHORD BEARING	CENTRAL ANGLE
C4	375.00'	47.59'	47.55'	S 12°17'09" W	07°16'14"

LINE	BEARING	DISTANCE
L4	N 39°29'32" W	94.75'
L5	N 29°42'59" W	57.47'
L6	N 15°21'47" W	49.82'
L7	N 00°57'04" W	43.07'
L8	S 12°50'54" W	38.46'

OFFICE COPY
NOT RECORDABLE

STATE OF OHIO TIMOTHY H. LUNN 7113 REGISTERED PROFESSIONAL SURVEYOR

Timothy H. Lunn 5/16/14
Reg. Surveyor No. 7113 Date

Project No.: MIL-575

100 0 50 100 200
1 inch = 100 ft.

Linn Engineering, Inc. 740-452-7434
Civil Engineering Consultants
P.O. Box 2086 Zanesville, Ohio 43702-2086

G:\CIVIL\Mmill 575\OUTLOT 26.dwg, 5/14/2014 10:01:05 AM, TJS