

N

7945 Twp. Rd. 114 NE
New Lexington, Ohio 43784
(614) 342-2835

Bearings Shown Hereon are to an Assumed Meridian and Are Used to Denote Angles Only.
Data References: U.S.G.S. Maps, Tax Maps, Deed Descriptions, and Existing Monumentation.

This Survey is Subject to any Facts That May be Disclosed by a Full and Accurate Title Search.


LINE	BEARING	DISTANCE
L 1	S 04°30'38"W	210.20'
L 2	S 21°55'45"W	58.96'
L 3	N 68°56'08"W	128.08'
L 4	N 87°37'24"W	87.00'
L 5	S 69°25'24"W	200.54'
L 6	S 14°28'31"W	271.91'
L 7	S 48°45'38"W	203.00'
L 8	N 44°31'12"W	159.77'
L 9	N 51°02'54"E	204.07'
L 10	N 54°06'36"E	268.68'
L 11	S 21°05'06"E	209.47'
L 12	S 63°58'05"E	278.45'
L 13	N 11°15'02"W	224.53'
L 14	S 41°47'57"E	245.01'
L 15	S 41°47'11"E	158.93'

N/E Corner of
the S/E Qtr
of Section 29

East Line of Section 29
Wayne Twp.
Section 29
Salt Creek Twp.
Section 28

Reginold Winland
Carolyn Gibbons
Vol. 1038 Pg. 293

Reginold Winland
Carolyn Gibbons
Vol. 1038 Pg. 293

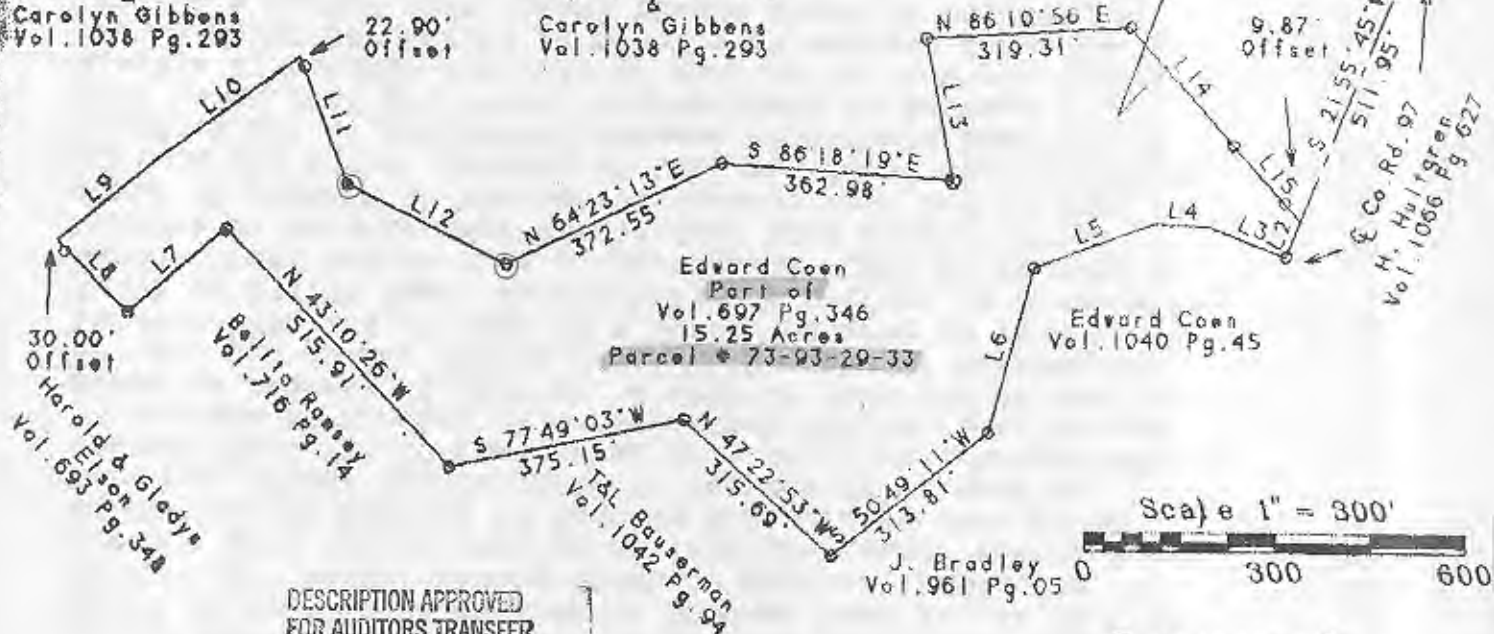

DESCRIPTION APPROVED
FOR AUDITORS TRANSFER

BY PLS
4-8-96

Kevin Cannon
Reg. # 7224

Survey For: Ed Coen
State: Ohio
County: Muskingum
Township: Wayne
T- 13 R- 12 Lot: N/A
Section: 29
City or Village: N/A
Subdivision: N/A
Parcel #: Part of 73-93-29-33



4/4/96
Date

Legend

- Iron Pin Set
- 5/8" Rebar W/Cap
- Iron Pin Found
- ⊗ Post
- ▲ R.R. Spike Set
- △ R.R. Spike Found
- ⊙ Drilled Hole 5/8"
- Stone Found
- PK Nail Set
- ⊙ PK Nail Found
- *** Fence
- ➔ Basis Of Bearings