Conventional Signs

Centerline
Township Line
Corporation Line
County Line
Fence Line
Right of Way — R/W — R/W
Railroad
Guard Rail — Proposed
Trees — Bush — Pine Tree
Existing Utilities — Water Lines — W — W
Sanitary Sewer Lines — S — S
Gas Lines — G — G
Utility Poles — Power Pole
Culverts and Sewers — Proposed — Existing
Manholes — Existing — G.M.H.
Jute Matting
Riprap
Rock Channel Protection

EAST MUSKINGUM LOCAL SCHOOL DISTRICT

PROJECT NO. 1

RELOCATED COUNTY ROAD 683

STATE OF OHIO

MUSKINGUM COUNTY

INDEX OF SHEETS

Title Sheet ---------- 1-A
Typical Sections ---------- 2-A
General Notes ---------- 3-A
General Summary Table ---------- 4-A
Plan and Profile ---------- 5-A to 6-A
Cross Sections ---------- 7-A to 20-A
Superelevation Tables ---------- 21-A
Drive Details ---------- 22-A to 23-A
Culvert Detail ---------- 24-A
Siltation Basin Detail ---------- 25-A to 26-A

1973 SPECIFICATIONS

The standard specifications of the State of Ohio, Department of Transportation, including changes and supplemental specifications listed in the proposal shall govern this improvement.

The right of way for this improvement will be provided by the East Muskingum Local School District.

I hereby approve these plans and declare that the making of this improvement will not require the closing to traffic of the highway and that provisions for the maintenance and safety of the traffic will be as set forth in the plans and estimate.

Approved _____
Date County Engineer, Muskingum County

Board of Commissioners, Muskingum County

_____ Date _____

_____ Date _____

_____ Date _____

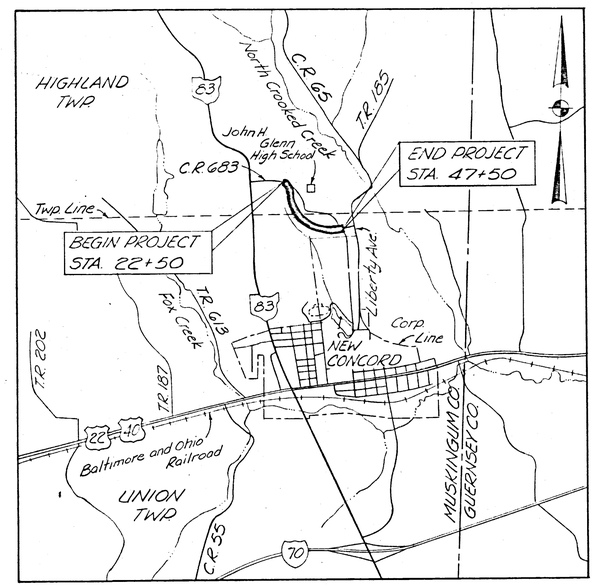

0 2000' 4000'
Scale in Feet

LOCATION MAP

Portion to be improved
Interstate and Federal Roads
State Roads
Other Roads

LINE DATA

Begin Project ---------- Sta. 22+50
End Project ---------- Sta. 47+50
Length of Project -- 2500.0 Lin. Ft. or 0.473 Miles
Begin Work ---------- Sta. 22+00
End Work ---------- Sta. 48+00
Length of Work --- 2600.0 Lin. Ft. or 0.492 Miles

STANDARD DRAWINGS	
BP-2	12-1-68
BP-5	6-1-72
BP-6	6-1-65
GR-28	11-9-71
GR-4	11-9-71
HW-4	1-1-70
L-1	6-1-73
MC-4	6-13-69

SCALE

Plan — 0 50' 100'
Profile Horizontal — 0 50' 100'
Profile Vertical — 0 10' 20'
Cross Sections — 0 10' 20'

SUPPLEMENTAL SPECIFICATIONS	
1001	9-20-72

PREPARED AND RECOMMENDED BY
W.E. QUICKSALL AND ASSOCIATES, INC.
CONSULTING ENGINEERS
NEW PHILADELPHIA, OHIO

C-683

MARR KNAPP CRAWFIS
REGISTERED ARCHITECTS, INC. AIA
NEW PHILADELPHIA OHIO
MANSFIELD OHIO

JOB NO. | DRAWN BY | SHEET
REVISIONS | SCALE AS NOTED | OF
DATE

DIETZGEN